

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P493028

Luminaire Tested: **LDA2B059027R65D010 2LBD1GPH**

Issue Date: 3/8/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P493028  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-66)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/8/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B059027R65D010 2LBD1GPH  
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 2700K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 608.7 lumens  
Efficiency: N/A  
Efficacy: 87.0 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.95  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P493028

CATALOG NUMBER: LDA2B059027R65D010 2LBD1GPH

### Luminous Intensity Polar Plot

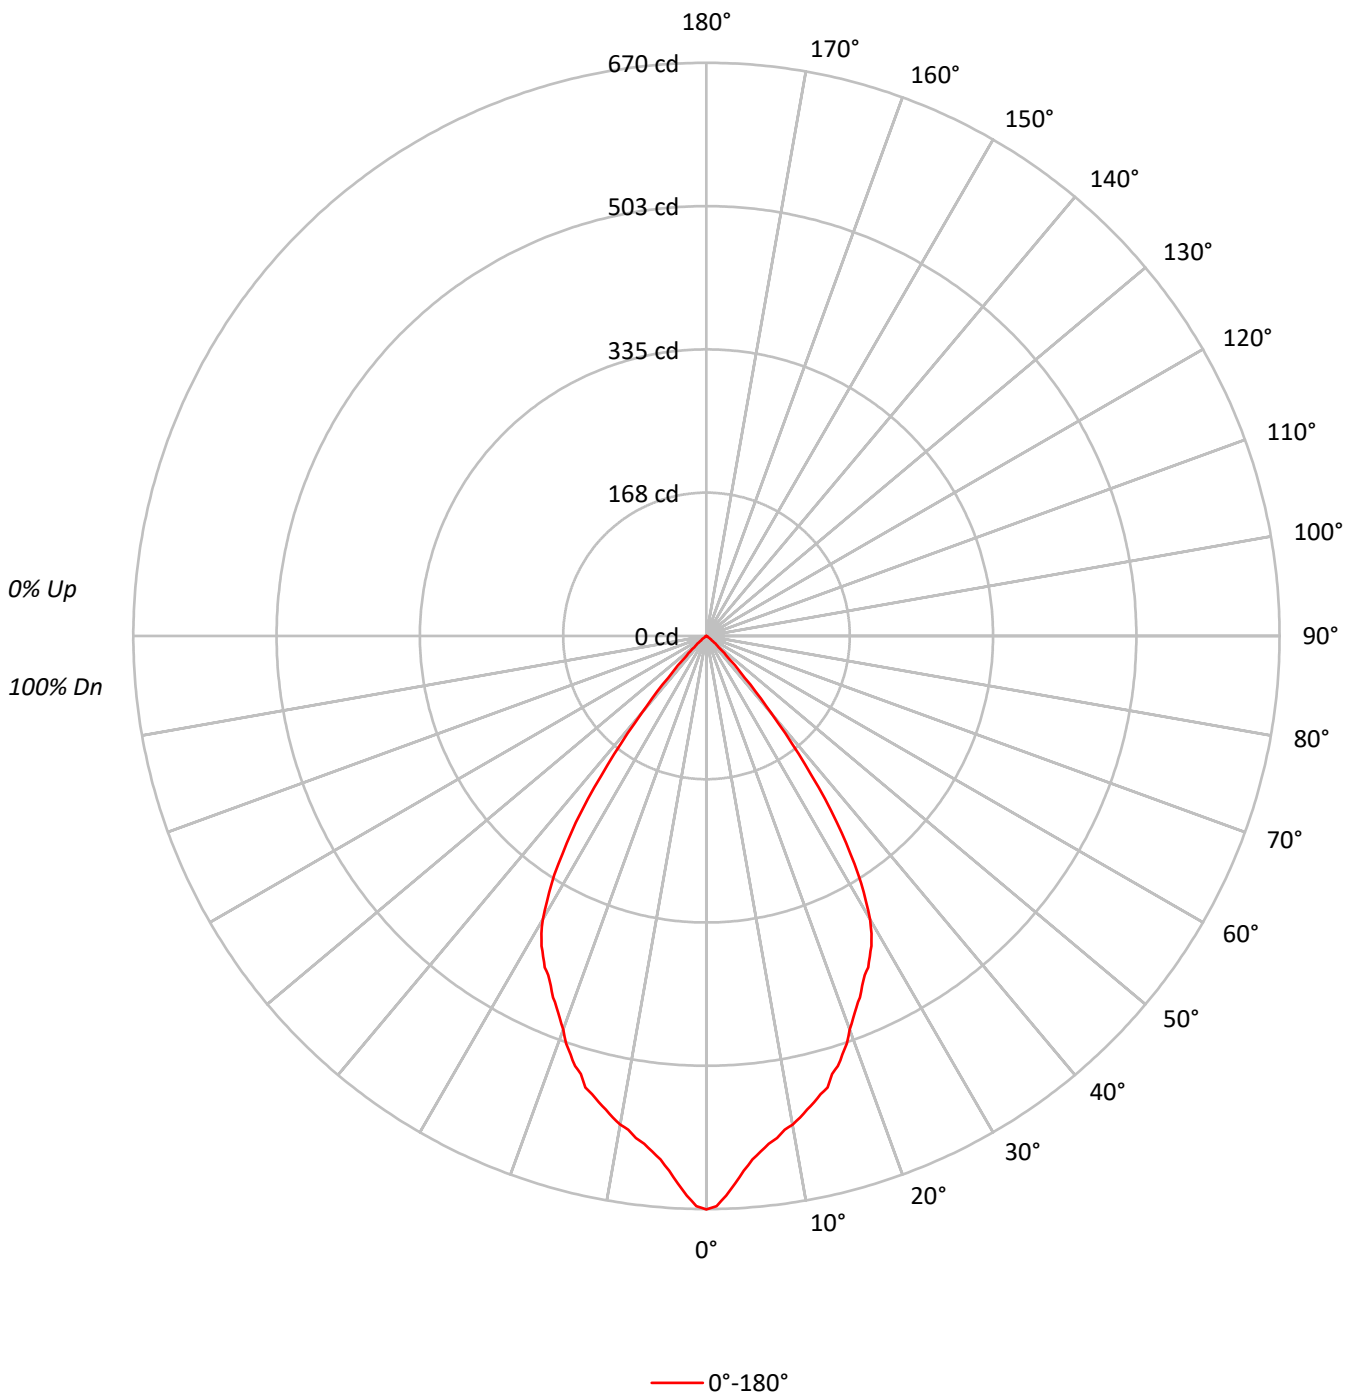



TEST NUMBER: P493028

CATALOG NUMBER: LDA2B059027R65D010 2LBD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111		106	106	106		102	102	102	100
1	113	111	108	106	111	109	106	104	104	103	101		101	99	98		97	96	95	93
2	108	103	99	95	106	101	97	94	98	95	92		95	92	90		92	90	88	87
3	102	96	91	87	100	94	90	86	92	88	85		89	86	83		87	84	82	80
4	97	89	84	79	95	88	83	79	86	82	78		84	80	77		82	79	76	75
5	92	83	78	73	90	82	77	73	81	76	72		79	75	72		77	74	71	69
6	87	78	72	68	86	77	72	67	76	71	67		74	70	66		73	69	66	65
7	83	73	67	63	81	73	67	63	71	66	62		70	65	62		69	65	62	60
8	78	69	63	58	77	68	62	58	67	62	58		66	61	58		65	61	58	56
9	75	65	59	55	73	64	58	54	63	58	54		62	58	54		61	57	54	53
10	71	61	55	51	70	61	55	51	60	55	51		59	54	51		58	54	51	49

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	330750
5°	304180
10°	290664
15°	279185
20°	257105
25°	238105
30°	218189
35°	160268
40°	75868
45°	24978
50°	8059
55°	1032
60°	592
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P493028

CATALOG NUMBER: LDA2B059027R65D010 2LBD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	57.7	9.5
10°-20°	152.0	25.0
20°-30°	201.6	33.1
30°-40°	159.5	26.2
40°-50°	34.8	5.7
50°-60°	2.6	0.4
60°-70°	0.3	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	411.3	67.6
0°-40°	570.9	93.8
0°-60°	608.3	99.9
0°-90°	608.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	608.7	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	670	
5°	614	58
15°	547	152
25°	437	202
35°	266	160
45°	36	35
55°	1	3
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P493028

CATALOG NUMBER: LDA2B059027R65D010 2LBD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	670.4
1°	666.8
2°	654.5
3°	641.0
4°	626.8
5°	614.2
6°	606.1
7°	598.0
8°	592.6
9°	584.4
10°	580.2
11°	573.6
12°	566.1
13°	559.5
14°	552.0
15°	546.6
16°	532.7
17°	525.8
18°	514.4
19°	503.9
20°	489.7
21°	478.3
22.5°	463.3
23°	459.1
24°	447.6
25°	437.4
26°	431.1
27°	420.6
28°	410.4
29°	398.0
30°	383.0
32.5°	330.7
35°	266.1
37.5°	189.7
40°	117.8
42.5°	66.4
45°	35.8
47.5°	19.2
50°	10.5
52.5°	4.5
55°	1.2
57.5°	0.6
60°	0.6
62.5°	0.3
65°	0.3



TEST NUMBER: P493028

CATALOG NUMBER: LDA2B059027R65D010 2LBD1GPH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)