

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: PORTFOLIO

Report Number: P493879

Luminaire Tested: **LDA2B059050R60D010 2LBDL1GPH**

Issue Date: 3/9/2021

This test was performed under the Supervised Manufacturer's Testing Program. The results of this test have not been influenced by sources from within Cooper Lighting Solutions or from external interests.



**Test Information**

Test Method: LM-79-08  
Report Number: P493879  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2011-037-55)  
Test Lab: INNOVATION CENTER  
Issue Date: 3/9/2021  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDA2B059050R60D010 2LBDL1GPH  
Description: 500 LUMEN 2IN ADJUSTABLE LED LUMINAIRE WITH 90 CRI LEDS AND 5000K CCT LEDS  
Light Source: -  
Ballast/Driver: -

Luminaire Equipment: Sample No.    Condition    Description

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 621.9 lumens  
Efficiency: N/A  
Efficacy: 88.8 lumens/watt  
Spacing Criteria (0/90/45): 0.9 / 0.9 / 0.86  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct

Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P493879

CATALOG NUMBER: LDA2B059050R60D010 2LBDL1GPH

### Luminous Intensity Polar Plot

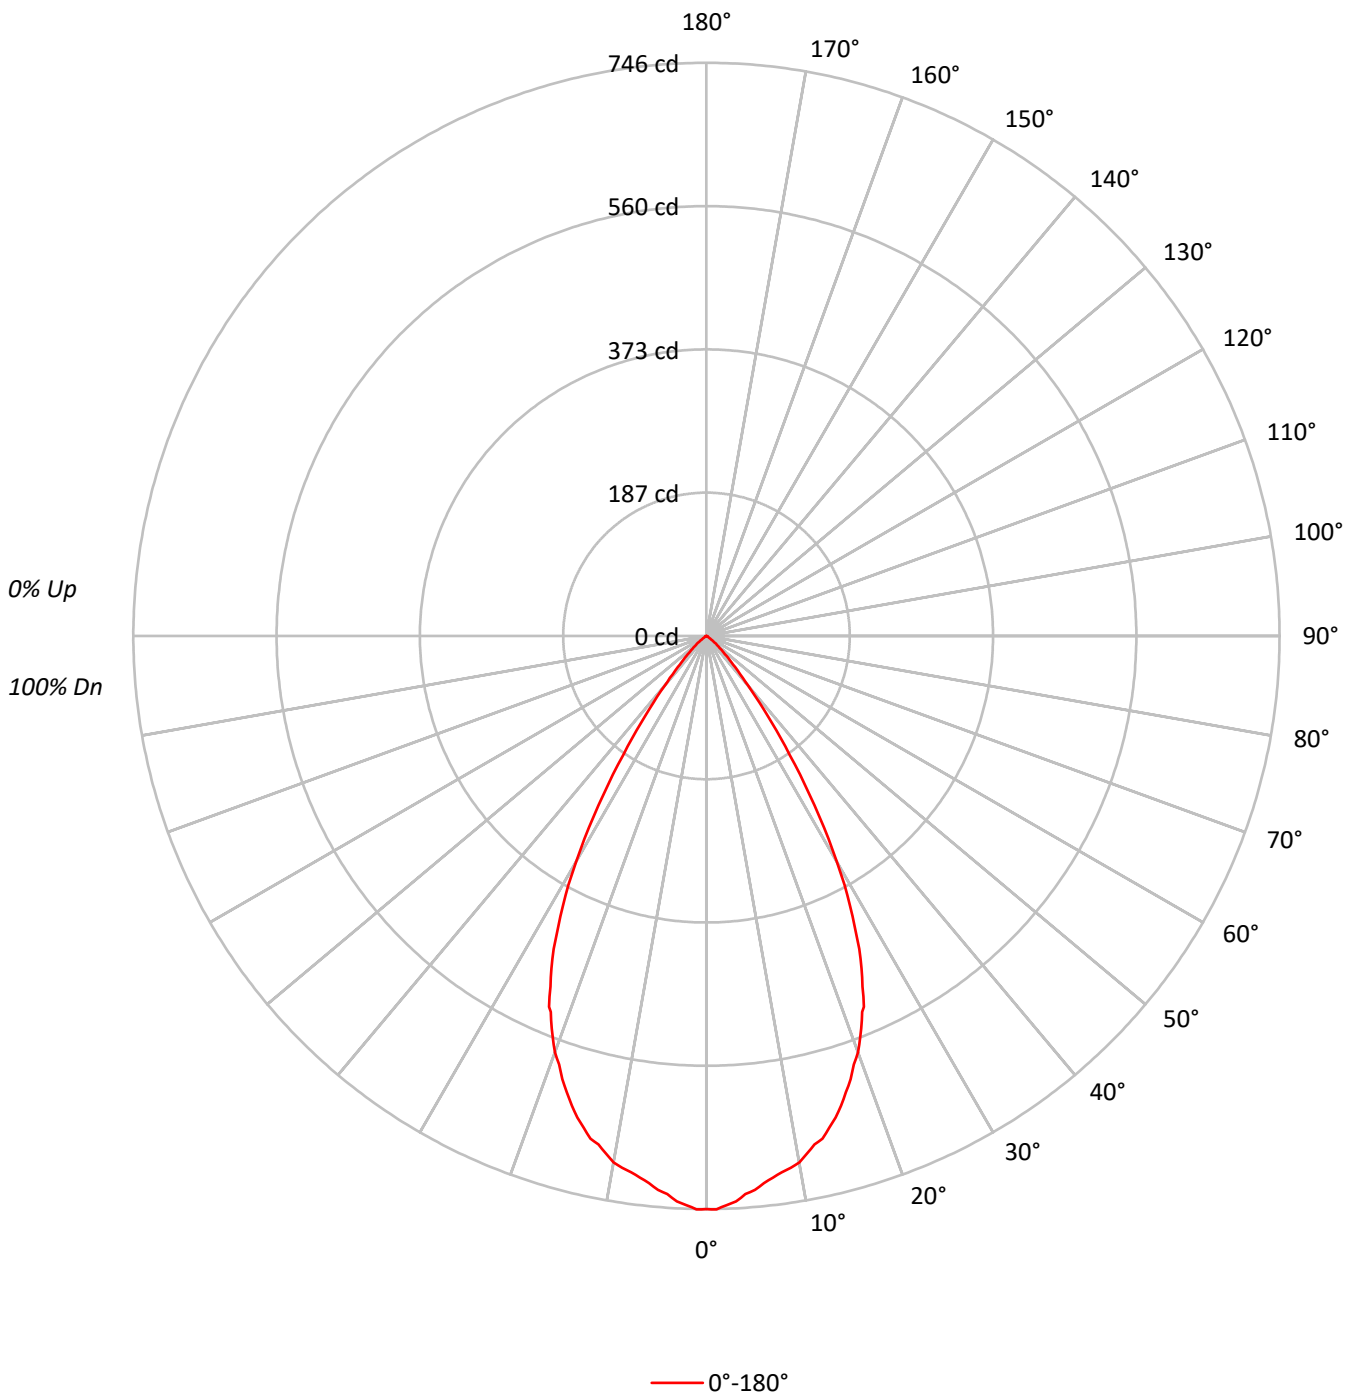



TEST NUMBER: P493879

CATALOG NUMBER: LDA2B059050R60D010 2LBDL1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	106	111	109	107	105	105	103	101	101	100	98	98	97	96	94
2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88
3	103	97	92	88	101	95	91	87	93	89	86	90	87	85	88	85	83	82
4	98	91	85	81	96	89	84	81	87	83	80	85	82	79	83	80	78	76
5	93	85	79	75	91	84	79	75	82	78	74	81	77	73	79	76	73	71
6	89	80	74	70	87	79	74	70	78	73	69	76	72	69	75	71	68	67
7	84	75	69	65	83	74	69	65	73	68	65	72	68	64	71	67	64	63
8	80	71	65	61	79	70	65	61	69	64	61	68	64	60	67	63	60	59
9	76	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55
10	73	64	58	54	72	63	58	54	62	57	54	61	57	54	61	57	54	52

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	368147
5°	358509
10°	348627
15°	331385
20°	302782
25°	259988
30°	193465
35°	113591
40°	54099
45°	25257
50°	12588
55°	4387
60°	987
65°	817
70°	433
75°	572
80°	0
85°	0



TEST NUMBER: P493879

CATALOG NUMBER: LDA2B059050R60D010 2LBDL1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	68.1	11.0
10°-20°	180.5	29.0
20°-30°	214.3	34.5
30°-40°	121.0	19.5
40°-50°	31.5	5.1
50°-60°	5.7	0.9
60°-70°	0.6	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	463.0	74.4
0°-40°	584.0	93.9
0°-60°	621.1	99.9
0°-90°	621.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	621.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	746	
5°	724	68
15°	649	181
25°	478	214
35°	189	121
45°	36	31
55°	5	6
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P493879

CATALOG NUMBER: LDA2B059050R60D010 2LBDL1GPH

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	746.2
1°	746.5
2°	741.4
3°	736.9
4°	728.4
5°	723.9
6°	716.1
7°	710.3
8°	704.8
9°	701.1
10°	695.9
11°	686.0
12°	676.8
13°	671.7
14°	659.7
15°	648.8
16°	636.1
17°	621.1
18°	606.8
19°	589.7
20°	576.7
21°	558.9
22.5°	529.6
23°	524.4
24°	499.5
25°	477.6
26°	453.4
27°	425.3
28°	397.7
29°	370.7
30°	339.6
32.5°	261.4
35°	188.6
37.5°	128.8
40°	84.0
42.5°	55.0
45°	36.2
47.5°	24.6
50°	16.4
52.5°	10.2
55°	5.1
57.5°	2.0
60°	1.0
62.5°	0.7
65°	0.7



TEST NUMBER: P493879

CATALOG NUMBER: LDA2B059050R60D010 2LBDL1GPH

**CANDELA DISTRIBUTION (continued):**

	0°
67.5°	0.3
70°	0.3
72.5°	0.3
75°	0.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

(END OF REPORT)