

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P315591

Luminaire Tested: **LDA2B05WFL9035D010 PIN1MW**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P315591  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1809-951-61)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B05WFL9035D010 PIN1MW  
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND  
2in Adj PinHole, Black oculus, matte white finish  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 554.0 lumens  
Efficiency: N/A  
Efficacy: 79.1 lumens/watt  
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.68  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P315591

CATALOG NUMBER: LDA2B05WFL9035D010 PIN1MW

### Luminous Intensity Polar Plot

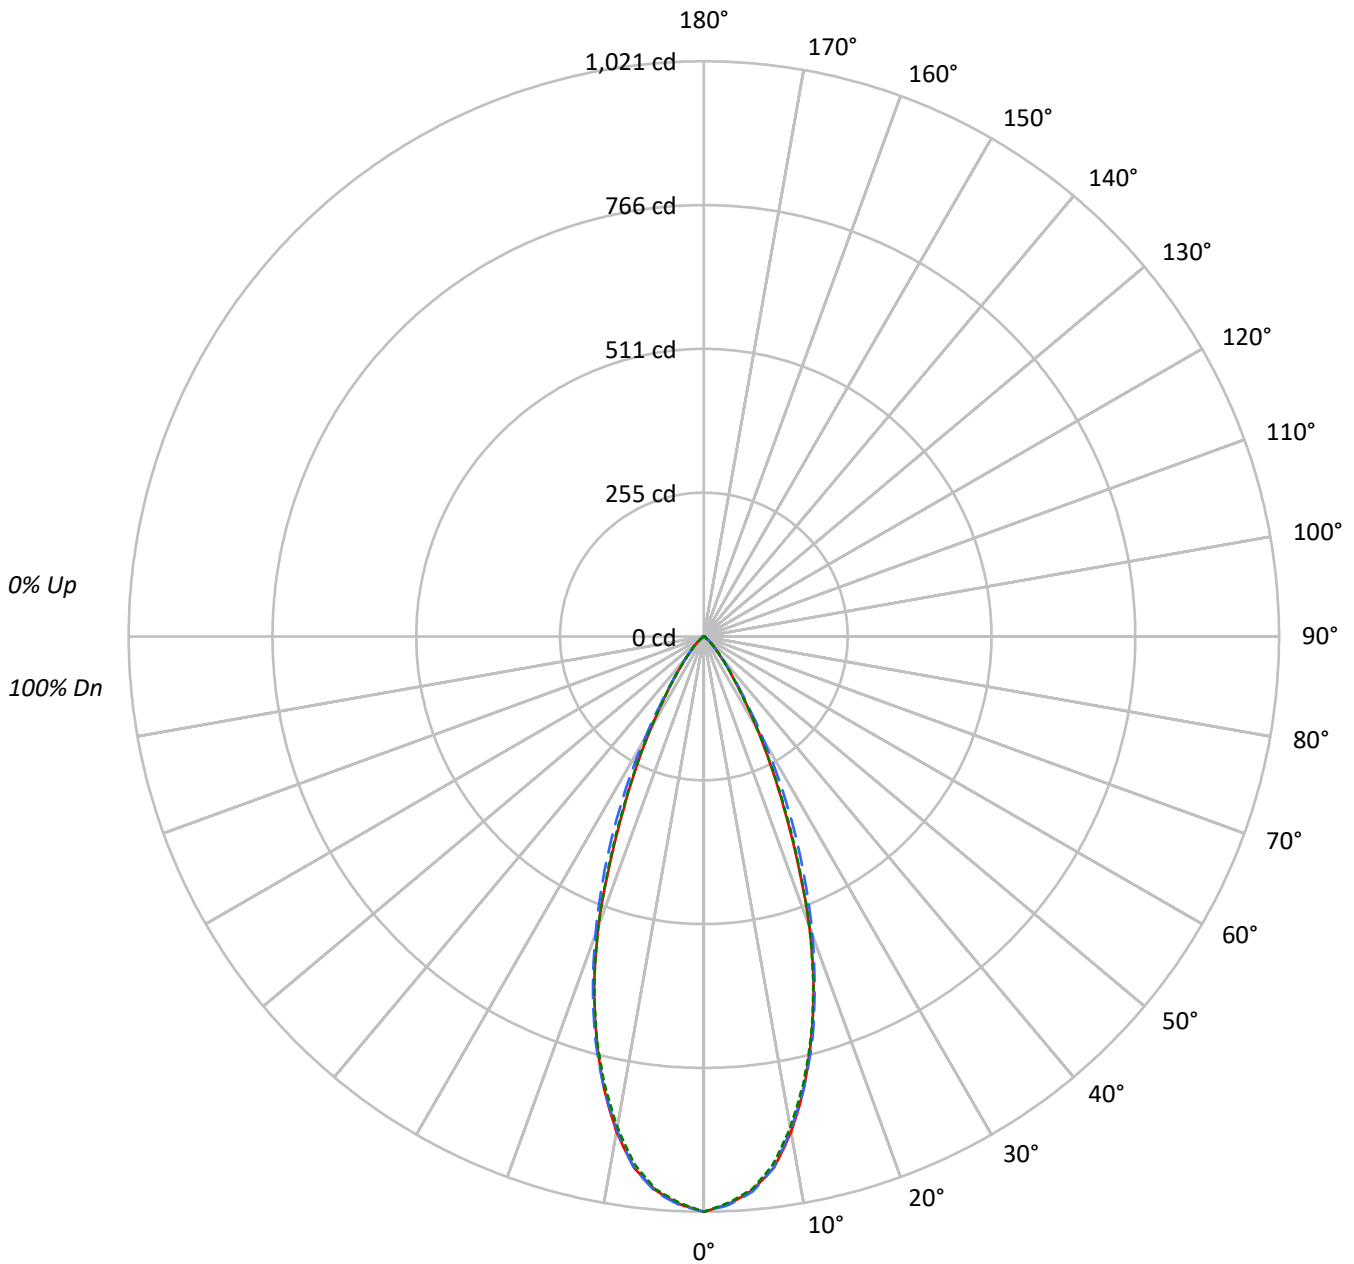



TEST NUMBER: P315591

CATALOG NUMBER: LDA2B05WFL9035D010 PIN1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89																			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	87	90	87	85	84																			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	81	86	83	81	79																			
5	95	88	82	79	94	87	82	78	85	81	78	83	80	77	82	79	76	75																			
6	91	83	78	74	90	82	77	74	81	77	73	80	76	73	78	75	72	71																			
7	87	79	74	70	86	78	73	70	77	73	69	76	72	69	75	71	69	67																			
8	84	75	70	66	83	75	70	66	74	69	66	73	69	66	72	68	65	64																			
9	81	72	67	63	80	71	66	63	71	66	63	70	66	63	69	65	62	61																			
10	77	69	64	60	76	68	63	60	68	63	60	67	63	60	66	62	60	58																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	503821	503821	503821
5°	488709	489898	487669
10°	447319	445565	442860
15°	376281	379754	375668
20°	287766	295379	287293
25°	182743	205988	186282
30°	106246	119976	108126
35°	56193	59747	56374
40°	29626	30978	29626
45°	16606	17234	16815
50°	7752	9824	7752
55°	2838	5333	3097
60°	3256	3256	3256
65°	3502	3852	3502
70°	4327	3895	4327
75°	4003	4003	4003
80°	4262	3409	4262
85°	3396	3396	3396



TEST NUMBER: P315591

CATALOG NUMBER: LDA2B05WFL9035D010 PIN1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	91.2	16.5
10°-20°	203.0	36.6
20°-30°	163.9	29.6
30°-40°	64.8	11.7
40°-50°	19.9	3.6
50°-60°	5.1	0.9
60°-70°	3.1	0.6
70°-80°	2.3	0.4
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	458.1	82.7
0°-40°	522.8	94.4
0°-60°	547.9	98.9
0°-90°	554.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	554.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1021	1021	1021	1021	1021	
5°	987	989	989	987	985	91
15°	737	739	744	740	736	202
25°	336	352	378	358	342	156
35°	93	96	99	96	94	62
45°	24	24	25	24	24	19
55°	3	4	6	4	4	4
65°	3	3	3	3	3	3
75°	2	2	2	2	2	2
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P315591

CATALOG NUMBER: LDA2B05WFL9035D010 PIN1MW

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1021.2	1021.2	1021.2	1021.2	1021.2
2.5°	1008.5	1009.1	1010.0	1008.8	1005.8
5°	986.8	988.6	989.2	987.1	984.7
7.5°	951.1	949.1	950.8	947.3	944.3
10°	892.9	890.2	889.4	884.0	884.0
12.5°	821.0	820.1	820.7	818.1	813.9
15°	736.7	738.8	743.5	740.5	735.5
17.5°	647.3	650.2	654.4	653.5	646.7
20°	548.1	556.7	562.6	557.0	547.2
22.5°	435.2	453.6	468.7	456.9	440.8
25°	335.7	351.7	378.4	358.2	342.2
27.5°	254.6	266.2	290.5	270.6	259.6
30°	186.5	193.7	210.6	197.5	189.8
32.5°	133.4	138.4	145.6	137.8	134.0
35°	93.3	95.9	99.2	96.2	93.6
37.5°	65.6	66.5	68.9	66.5	65.4
40°	46.0	46.3	48.1	46.6	46.0
42.5°	33.3	33.3	34.2	33.6	33.3
45°	23.8	24.1	24.7	24.4	24.1
47.5°	16.9	17.5	17.5	17.8	16.6
50°	10.1	12.5	12.8	12.5	10.1
52.5°	5.3	7.4	9.2	7.4	5.3
55°	3.3	4.5	6.2	4.5	3.6
57.5°	3.3	3.3	4.2	3.6	3.3
60°	3.3	3.3	3.3	3.3	3.3
62.5°	3.3	3.3	3.3	3.3	3.3
65°	3.0	3.3	3.3	3.3	3.0
67.5°	3.0	3.0	3.0	3.0	3.0
70°	3.0	3.0	2.7	3.0	3.0
72.5°	2.7	2.7	2.4	2.7	2.7
75°	2.1	2.1	2.1	2.1	2.1
77.5°	1.8	1.8	1.8	1.8	1.8
80°	1.5	1.5	1.2	1.5	1.5
82.5°	0.9	0.9	0.9	0.9	0.9
85°	0.6	0.6	0.6	0.6	0.6
87.5°	0.3	0.3	0.3	0.3	0.3
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)