

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P279378

Luminaire Tested: **LDA2B059727D010 EU2B05FL409727 2LBAD1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P279378
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-3)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B059727D010 EU2B05FL409727 2LBAD1H
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH FLOOD OPTIC AND 2in
ADJ spun Refl, Self-Flanged, H
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 596.1 lumens
Efficiency: N/A
Efficacy: 85.2 lumens/watt
Spacing Criteria (0/90/45): 0.61 / 0.61 / 0.55
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P279378

CATALOG NUMBER: LDA2B059727D010 EU2B05FL409727 2LBAD1H

Luminous Intensity Polar Plot

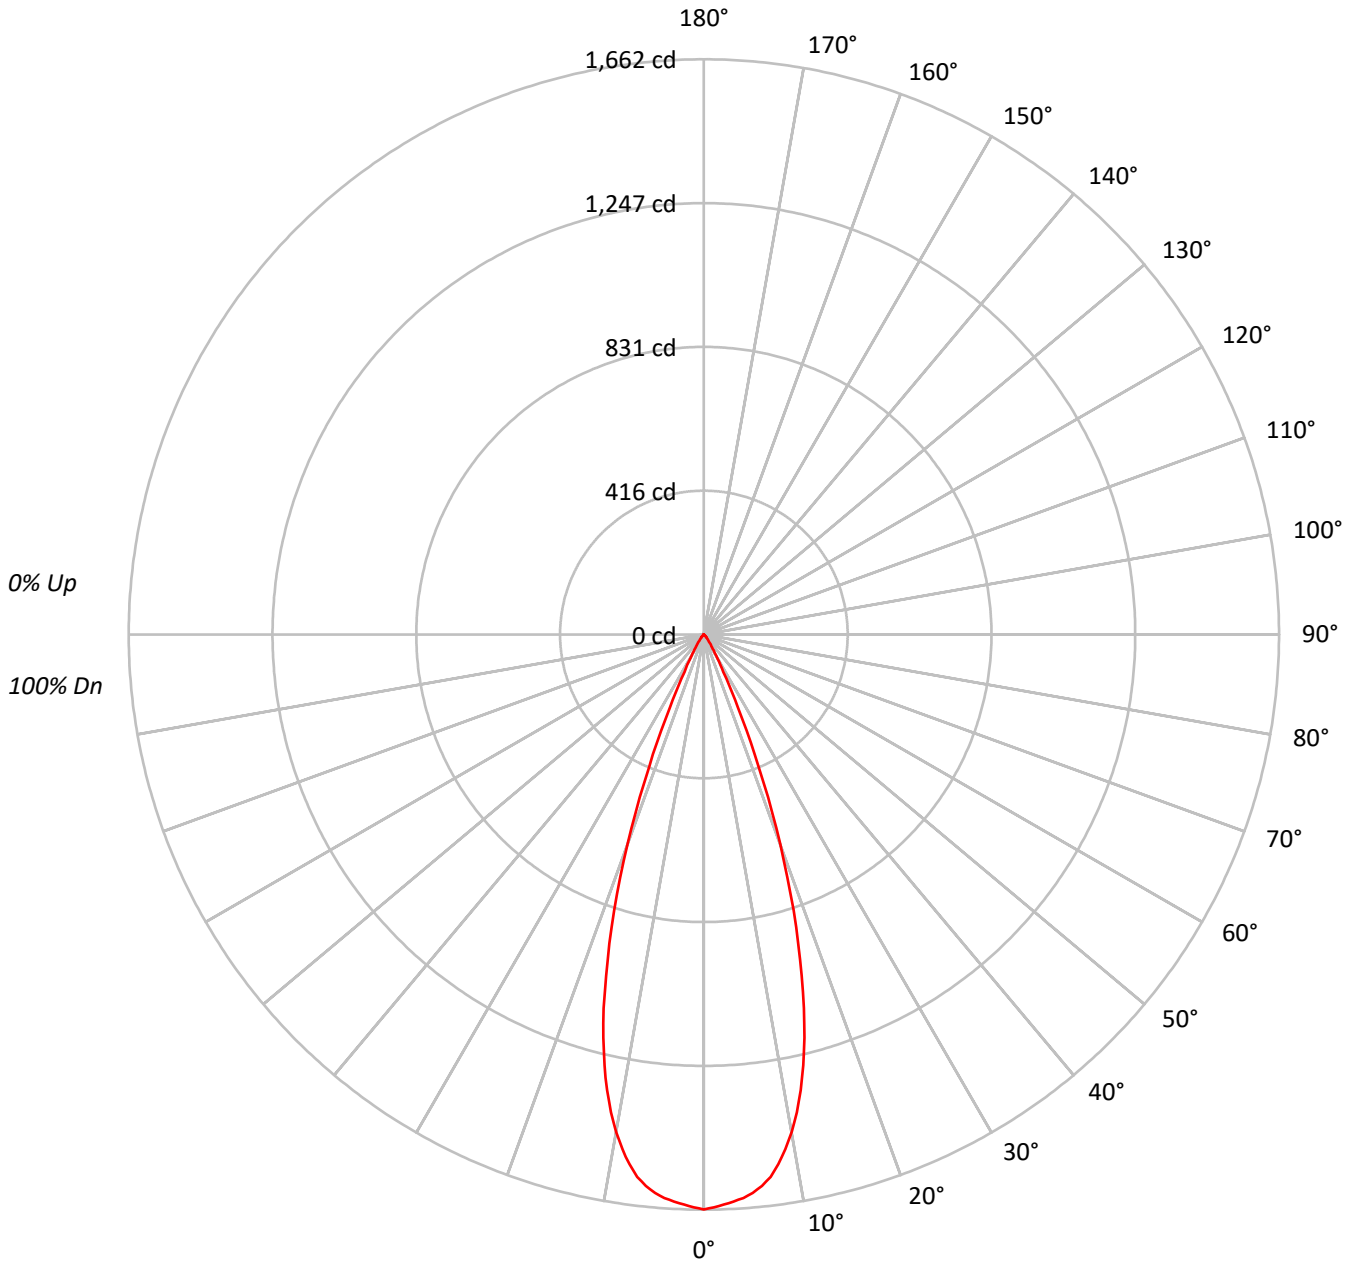



TEST NUMBER: P279378

CATALOG NUMBER: LDA2B059727D010 EU2B05FL409727 2LBAD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									20
RC	80									50									30									10									0									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																												
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																												
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																												
3	107	102	98	95	105	101	97	94	98	95	93	96	94	92	94	92	90	89																												
4	103	98	93	90	102	97	93	90	95	91	89	93	90	88	91	89	87	85																												
5	100	94	89	86	98	93	89	86	91	88	85	90	87	84	88	86	83	82																												
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																												
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																												
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																												
9	88	81	76	73	87	80	76	73	79	76	73	79	75	73	78	75	73	72																												
10	85	78	74	71	84	78	74	71	77	73	71	76	73	70	76	72	70	69																												

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	819721
5°	802349
10°	731320
15°	571291
20°	338221
25°	125748
30°	39308
35°	17466
40°	8115
45°	3837
50°	2072
55°	1204
60°	493
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P279378

CATALOG NUMBER: LDA2B059727D010 EU2B05FL409727 2LBAD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	149.8	25.1
10°-20°	297.8	50.0
20°-30°	122.0	20.5
30°-40°	20.2	3.4
40°-50°	4.8	0.8
50°-60°	1.3	0.2
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	569.6	95.5
0°-40°	589.8	98.9
0°-60°	595.8	99.9
0°-90°	596.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	596.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1662	
5°	1620	150
15°	1118	298
25°	231	122
35°	29	20
45°	6	5
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P279378

CATALOG NUMBER: LDA2B059727D010 EU2B05FL409727 2LBAD1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1661.5
1°	1655.7
2°	1648.0
3°	1641.2
4°	1632.2
5°	1620.1
6°	1602.3
7°	1579.1
8°	1546.0
9°	1505.7
10°	1459.8
11°	1406.4
12°	1346.2
13°	1277.5
14°	1201.1
15°	1118.5
17.5°	887.0
20°	644.2
22.5°	412.4
25°	231.0
27.5°	121.8
30°	69.0
32.5°	43.8
35°	29.0
37.5°	19.2
40°	12.6
42.5°	8.2
45°	5.5
47.5°	3.8
50°	2.7
52.5°	1.9
55°	1.4
57.5°	0.8
60°	0.5
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P279378

CATALOG NUMBER: LDA2B059727D010 EU2B05FL409727 2LBAD1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)