

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P280297

Luminaire Tested: **LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-41-14  
Report Number: P280297  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-5)  
Test Lab: INNOVATION CENTER(G2)  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: io LED  
Catalog Number: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH  
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND  
2in ADJ spun Refl, Self-Flanged, GPH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 625.5 lumens  
Efficiency: N/A  
Efficacy: 89.4 lumens/watt  
Spacing Criteria (0/90/45): 0.74 / 0.74 / 0.73  
Luminous Opening: Circular (Dia: 0.17' x H: 0')  
CIE Type: Direct


Input Watts (W): 7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P280297

CATALOG NUMBER: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH

### Luminous Intensity Polar Plot

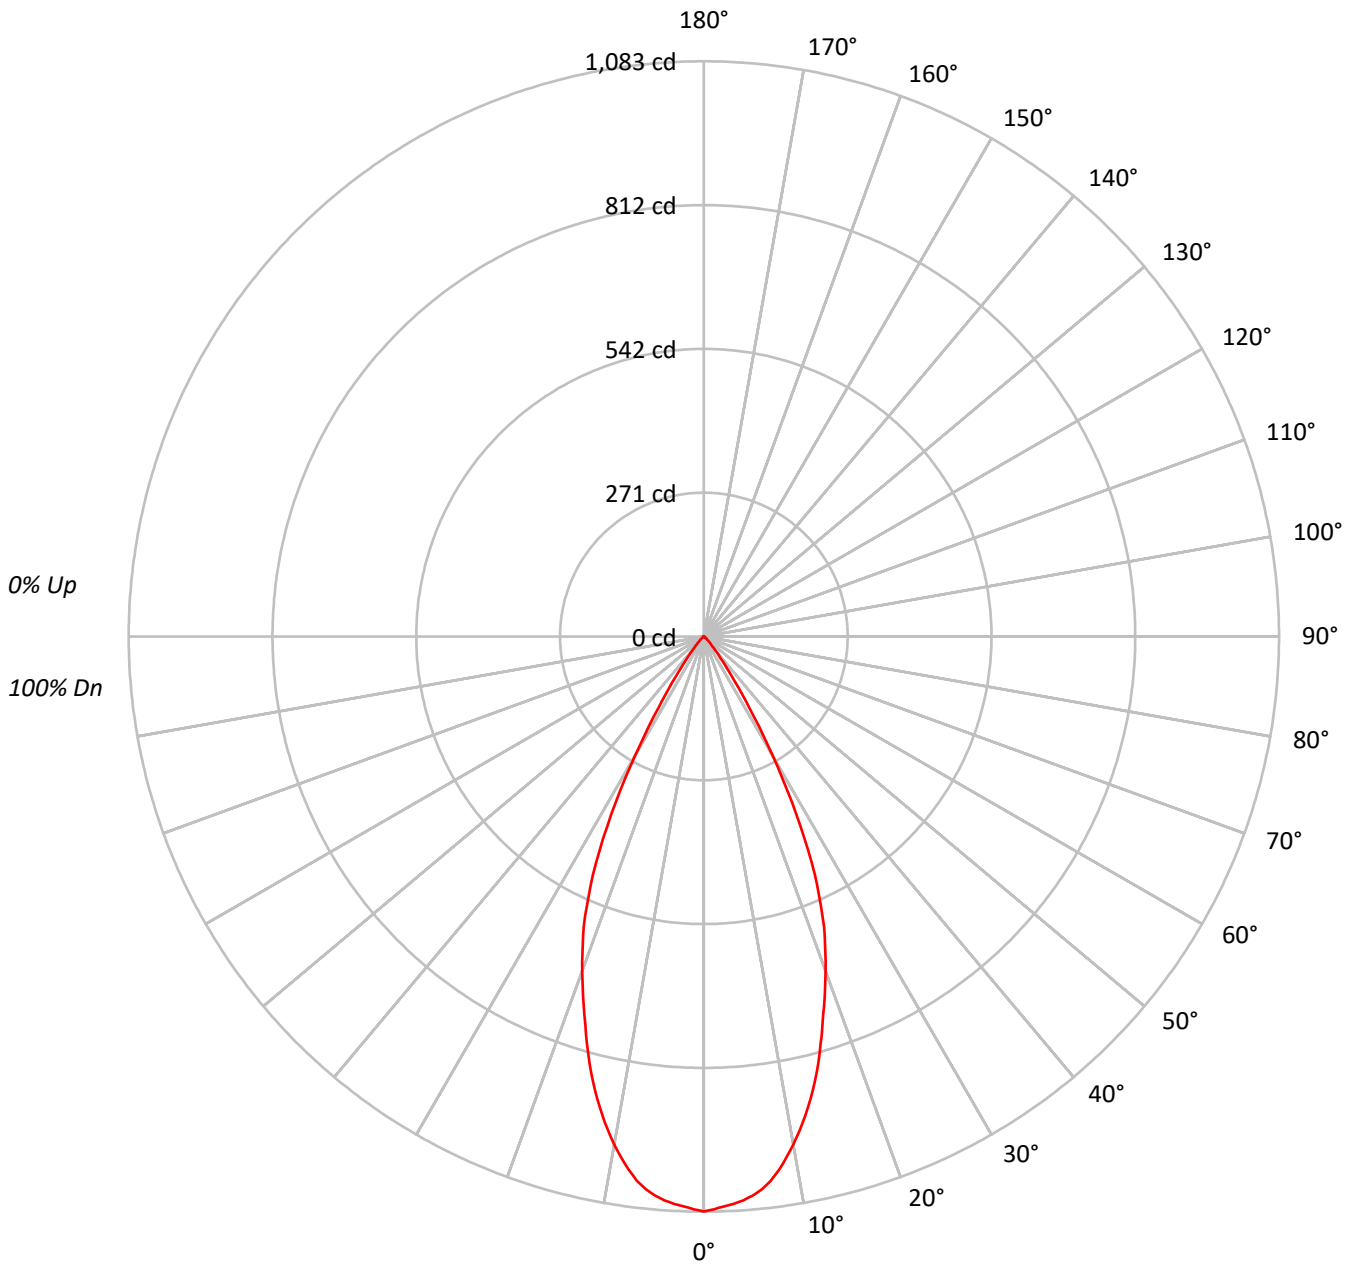



TEST NUMBER: P280297

CATALOG NUMBER: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	114	112	109	107	112	110	108	106	106	104	103	102	101	99	98	97	97	95		
2	109	105	101	98	107	103	100	97	100	98	95	97	95	93	95	93	91	90		
3	105	99	95	91	103	98	94	91	95	92	89	93	90	88	91	88	86	85		
4	100	94	89	85	99	93	88	85	91	87	84	89	85	83	87	84	82	80		
5	96	89	84	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76		
6	92	84	79	75	91	84	79	75	82	78	75	81	77	74	80	76	74	72		
7	88	80	75	71	87	80	75	71	78	74	71	77	73	70	76	73	70	69		
8	85	76	71	68	84	76	71	67	75	70	67	74	70	67	73	69	67	65		
9	81	73	68	64	80	72	68	64	72	67	64	71	67	64	70	66	64	62		
10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	534163
5°	523277
10°	486645
15°	424906
20°	351767
25°	269025
30°	147207
35°	54507
40°	18870
45°	8512
50°	3991
55°	1978
60°	592
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P280297

CATALOG NUMBER: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.2	15.7
10°-20°	229.9	36.8
20°-30°	217.3	34.7
30°-40°	66.9	10.7
40°-50°	10.6	1.7
50°-60°	2.3	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	545.4	87.2
0°-40°	612.3	97.9
0°-60°	625.1	99.9
0°-90°	625.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	625.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1083	
5°	1057	98
15°	832	230
25°	494	217
35°	90	67
45°	12	11
55°	2	2
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P280297

CATALOG NUMBER: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1082.7
1°	1078.7
2°	1073.7
3°	1069.7
4°	1064.5
5°	1056.6
6°	1046.5
7°	1032.9
8°	1014.6
9°	993.4
10°	971.4
11°	947.0
12°	921.2
13°	893.0
14°	863.8
15°	831.9
17.5°	747.4
20°	670.0
22.5°	591.4
25°	494.2
27.5°	377.1
30°	258.4
32.5°	158.7
35°	90.5
37.5°	50.5
40°	29.3
42.5°	18.3
45°	12.2
47.5°	8.1
50°	5.2
52.5°	3.5
55°	2.3
57.5°	1.5
60°	0.6
62.5°	0.3
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P280297

CATALOG NUMBER: LDA2B059730D010 EU2B05WFL559730 2LBAD1GPH

**CANDELA DISTRIBUTION (continued):**

0°  
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093







— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)