

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P277962

Luminaire Tested: **LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P277962
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1811-033-1)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H
Description: PORTFOLIO 2IN ADJ 500 LUMEN LED LUMINAIRE WITH SPOT OPTIC AND 2in
ADJ spun Refl, Self-Flanged, H
Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 595.8 lumens
Efficiency: N/A
Efficacy: 85.1 lumens/watt
Spacing Criteria (0/90/45): 0.28 / 0.28 / 0.28
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P277962

CATALOG NUMBER: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H

Luminous Intensity Polar Plot

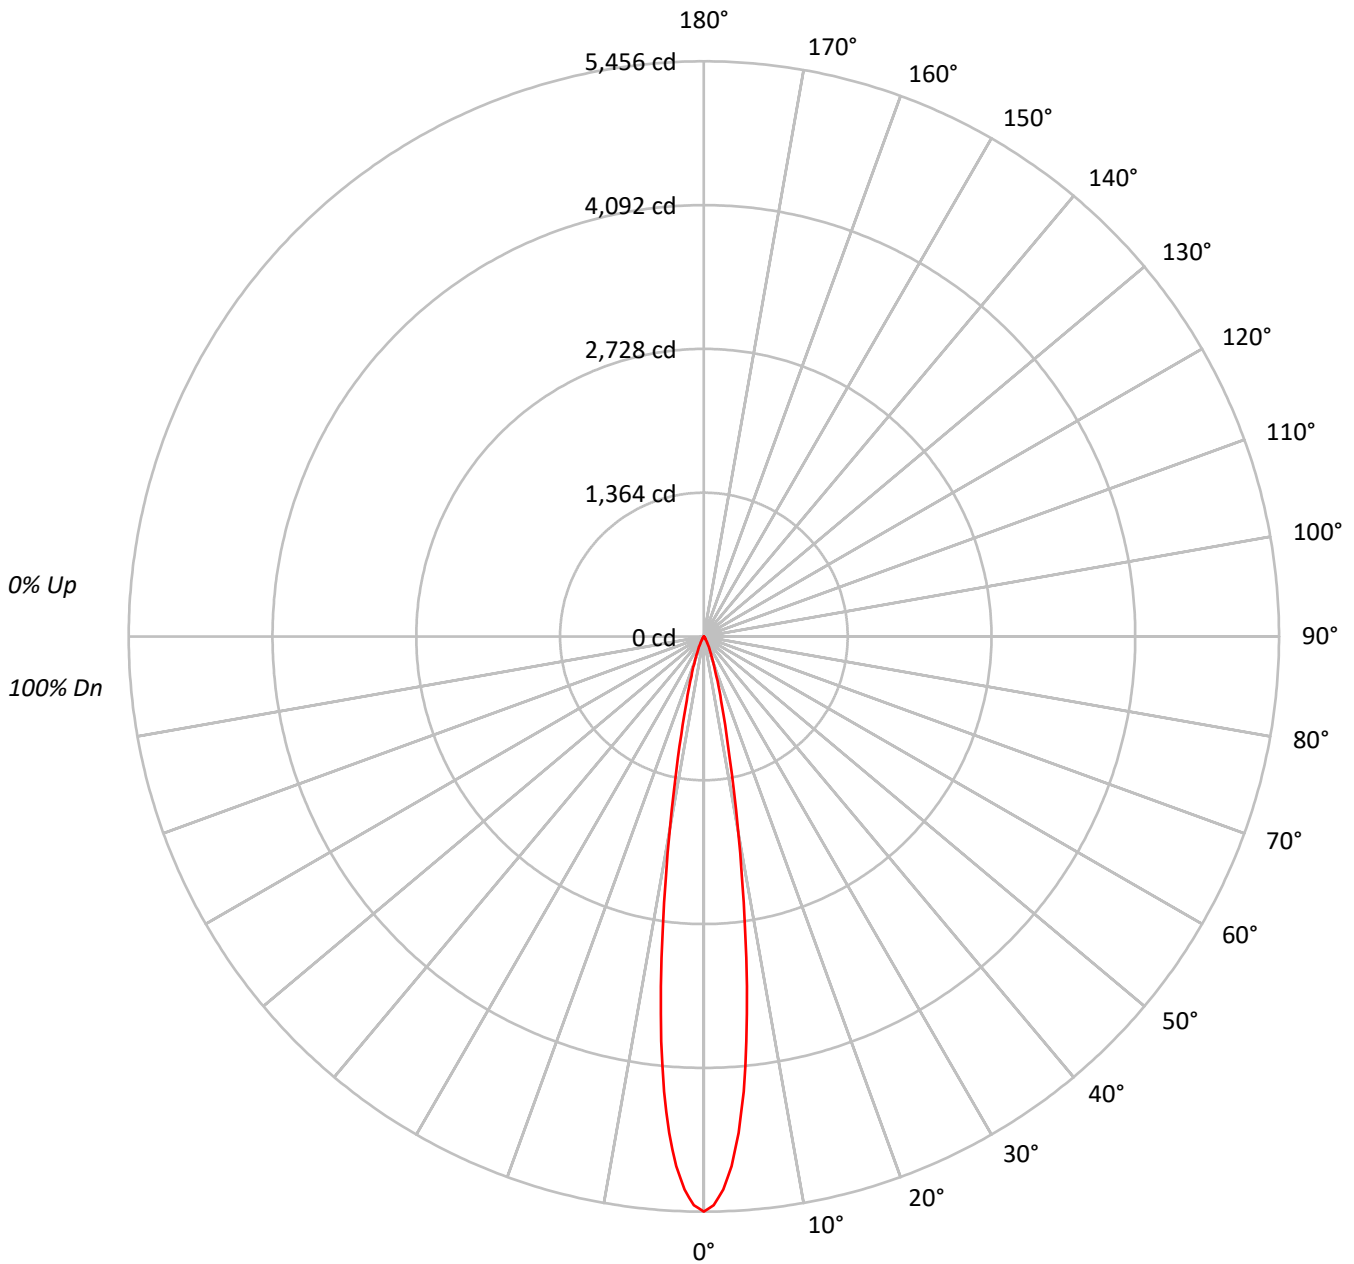



TEST NUMBER: P277962

CATALOG NUMBER: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	116	114	112	110	113	112	110	109	108	106	105	104	103	102	101	100	99	98				98
2	112	109	107	104	110	108	105	103	105	103	101	102	100	99	99	98	97	96				96
3	109	105	102	100	108	104	101	99	102	99	98	100	98	96	97	96	95	93				93
4	107	102	99	96	105	101	98	96	99	97	95	98	95	94	96	94	93	92				92
5	104	99	96	93	103	99	95	93	97	94	92	96	93	91	94	92	91	90				90
6	102	97	93	91	101	96	93	91	95	92	90	94	91	89	93	91	89	88				88
7	100	95	91	89	99	94	91	88	93	90	88	92	90	88	91	89	87	86				86
8	98	93	89	87	97	92	89	87	91	88	86	90	88	86	90	87	86	85				85
9	96	91	87	85	95	90	87	85	90	87	85	89	86	84	88	86	84	83				83
10	94	89	86	83	94	89	85	83	88	85	83	87	85	83	87	85	83	82				82

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2691585
5°	2145902
10°	931609
15°	321885
20°	131991
25°	59608
30°	23984
35°	11142
40°	6054
45°	2233
50°	1382
55°	1032
60°	592
65°	350
70°	433
75°	0
80°	0
85°	0



TEST NUMBER: P277962

CATALOG NUMBER: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	327.5	55.0
10°-20°	196.7	33.0
20°-30°	54.1	9.1
30°-40°	12.9	2.2
40°-50°	3.2	0.5
50°-60°	1.1	0.2
60°-70°	0.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	578.3	97.1
0°-40°	591.1	99.2
0°-60°	595.4	99.9
0°-90°	595.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	595.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5456	
5°	4333	327
15°	630	197
25°	110	54
35°	18	13
45°	3	3
55°	1	1
65°	0	0
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P277962

CATALOG NUMBER: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	5455.6
1°	5395.2
2°	5250.7
3°	5030.2
4°	4719.1
5°	4333.0
6°	3861.4
7°	3344.9
8°	2802.1
9°	2302.9
10°	1859.6
11°	1484.3
12°	1181.5
13°	952.8
14°	770.9
15°	630.2
17.5°	391.2
20°	251.4
22.5°	164.8
25°	109.5
27.5°	70.3
30°	42.1
32.5°	26.5
35°	18.5
37.5°	13.5
40°	9.4
42.5°	5.6
45°	3.2
47.5°	2.4
50°	1.8
52.5°	1.5
55°	1.2
57.5°	0.9
60°	0.6
62.5°	0.6
65°	0.3
67.5°	0.3
70°	0.3
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0



TEST NUMBER: P277962

CATALOG NUMBER: LDA2B05D2WD010 EU2B05SP15D2W 2LBAD1H

CANDELA DISTRIBUTION (continued):

0°
90° | 0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180°







85°		0.0
87.5°		0.0



(END OF REPORT)