

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P283939

Luminaire Tested: **LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P283939
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1809-951-61)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS
Description: PORTFOLIO 2IN ADJ 1000 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in Adj SQ Pinhole w-lens, MMS

Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 781.8 lumens
Efficiency: N/A
Efficacy: 78.2 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.68
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 10
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P283939

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS

Luminous Intensity Polar Plot

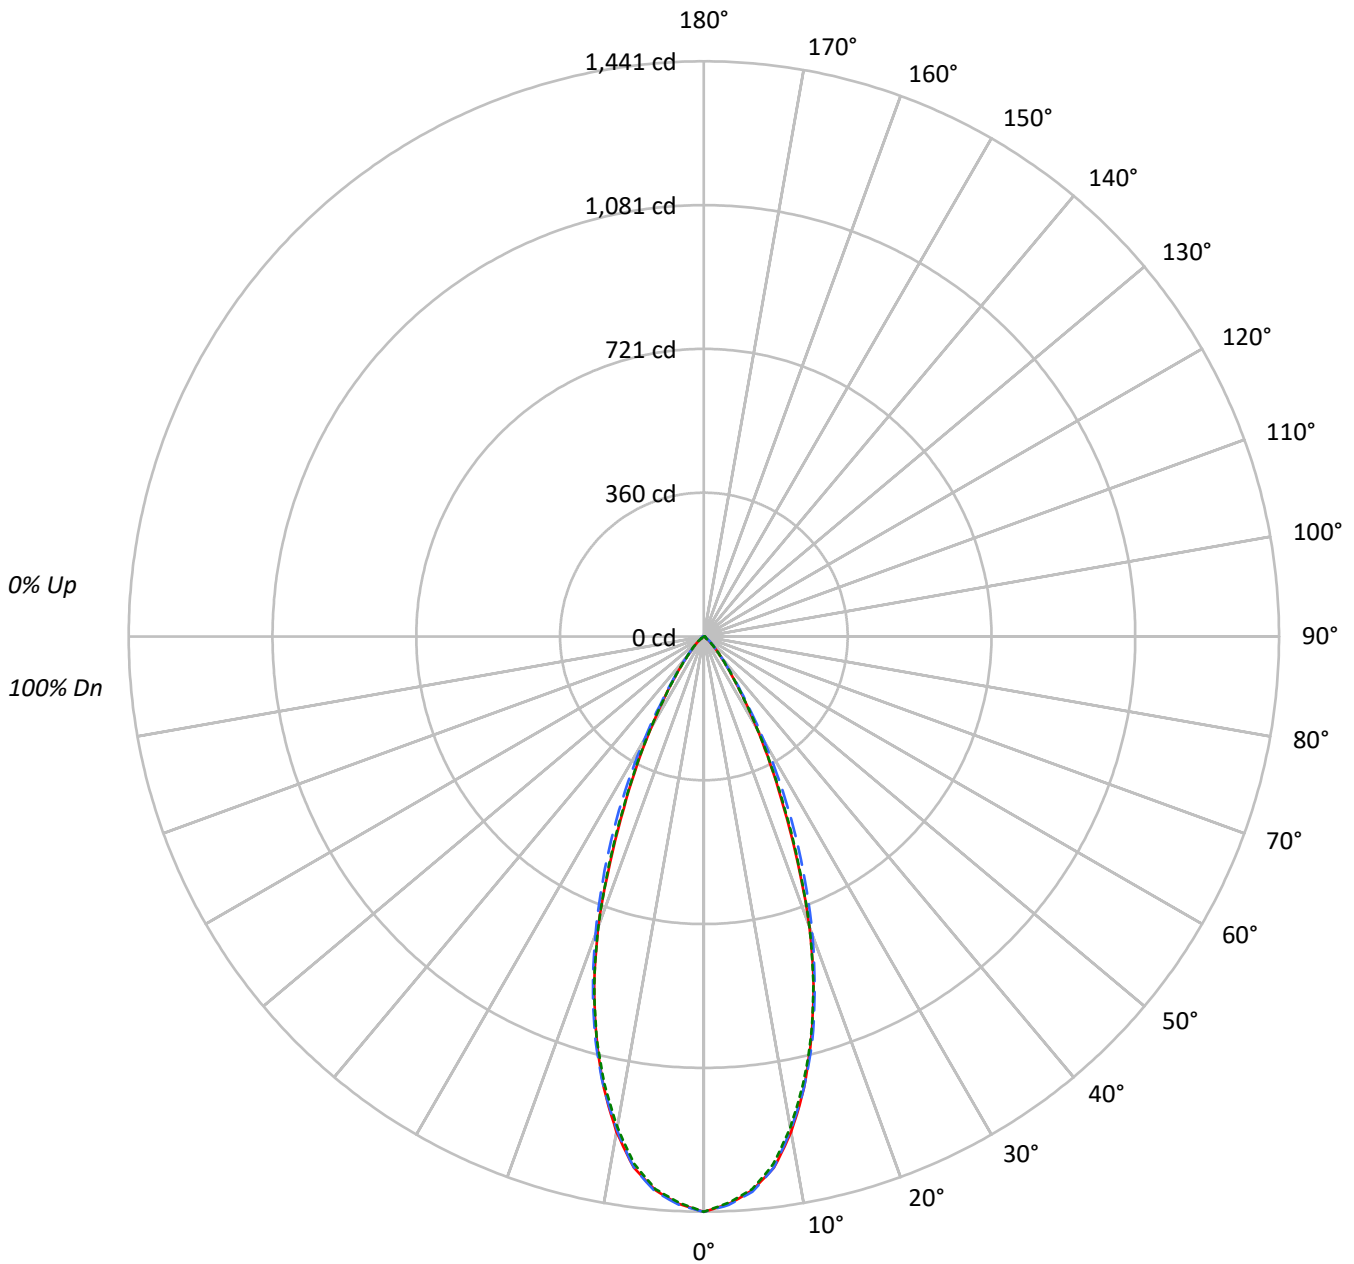



TEST NUMBER: P283939

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89																			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	87	90	87	85	84																			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	81	86	83	81	79																			
5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75																			
6	91	83	78	74	90	82	77	74	81	77	73	80	76	73	78	75	72	71																			
7	87	79	74	70	86	78	73	70	77	73	69	76	72	69	75	71	69	67																			
8	84	75	70	66	83	75	70	66	74	69	66	73	69	66	72	68	65	64																			
9	81	72	67	63	80	71	66	63	71	66	63	70	66	63	69	65	62	61																			
10	77	69	64	60	76	68	63	60	68	63	60	67	63	60	66	62	60	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	711132	711132	711132
5°	689730	691413	688293
10°	631326	628821	625064
15°	531043	535998	530175
20°	406107	416870	405424
25°	257865	290745	262928
30°	149998	169310	152619
35°	79261	84320	79562
40°	41862	43730	41862
45°	23374	24281	23722
50°	10976	13816	10976
55°	3957	7569	4301
60°	4539	4539	4539
65°	4903	5370	4903
70°	6058	5481	6058
75°	5528	5528	5528
80°	5966	4830	5966
85°	4529	4529	4529



TEST NUMBER: P283939

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.7	16.5
10°-20°	286.5	36.6
20°-30°	231.4	29.6
30°-40°	91.4	11.7
40°-50°	28.1	3.6
50°-60°	7.2	0.9
60°-70°	4.4	0.6
70°-80°	3.2	0.4
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	646.5	82.7
0°-40°	737.9	94.4
0°-60°	773.2	98.9
0°-90°	781.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	781.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1441	1441	1441	1441	1441	
5°	1393	1395	1396	1393	1390	129
15°	1040	1043	1049	1045	1038	286
25°	474	496	534	506	483	221
35°	132	135	140	136	132	88
45°	34	34	35	34	34	27
55°	5	6	9	6	5	6
65°	4	5	5	5	4	4
75°	3	3	3	3	3	3
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P283939

CATALOG NUMBER: LDA2B109040D010 EU2B10WFL559040 2LBALPINSQ1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1441.4	1441.4	1441.4	1441.4	1441.4
2.5°	1423.3	1424.2	1425.4	1423.7	1419.6
5°	1392.7	1395.2	1396.1	1393.1	1389.8
7.5°	1342.4	1339.5	1342.0	1337.0	1332.8
10°	1260.2	1256.5	1255.2	1247.7	1247.7
12.5°	1158.8	1157.5	1158.4	1154.6	1148.7
15°	1039.7	1042.7	1049.4	1045.2	1038.0
17.5°	913.5	917.7	923.6	922.3	912.7
20°	773.5	785.7	794.0	786.1	772.2
22.5°	614.2	640.2	661.6	644.8	622.2
25°	473.7	496.4	534.1	505.6	483.0
27.5°	359.3	375.6	410.0	381.9	366.4
30°	263.3	273.3	297.2	278.8	267.9
32.5°	188.2	195.4	205.4	194.5	189.1
35°	131.6	135.4	140.0	135.8	132.1
37.5°	92.7	93.9	97.3	93.9	92.2
40°	65.0	65.4	67.9	65.8	65.0
42.5°	47.0	47.0	48.2	47.4	47.0
45°	33.5	34.0	34.8	34.4	34.0
47.5°	23.9	24.7	24.7	25.2	23.5
50°	14.3	17.6	18.0	17.6	14.3
52.5°	7.5	10.5	13.0	10.5	7.5
55°	4.6	6.3	8.8	6.3	5.0
57.5°	4.6	4.6	5.9	5.0	4.6
60°	4.6	4.6	4.6	4.6	4.6
62.5°	4.6	4.6	4.6	4.6	4.6
65°	4.2	4.6	4.6	4.6	4.2
67.5°	4.2	4.2	4.2	4.2	4.2
70°	4.2	4.2	3.8	4.2	4.2
72.5°	3.8	3.8	3.4	3.8	3.8
75°	2.9	2.9	2.9	2.9	2.9
77.5°	2.5	2.5	2.5	2.5	2.5
80°	2.1	2.1	1.7	2.1	2.1
82.5°	1.3	1.3	1.3	1.3	1.3
85°	0.8	0.8	0.8	0.8	0.8
87.5°	0.4	0.4	0.4	0.4	0.4
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)