

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P284011

Luminaire Tested: **LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P284011
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1809-951-61)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS
Description: PORTFOLIO 2IN ADJ 1500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND
2in Adj SQ Pinhole w-lens, MMS

Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 981.2 lumens
Efficiency: N/A
Efficacy: 69.6 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.68
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P284011

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS

Luminous Intensity Polar Plot

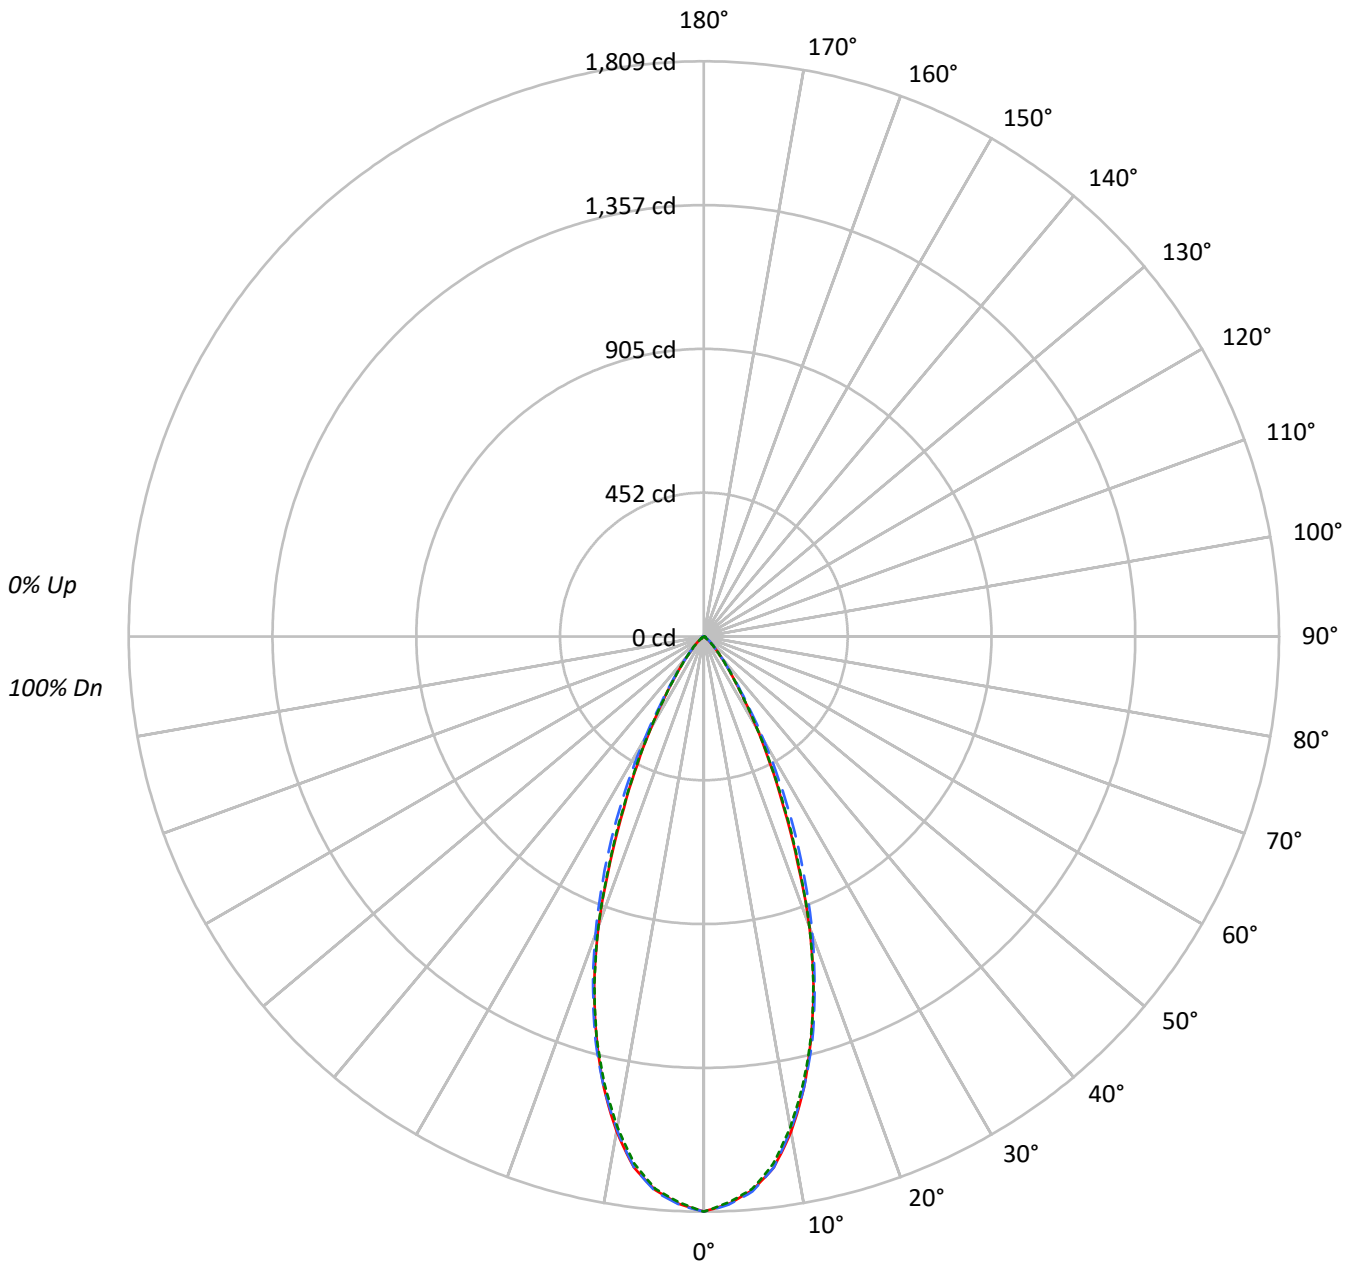



TEST NUMBER: P284011

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89																			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	87	90	87	85	84																			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	81	86	83	81	79																			
5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75																			
6	91	83	78	74	90	82	77	74	81	77	73	80	76	73	78	75	72	71																			
7	87	79	74	70	86	78	73	70	77	73	69	76	72	69	75	71	69	67																			
8	84	75	70	66	83	75	70	66	74	69	66	73	69	66	72	68	65	64																			
9	81	72	67	63	80	71	66	63	71	66	63	70	66	63	69	65	62	61																			
10	77	69	64	60	76	68	63	60	68	63	60	67	63	60	66	62	60	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	892442	892442	892442
5°	865641	867721	863809
10°	792338	789182	784423
15°	666447	672627	665374
20°	509641	523187	508854
25°	323625	364888	329939
30°	188224	212493	191528
35°	99497	105821	99798
40°	52554	54872	52554
45°	29374	30490	29723
50°	13739	17346	13739
55°	4989	9462	5419
60°	5723	5723	5723
65°	6187	6771	6187
70°	7645	6780	7645
75°	7053	7053	7053
80°	7387	5966	7387
85°	6227	6227	6227



TEST NUMBER: P284011

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.5	16.5
10°-20°	359.5	36.6
20°-30°	290.3	29.6
30°-40°	114.8	11.7
40°-50°	35.2	3.6
50°-60°	9.1	0.9
60°-70°	5.5	0.6
70°-80°	4.0	0.4
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	811.3	82.7
0°-40°	926.1	94.4
0°-60°	970.4	98.9
0°-90°	981.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	981.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1809	1809	1809	1809	1809	
5°	1748	1751	1752	1748	1744	162
15°	1305	1308	1317	1312	1303	358
25°	594	623	670	634	606	277
35°	165	170	176	170	166	111
45°	42	43	44	43	43	34
55°	6	8	11	8	6	7
65°	5	6	6	6	5	5
75°	4	4	4	4	4	4
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P284011

CATALOG NUMBER: LDA2B159030D010 EU2B15WFL559030 2LBALPINSQ1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1808.9	1808.9	1808.9	1808.9	1808.9
2.5°	1786.3	1787.3	1788.9	1786.8	1781.5
5°	1747.9	1751.0	1752.1	1748.4	1744.2
7.5°	1684.7	1681.0	1684.2	1677.9	1672.6
10°	1581.6	1576.9	1575.3	1565.8	1565.8
12.5°	1454.3	1452.7	1453.7	1449.0	1441.6
15°	1304.8	1308.5	1316.9	1311.7	1302.7
17.5°	1146.5	1151.7	1159.1	1157.5	1145.4
20°	970.7	986.0	996.5	986.5	969.2
22.5°	770.8	803.4	830.3	809.2	780.8
25°	594.5	623.0	670.3	634.5	606.1
27.5°	450.9	471.4	514.6	479.3	459.9
30°	330.4	343.0	373.0	349.9	336.2
32.5°	236.2	245.2	257.8	244.1	237.3
35°	165.2	169.9	175.7	170.5	165.7
37.5°	116.3	117.9	122.1	117.9	115.8
40°	81.6	82.1	85.2	82.6	81.6
42.5°	58.9	58.9	60.5	59.5	58.9
45°	42.1	42.6	43.7	43.1	42.6
47.5°	30.0	31.0	31.0	31.6	29.5
50°	17.9	22.1	22.6	22.1	17.9
52.5°	9.5	13.2	16.3	13.2	9.5
55°	5.8	7.9	11.0	7.9	6.3
57.5°	5.8	5.8	7.4	6.3	5.8
60°	5.8	5.8	5.8	5.8	5.8
62.5°	5.8	5.8	5.8	5.8	5.8
65°	5.3	5.8	5.8	5.8	5.3
67.5°	5.3	5.3	5.3	5.3	5.3
70°	5.3	5.3	4.7	5.3	5.3
72.5°	4.7	4.7	4.2	4.7	4.7
75°	3.7	3.7	3.7	3.7	3.7
77.5°	3.2	3.2	3.2	3.2	3.2
80°	2.6	2.6	2.1	2.6	2.6
82.5°	1.6	1.6	1.6	1.6	1.6
85°	1.1	1.1	1.1	1.1	1.1
87.5°	0.5	0.5	0.5	0.5	0.5
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)