

Scaled data based on original data using

LM-41-14 Approved Method for Photometric Testing Of Indoor Fluorescent Luminaires

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: io LED

Report Number: P284044

Luminaire Tested: **LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS**

Issue Date: 3/3/2020

Test Information

Test Method: LM-41-14
Report Number: P284044
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G2-1809-951-61)
Test Lab: INNOVATION CENTER(G2)
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: io LED
Catalog Number: LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS
Description: PORTFOLIO 2IN ADJ 1500 LUMEN LED LUMINAIRE WITH WIDE FLOOD OPTIC AND 2in Adj SQ PinHole, MMS

Light Source: -
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 982.4 lumens
Efficiency: N/A
Efficacy: 69.7 lumens/watt
Spacing Criteria (0/90/45): 0.68 / 0.68 / 0.68
Luminous Opening: Circular (Dia: 0.17' x H: 0')
CIE Type: Direct


Input Watts (W): 14.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P284044

CATALOG NUMBER: LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS

Luminous Intensity Polar Plot

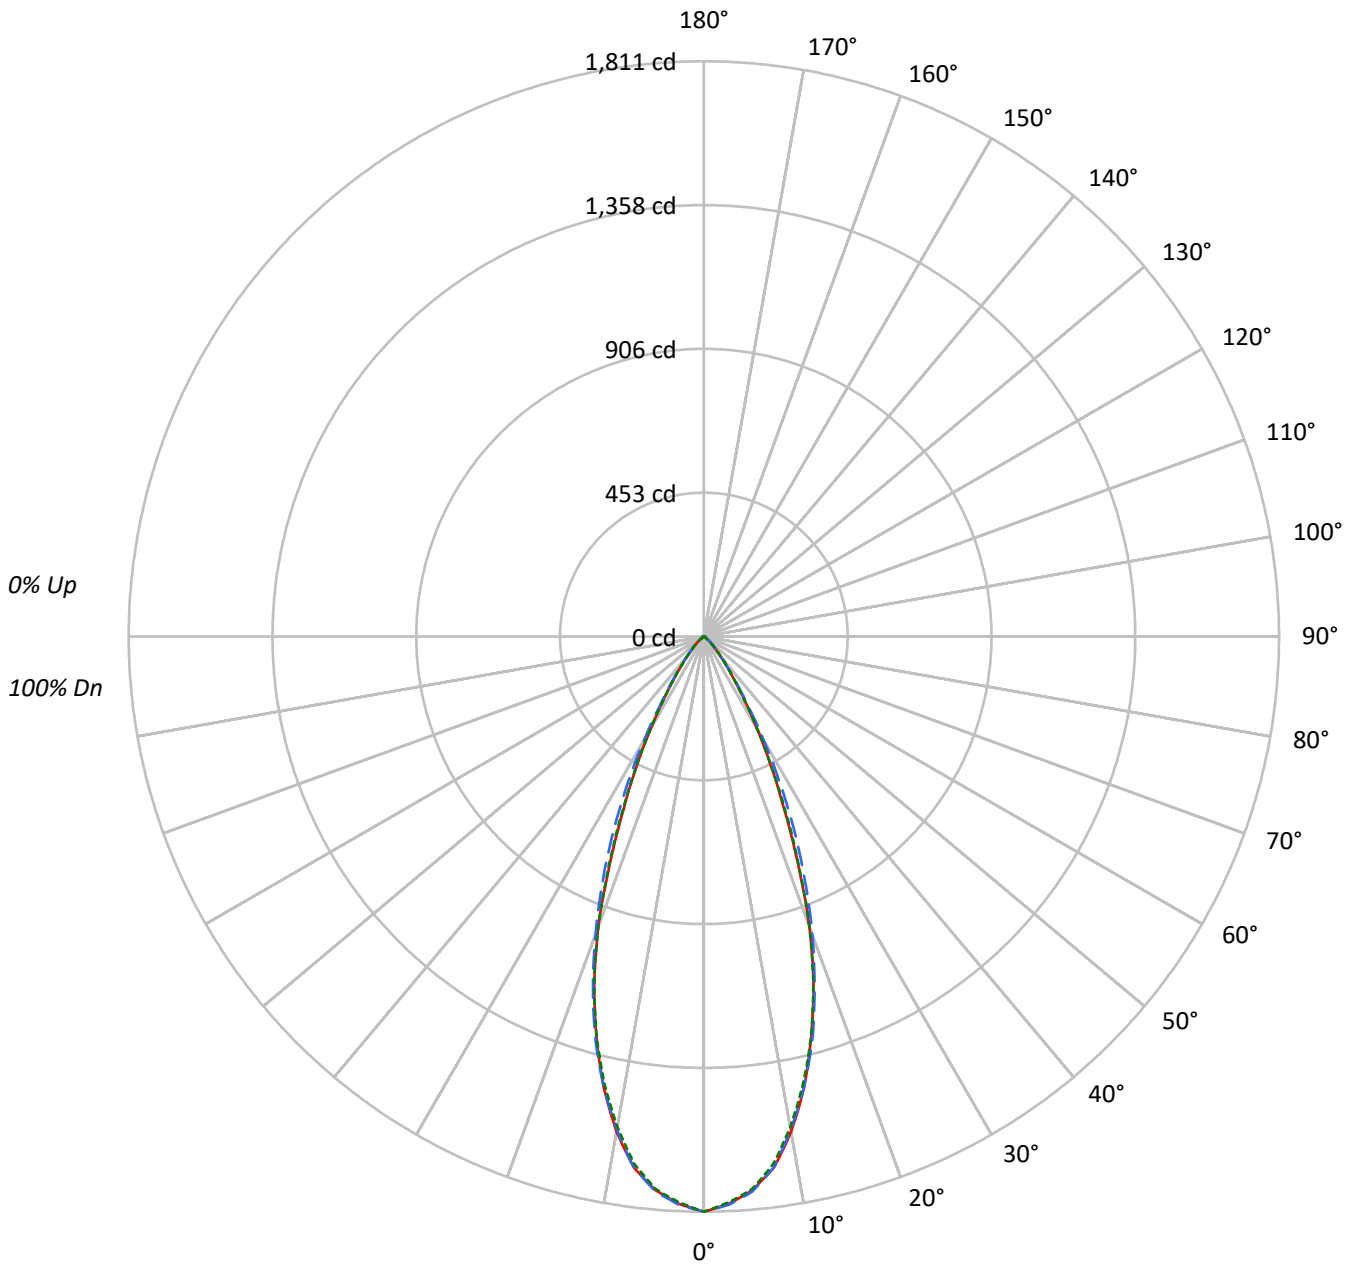



TEST NUMBER: P284044

CATALOG NUMBER: LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94																			
2	109	104	101	98	107	103	99	96	100	97	94	97	94	92	94	92	90	89																			
3	104	98	94	90	102	97	93	89	94	91	88	92	89	87	90	87	85	84																			
4	100	93	88	84	98	92	87	83	90	86	82	88	84	81	86	83	81	79																			
5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75																			
6	91	83	78	74	90	82	77	74	81	77	73	80	76	73	78	75	72	71																			
7	87	79	74	70	86	78	73	70	77	73	69	76	72	69	75	71	69	67																			
8	84	75	70	66	83	75	70	66	74	69	66	73	69	66	72	68	65	64																			
9	81	72	67	63	80	71	66	63	71	66	63	70	66	63	69	65	62	61																			
10	77	69	64	60	76	68	63	60	68	63	60	67	63	60	66	62	60	58																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	893528	893528	893528
5°	866681	868761	864849
10°	793290	790134	785375
15°	667315	673496	666192
20°	510271	523870	509484
25°	324060	365323	330375
30°	188452	212777	191756
35°	99618	105942	99919
40°	52618	54936	52618
45°	29374	30490	29793
50°	13739	17423	13739
55°	4989	9548	5419
60°	5723	5723	5723
65°	6187	6771	6187
70°	7645	6780	7645
75°	7053	7053	7053
80°	7387	5966	7387
85°	6227	6227	6227



TEST NUMBER: P284044

CATALOG NUMBER: LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	161.7	16.5
10°-20°	360.0	36.6
20°-30°	290.7	29.6
30°-40°	114.9	11.7
40°-50°	35.3	3.6
50°-60°	9.1	0.9
60°-70°	5.5	0.6
70°-80°	4.0	0.4
80°-90°	1.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	812.3	82.7
0°-40°	927.2	94.4
0°-60°	971.6	98.9
0°-90°	982.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	982.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1811	1811	1811	1811	1811	
5°	1750	1753	1754	1750	1746	162
15°	1306	1310	1319	1313	1304	359
25°	595	624	671	635	607	277
35°	165	170	176	171	166	111
45°	42	43	44	43	43	34
55°	6	8	11	8	6	7
65°	5	6	6	6	5	5
75°	4	4	4	4	4	4
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P284044

CATALOG NUMBER: LDA2B15D2WD010 EU2B15WFL55D2W 2LBAPINSQ1MMS

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1811.1	1811.1	1811.1	1811.1	1811.1
2.5°	1788.5	1789.5	1791.1	1789.0	1783.7
5°	1750.0	1753.2	1754.2	1750.5	1746.3
7.5°	1686.8	1683.1	1686.3	1680.0	1674.7
10°	1583.5	1578.8	1577.2	1567.7	1567.7
12.5°	1456.1	1454.5	1455.5	1450.8	1443.4
15°	1306.5	1310.1	1318.6	1313.3	1304.3
17.5°	1147.9	1153.2	1160.5	1159.0	1146.8
20°	971.9	987.2	997.8	987.7	970.4
22.5°	771.8	804.4	831.3	810.2	781.8
25°	595.3	623.7	671.1	635.3	606.9
27.5°	451.5	472.0	515.2	479.9	460.4
30°	330.8	343.5	373.5	350.3	336.6
32.5°	236.5	245.5	258.1	244.4	237.6
35°	165.4	170.2	175.9	170.7	165.9
37.5°	116.4	118.0	122.2	118.0	115.9
40°	81.7	82.2	85.3	82.7	81.7
42.5°	59.0	59.0	60.6	59.5	59.0
45°	42.1	42.7	43.7	43.2	42.7
47.5°	30.0	31.1	31.1	31.6	29.5
50°	17.9	22.1	22.7	22.1	17.9
52.5°	9.5	13.2	16.3	13.2	9.5
55°	5.8	7.9	11.1	7.9	6.3
57.5°	5.8	5.8	7.4	6.3	5.8
60°	5.8	5.8	5.8	5.8	5.8
62.5°	5.8	5.8	5.8	5.8	5.8
65°	5.3	5.8	5.8	5.8	5.3
67.5°	5.3	5.3	5.3	5.3	5.3
70°	5.3	5.3	4.7	5.3	5.3
72.5°	4.7	4.7	4.2	4.7	4.7
75°	3.7	3.7	3.7	3.7	3.7
77.5°	3.2	3.2	3.2	3.2	3.2
80°	2.6	2.6	2.1	2.6	2.6
82.5°	1.6	1.6	1.6	1.6	1.6
85°	1.1	1.1	1.1	1.1	1.1
87.5°	0.5	0.5	0.5	0.5	0.5
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By E9808895 / USPTCWHP6082093





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)