

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742178

Luminaire Tested: LD4D10D010-EU4DR350210IC9024-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P742178
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-20)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR350210IC9024-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 35° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 720.8 lumens
Efficiency: N/A
Efficacy: 61.6 lumens/watt
Spacing Criteria (0/90/45): 0.6 / 0.6 / 0.54
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742178

CATALOG NUMBER: LD4D10D010-EU4DR350210IC9024-4LBDP1B

Luminous Intensity Polar Plot

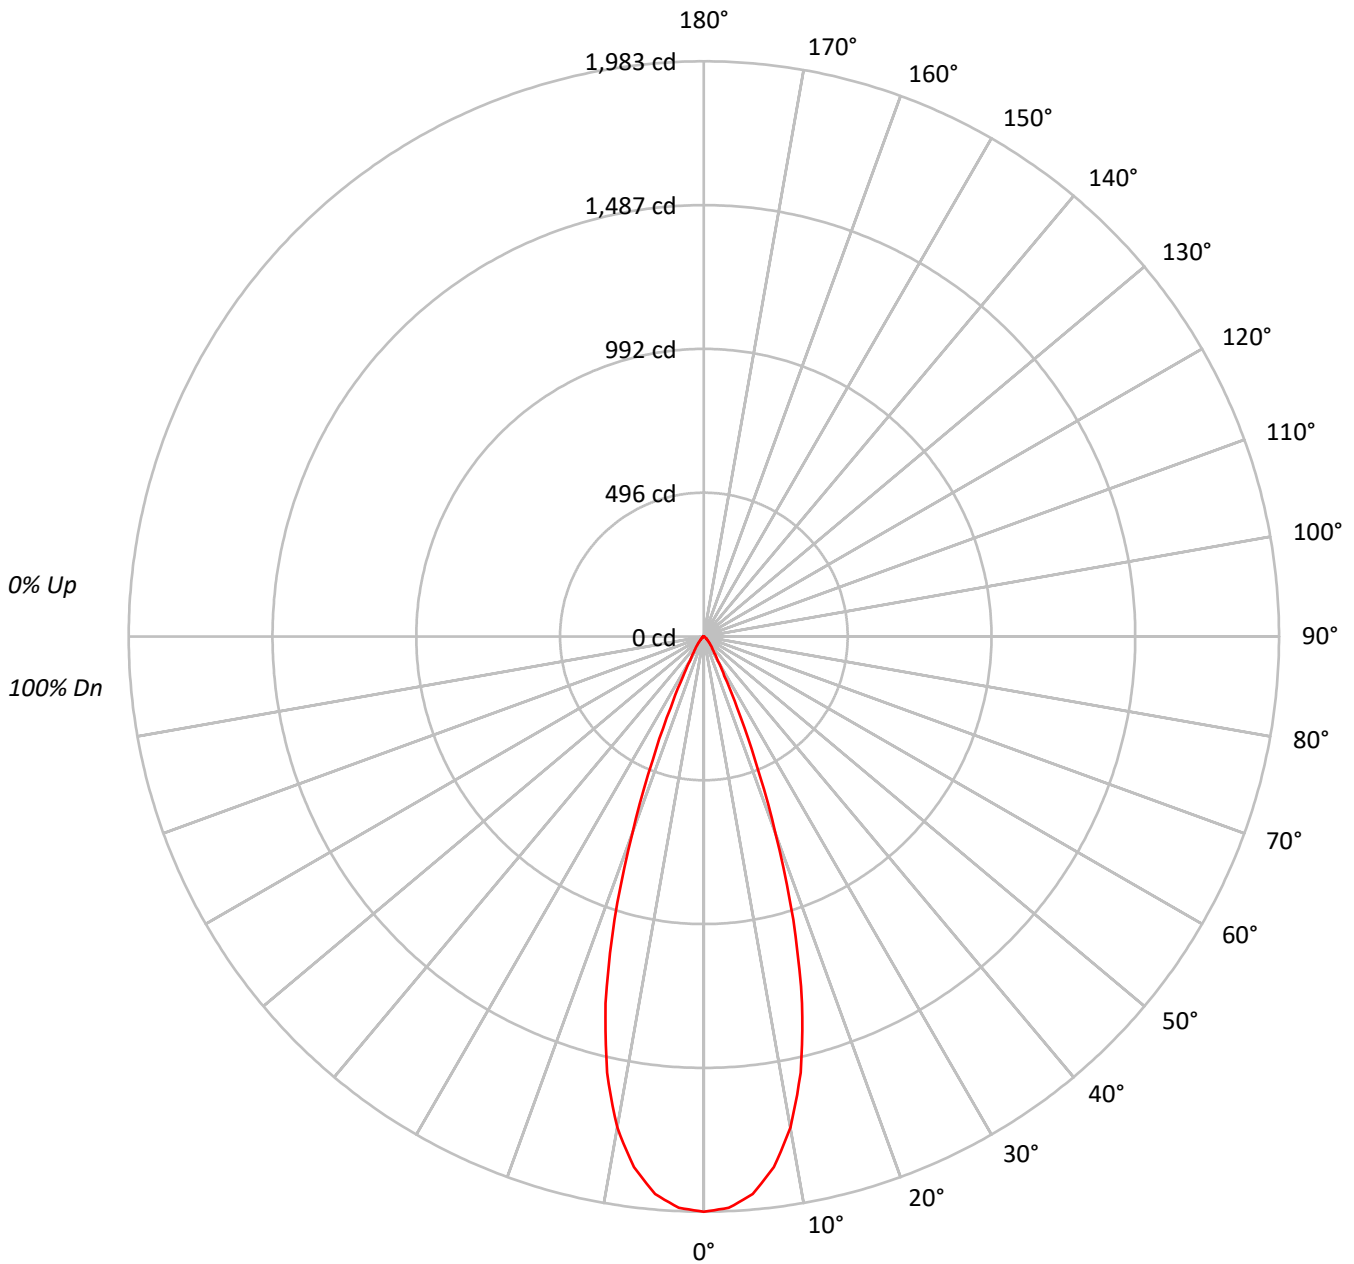



TEST NUMBER: P742178

CATALOG NUMBER: LD4D10D010-EU4DR350210IC9024-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	112	110	108	112	110	108	107	106	105	103	103	101	100	99	98	98	96						96													
2	110	106	103	101	108	105	102	99	102	99	97	99	97	95	96	95	93	92						92													
3	106	101	97	94	105	100	96	94	97	95	92	95	93	91	93	91	89	88						88													
4	103	97	92	89	101	96	92	89	94	90	88	92	89	87	90	88	86	84						84													
5	99	93	88	85	98	92	87	84	90	86	84	89	85	83	87	84	82	81						81													
6	96	89	84	81	94	88	84	81	87	83	80	85	82	80	84	81	79	78						78													
7	93	85	81	78	91	85	80	77	84	80	77	83	79	77	82	79	76	75						75													
8	90	82	78	74	88	82	77	74	81	77	74	80	76	74	79	76	73	72						72													
9	87	79	75	72	86	79	75	72	78	74	71	77	74	71	77	73	71	70						70													
10	84	77	72	69	83	76	72	69	76	72	69	75	71	69	74	71	69	68						68													

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	216708
5°	211613
10°	190717
15°	148034
20°	83961
25°	32659
30°	12187
35°	6682
40°	4364
45°	2658
50°	1700
55°	1181
60°	874
65°	465
70°	32
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2658 cd/sqm



TEST NUMBER: P742178

CATALOG NUMBER: LD4D10D010-EU4DR350210IC9024-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	177.4	24.6
10°-20°	346.5	48.1
20°-30°	141.3	19.6
30°-40°	33.8	4.7
40°-50°	14.1	2.0
50°-60°	5.8	0.8
60°-70°	1.8	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.2	92.3
0°-40°	699.0	97.0
0°-60°	718.9	99.7
0°-90°	720.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	720.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1983	
5°	1929	177
15°	1309	346
25°	271	141
35°	50	34
45°	17	14
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P742178

CATALOG NUMBER: LD4D10D010-EU4DR350210IC9024-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1983.4
2.5°	1971.5
5°	1929.4
7.5°	1845.5
10°	1719.0
12.5°	1541.0
15°	1308.7
17.5°	1024.5
20°	722.1
22.5°	460.4
25°	270.9
27.5°	153.1
30°	96.6
32.5°	67.8
35°	50.1
37.5°	38.7
40°	30.6
42.5°	23.6
45°	17.2
47.5°	12.9
50°	10.0
52.5°	7.9
55°	6.2
57.5°	5.1
60°	4.0
62.5°	2.9
65°	1.8
67.5°	0.6
70°	0.1
72.5°	0.1
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.1
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)