

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P741884

Luminaire Tested: LD4D10D010-EU4DR150210IC9027-4LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P741884  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D10D010-EU4DR150210IC9027-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1029.0 lumens  
Efficiency: N/A  
Efficacy: 87.9 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P741884  
CATALOG NUMBER: LD4D10D010-EU4DR150210IC9027-4LBS1H

### Luminous Intensity Polar Plot

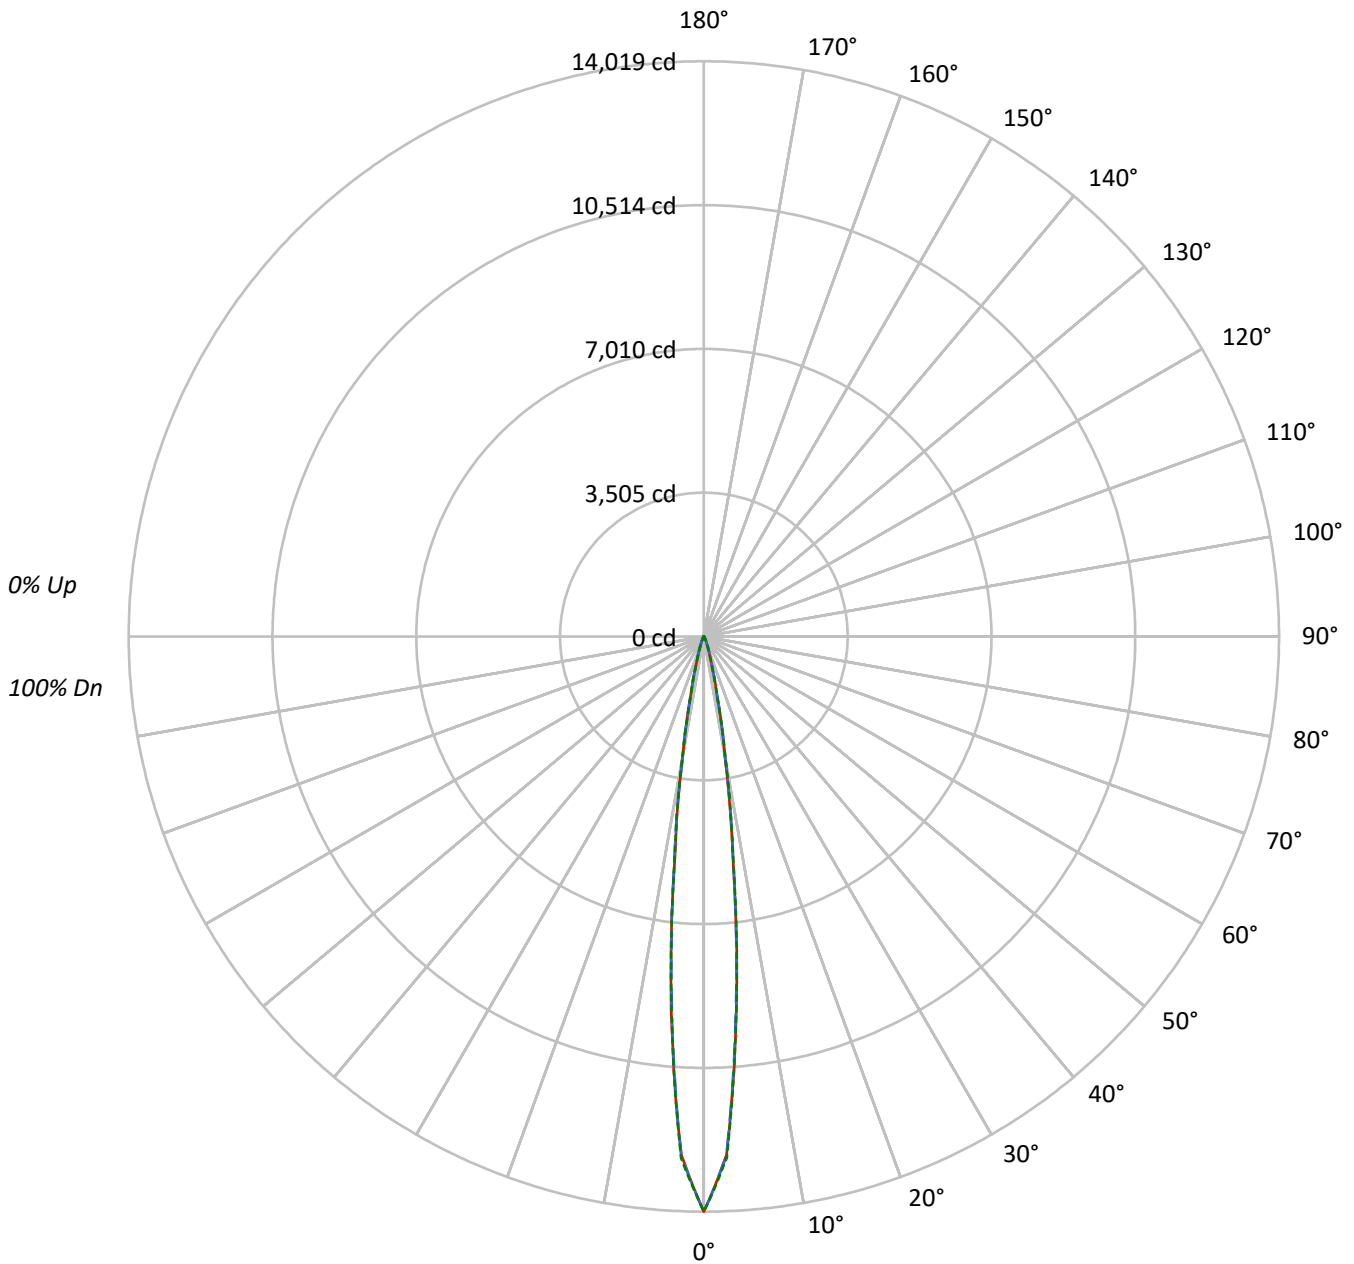



TEST NUMBER: P741884

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9027-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	87	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1577406	1577406	1577406
5°	926957	914955	922191
10°	276657	278588	282853
15°	68817	70154	67992
20°	20587	23843	21028
25°	7260	9247	7354
30°	2666	3512	2711
35°	1336	1510	1293
40°	845	930	845
45°	623	665	623
50°	494	494	494
55°	411	411	411
60°	330	330	330
65°	257	257	257
70°	219	219	219
75°	136	136	181
80°	95	95	95
85°	50	50	50

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 665 cd/sqm



TEST NUMBER: P741884

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9027-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	667.3	64.9
10°-20°	274.5	26.7
20°-30°	54.5	5.3
30°-40°	13.6	1.3
40°-50°	7.2	0.7
50°-60°	5.3	0.5
60°-70°	3.8	0.4
70°-80°	2.2	0.2
80°-90°	0.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
<hr/>		
0°-30°	996.3	96.8
0°-40°	1009.9	98.2
0°-60°	1022.4	99.4
0°-90°	1029.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1029.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	14019	14019	14019	14019	14019	
5°	9121	9027	9003	9065	9074	666
15°	792	807	808	794	783	272
25°	93	106	119	105	94	49
35°	18	20	21	20	18	12
45°	9	9	10	9	9	7
55°	6	6	6	6	6	5
65°	4	4	4	4	4	4
75°	2	2	2	2	2	2
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P741884

CATALOG NUMBER: LD4D10D010-EU4DR150210IC9027-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	14018.9	14018.9	14018.9	14018.9	14018.9
2.5°	12645.6	12656.3	12660.5	12672.9	12719.2
5°	9121.0	9027.3	9002.9	9065.2	9074.1
7.5°	5402.9	5421.9	5491.4	5506.8	5451.0
10°	2965.0	2989.3	2985.7	3007.1	3031.4
12.5°	1516.3	1497.3	1491.4	1515.7	1481.9
15°	792.3	807.1	807.7	793.5	782.8
17.5°	426.1	443.3	471.8	448.7	413.1
20°	251.6	267.1	291.4	272.4	257.0
22.5°	155.5	168.0	185.2	170.3	157.9
25°	93.2	105.6	118.7	105.0	94.4
27.5°	55.2	65.9	74.2	65.3	54.6
30°	35.6	41.5	46.9	40.9	36.2
32.5°	24.9	27.3	29.7	27.3	24.9
35°	18.4	19.6	20.8	19.6	17.8
37.5°	14.2	15.4	16.0	14.8	13.6
40°	11.9	12.5	13.1	12.5	11.9
42.5°	10.1	10.7	10.7	10.7	10.1
45°	8.9	8.9	9.5	8.9	8.9
47.5°	7.7	7.7	8.3	7.7	7.7
50°	7.1	7.1	7.1	7.1	7.1
52.5°	6.5	6.5	6.5	6.5	6.5
55°	5.9	5.9	5.9	5.9	5.9
57.5°	5.3	5.3	5.3	5.3	5.3
60°	4.7	4.7	4.7	4.7	4.7
62.5°	4.2	4.2	4.2	4.2	4.2
65°	3.6	3.6	3.6	3.6	3.6
67.5°	3.6	3.6	3.6	3.6	3.6
70°	3.0	3.0	3.0	3.0	3.0
72.5°	2.4	2.4	2.4	2.4	2.4
75°	1.8	1.8	1.8	1.8	2.4
77.5°	1.8	1.8	1.8	1.8	1.8
80°	1.2	1.2	1.2	1.2	1.2
82.5°	1.2	1.2	1.2	1.2	1.2
85°	0.6	0.6	0.6	0.6	0.6
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)