

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742114

Luminaire Tested: LD4D10D010-EU4DR300210IC9027-4LBDP1H

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P742114  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D10D010-EU4DR300210IC9027-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 945.2 lumens  
Efficiency: N/A  
Efficacy: 80.8 lumens/watt  
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49  
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P742114

CATALOG NUMBER: LD4D10D010-EU4DR300210IC9027-4LBDP1H

### Luminous Intensity Polar Plot

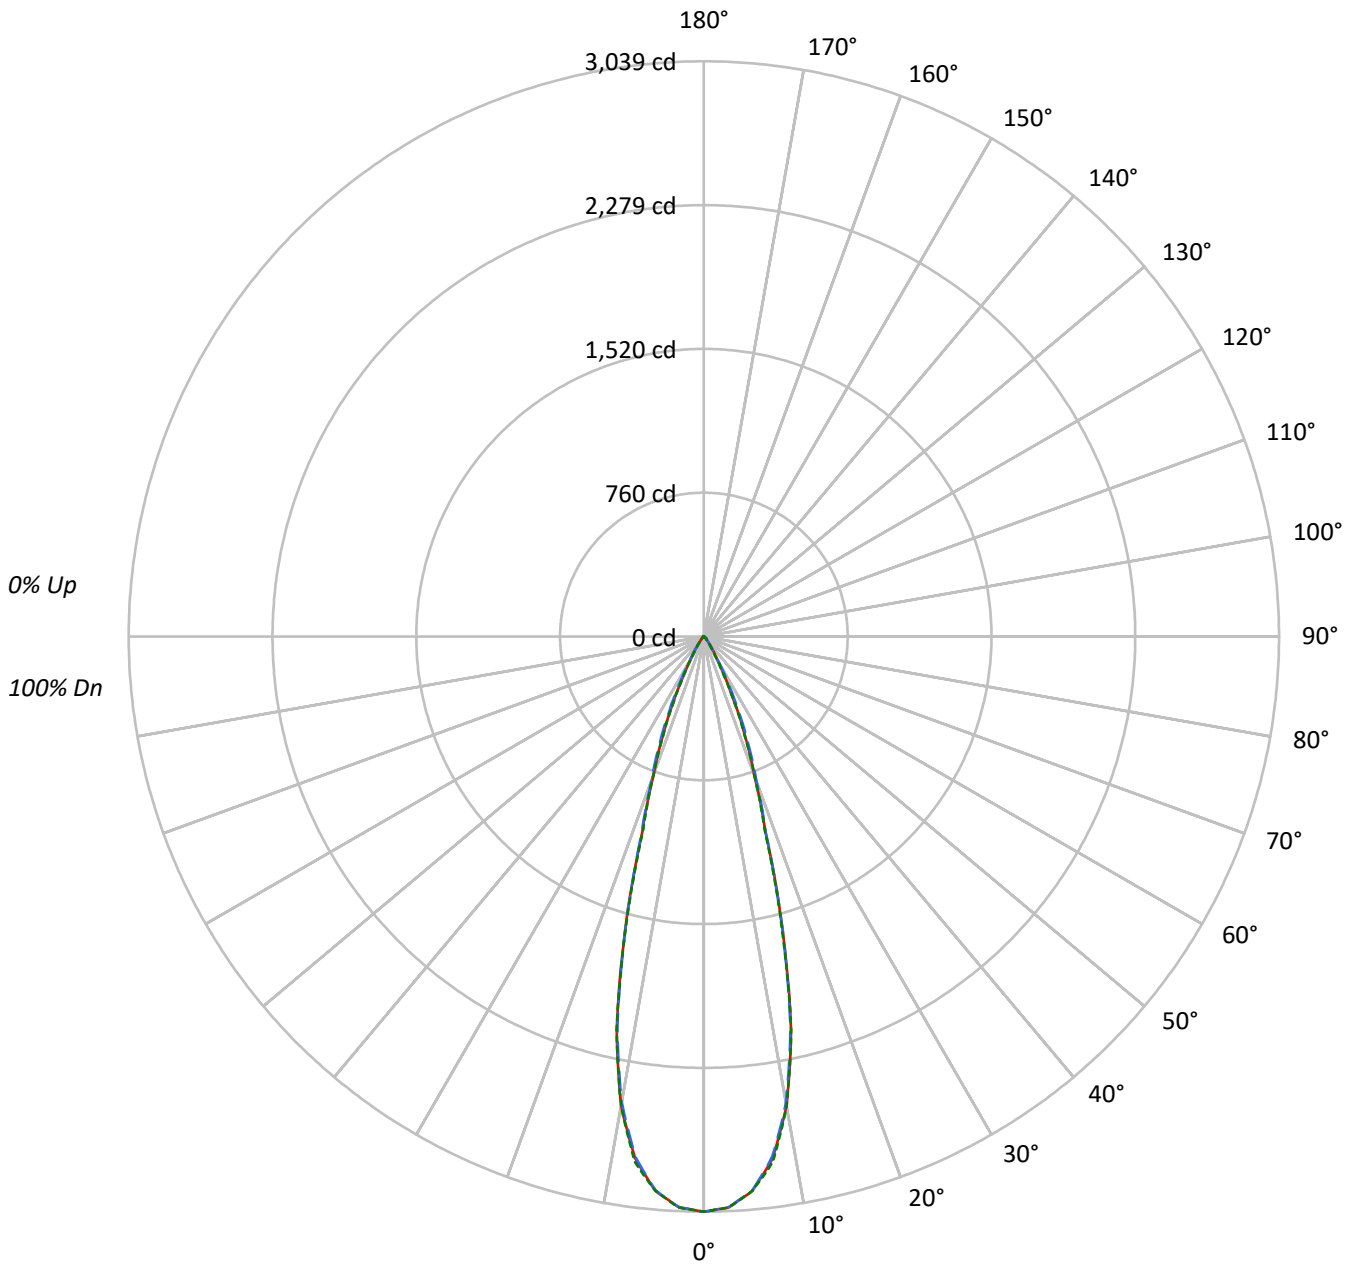



TEST NUMBER: P742114

CATALOG NUMBER: LD4D10D010-EU4DR300210IC9027-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	232615	232615	232615
5°	225943	225682	225951
10°	195702	194318	195655
15°	127685	127004	126362
20°	63487	65873	63405
25°	31984	36063	31325
30°	12807	13947	11154
35°	5934	5691	4766
40°	2568	2848	2418
45°	1808	2241	1819
50°	619	1643	655
55°	360	681	374
60°	260	291	260
65°	163	163	163
70°	112	67	112
75°	0	59	0
80°	0	0	0
85°	0	0	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 22.5°  
 Vertical Angle: 45°  
 Luminance: 2241 cd/sqm



TEST NUMBER: P742114

CATALOG NUMBER: LD4D10D010-EU4DR300210IC9027-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	267.2	28.3
10°-20°	430.4	45.5
20°-30°	186.0	19.7
30°-40°	42.4	4.5
40°-50°	14.6	1.5
50°-60°	3.6	0.4
60°-70°	0.9	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	883.6	93.5
0°-40°	926.0	98.0
0°-60°	944.1	99.9
0°-90°	945.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	945.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	3039	3039	3039	3039	3039	
5°	2941	2938	2937	2943	2941	267
15°	1611	1592	1603	1597	1595	431
25°	379	393	427	383	371	181
35°	64	65	61	60	51	43
45°	17	21	21	21	17	12
55°	3	3	5	3	3	3
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P742114

CATALOG NUMBER: LD4D10D010-EU4DR300210IC9027-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	3039.0	3039.0	3039.0	3039.0	3039.0
2.5°	3018.9	3016.8	3018.0	3019.5	3020.1
5°	2940.6	2937.7	2937.2	2943.3	2940.7
7.5°	2782.6	2778.5	2772.5	2786.3	2799.3
10°	2517.9	2513.4	2500.1	2506.7	2517.3
12.5°	2127.1	2112.6	2112.4	2133.2	2130.4
15°	1611.3	1591.9	1602.7	1597.4	1594.6
17.5°	1083.6	1076.1	1090.4	1086.1	1067.4
20°	779.4	781.4	808.7	795.0	778.4
22.5°	568.8	575.8	608.2	572.8	559.8
25°	378.7	393.0	427.0	383.0	370.9
27.5°	232.9	239.5	273.9	229.9	223.3
30°	144.9	141.6	157.8	135.5	126.2
32.5°	95.1	90.9	96.1	86.2	78.8
35°	63.5	64.9	60.9	60.4	51.0
37.5°	39.7	45.7	40.3	43.0	32.8
40°	25.7	33.1	28.5	31.5	24.2
42.5°	21.0	25.5	23.4	24.9	21.5
45°	16.7	20.7	20.7	20.7	16.8
47.5°	9.2	13.9	17.8	14.2	9.9
50°	5.2	7.0	13.8	7.3	5.5
52.5°	3.6	4.0	9.4	4.2	3.7
55°	2.7	2.8	5.1	3.0	2.8
57.5°	2.1	2.2	2.7	2.2	2.1
60°	1.7	1.7	1.9	1.8	1.7
62.5°	1.2	1.2	1.3	1.2	1.2
65°	0.9	0.9	0.9	0.9	0.9
67.5°	0.5	0.6	0.6	0.6	0.6
70°	0.5	0.3	0.3	0.3	0.5
72.5°	0.3	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)