

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742583

Luminaire Tested: LD4D10D010-EU4DR600210IC9027-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P742583
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR600210IC9027-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1019.1 lumens
Efficiency: N/A
Efficacy: 87.1 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742583

CATALOG NUMBER: LD4D10D010-EU4DR600210IC9027-4LBDP1LI

Luminous Intensity Polar Plot

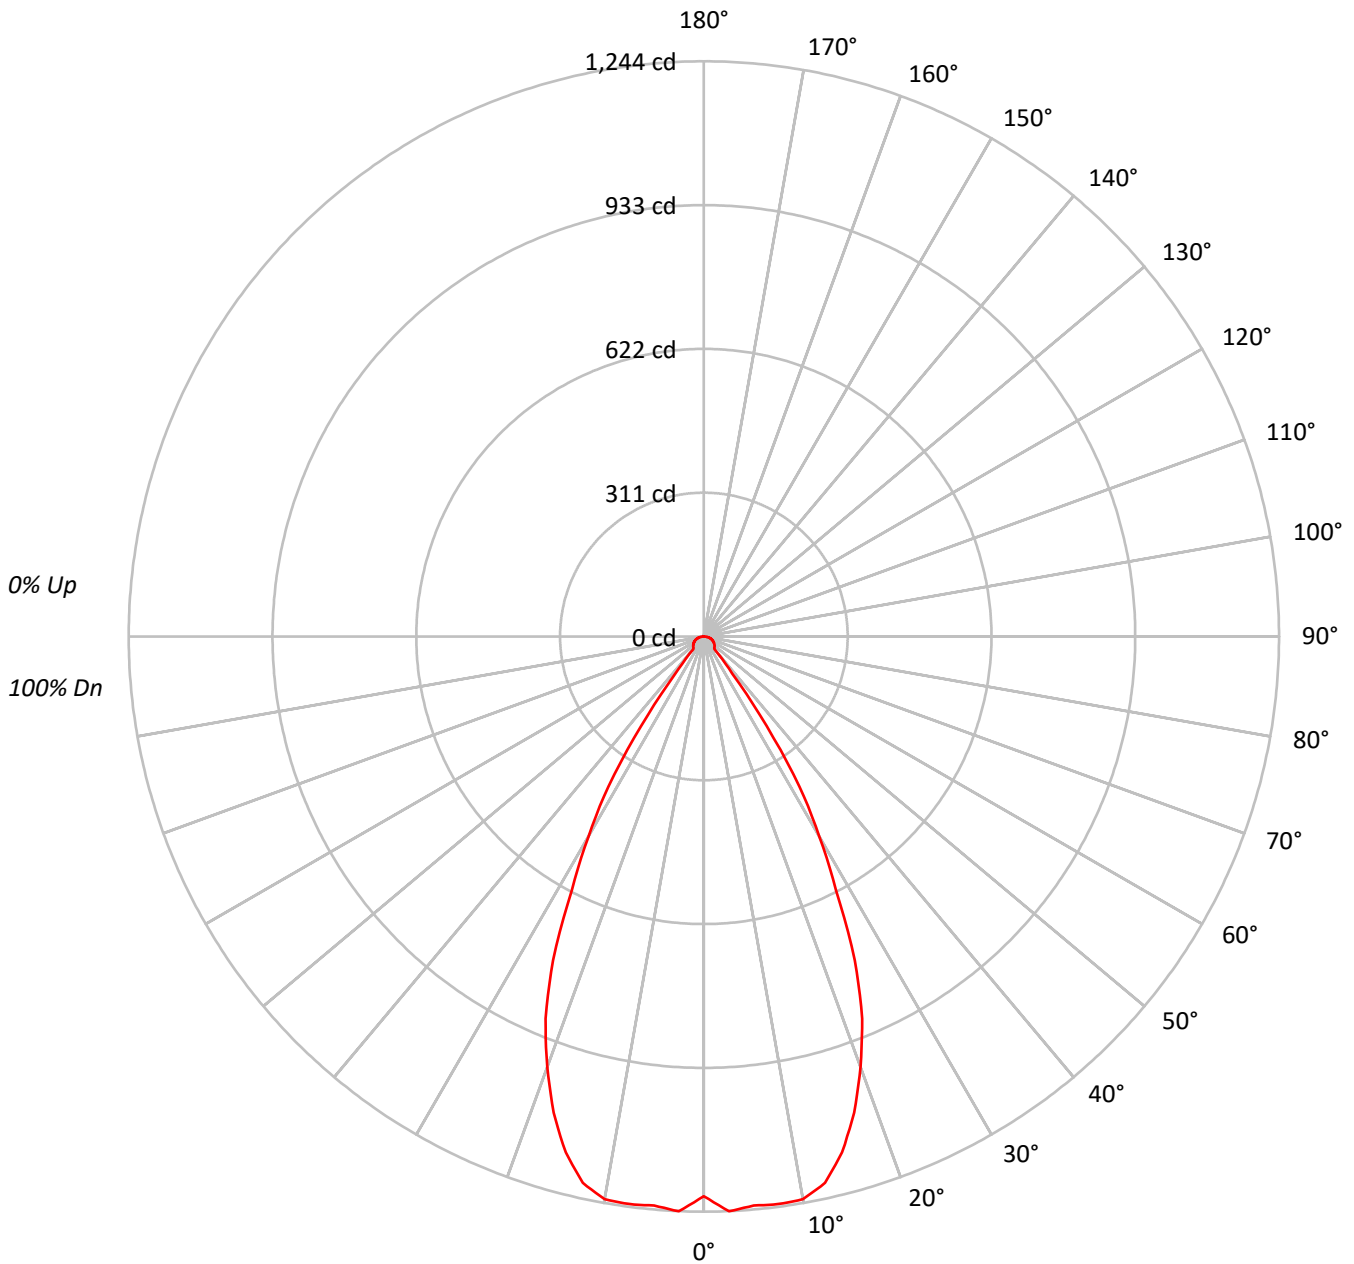



TEST NUMBER: P742583

CATALOG NUMBER: LD4D10D010-EU4DR600210IC9027-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	132249
5°	135496
10°	137130
15°	130637
20°	115180
25°	93154
30°	63019
35°	31572
40°	5120
45°	5006
50°	5116
55°	5200
60°	5332
65°	5455
70°	5590
75°	5657
80°	5474
85°	4513

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 5657 cd/sqm



TEST NUMBER: P742583

CATALOG NUMBER: LD4D10D010-EU4DR600210IC9027-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	118.1	11.6
10°-20°	319.4	31.3
20°-30°	343.7	33.7
30°-40°	149.4	14.7
40°-50°	25.1	2.5
50°-60°	24.4	2.4
60°-70°	20.9	2.0
70°-80°	14.0	1.4
80°-90°	4.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	781.2	76.7
0°-40°	930.6	91.3
0°-60°	980.1	96.2
0°-90°	1019.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1019.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1210	
5°	1235	118
15°	1155	319
25°	773	344
35°	237	149
45°	32	25
55°	27	24
65°	21	21
75°	13	14
85°	4	4
90°	0	



TEST NUMBER: P742583

CATALOG NUMBER: LD4D10D010-EU4DR600210IC9027-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	1210.4
2.5°	1244.3
5°	1235.4
7.5°	1238.2
10°	1236.0
12.5°	1210.5
15°	1154.9
17.5°	1080.2
20°	990.6
22.5°	894.7
25°	772.7
27.5°	618.1
30°	499.5
32.5°	385.0
35°	236.7
37.5°	101.3
40°	35.9
42.5°	33.1
45°	32.4
47.5°	31.3
50°	30.1
52.5°	28.6
55°	27.3
57.5°	25.8
60°	24.4
62.5°	22.9
65°	21.1
67.5°	19.4
70°	17.5
72.5°	15.4
75°	13.4
77.5°	11.0
80°	8.7
82.5°	6.1
85°	3.6
87.5°	1.3
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)