

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742691

Luminaire Tested: LD4D10D010-EU4DR650210IC9035-4LBS1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P742691  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D10D010-EU4DR650210IC9035-4LBS1LI  
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1021.8 lumens  
Efficiency: N/A  
Efficacy: 87.3 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 11.7  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P742691  
CATALOG NUMBER: LD4D10D010-EU4DR650210IC9035-4LBS1LI

### Luminous Intensity Polar Plot

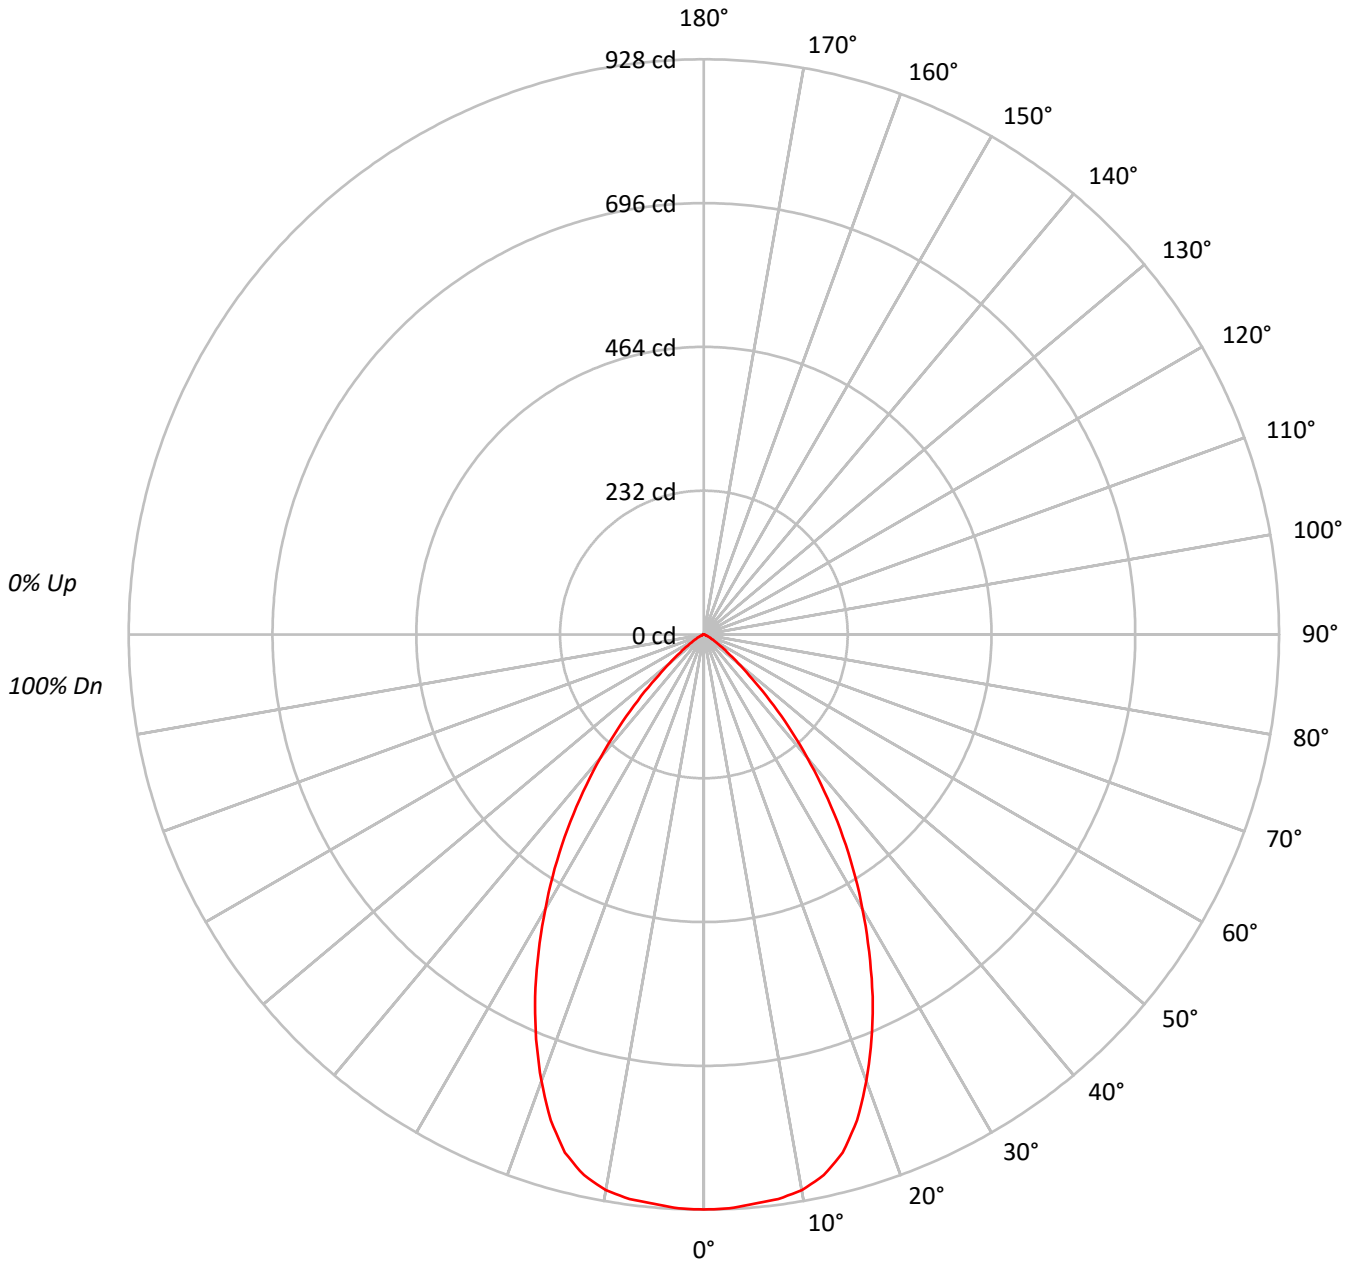



TEST NUMBER: P742691

CATALOG NUMBER: LD4D10D010-EU4DR650210IC9035-4LBS1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	54181
5°	54048
10°	53997
15°	52338
20°	47646
25°	41520
30°	34529
35°	27364
40°	19746
45°	12472
50°	6506
55°	3452
60°	1811
65°	995
70°	427
75°	474
80°	336
85°	268

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 12472 cd/sqm



TEST NUMBER: P742691

CATALOG NUMBER: LD4D10D010-EU4DR650210IC9035-4LBS1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	87.7	8.6
10°-20°	240.3	23.5
20°-30°	293.7	28.7
30°-40°	238.3	23.3
40°-50°	118.7	11.6
50°-60°	33.1	3.2
60°-70°	7.5	0.7
70°-80°	2.0	0.2
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	621.6	60.8
0°-40°	859.9	84.2
0°-60°	1011.7	99.0
0°-90°	1021.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1021.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	928	
5°	922	88
15°	866	240
25°	644	294
35°	384	238
45°	151	119
55°	34	33
65°	7	8
75°	2	2
85°	0	1
90°	0	



TEST NUMBER: P742691  
CATALOG NUMBER: LD4D10D010-EU4DR650210IC9035-4LBS1LI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	927.7
2.5°	927.0
5°	921.9
7.5°	918.8
10°	910.5
12.5°	893.6
15°	865.6
17.5°	821.7
20°	766.6
22.5°	707.1
25°	644.3
27.5°	577.1
30°	512.0
32.5°	447.8
35°	383.8
37.5°	319.8
40°	259.0
42.5°	202.0
45°	151.0
47.5°	105.3
50°	71.6
52.5°	49.3
55°	33.9
57.5°	22.9
60°	15.5
62.5°	10.8
65°	7.2
67.5°	3.7
70°	2.5
72.5°	2.3
75°	2.1
77.5°	1.4
80°	1.0
82.5°	0.7
85°	0.4
87.5°	0.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)