

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742778

Luminaire Tested: LD4D10D010-EU4DR700210IC9040-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P742778
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D10D010-EU4DR700210IC9040-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1149.1 lumens
Efficiency: N/A
Efficacy: 98.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 11.7
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742778

CATALOG NUMBER: LD4D10D010-EU4DR700210IC9040-4LBDP1LI

Luminous Intensity Polar Plot

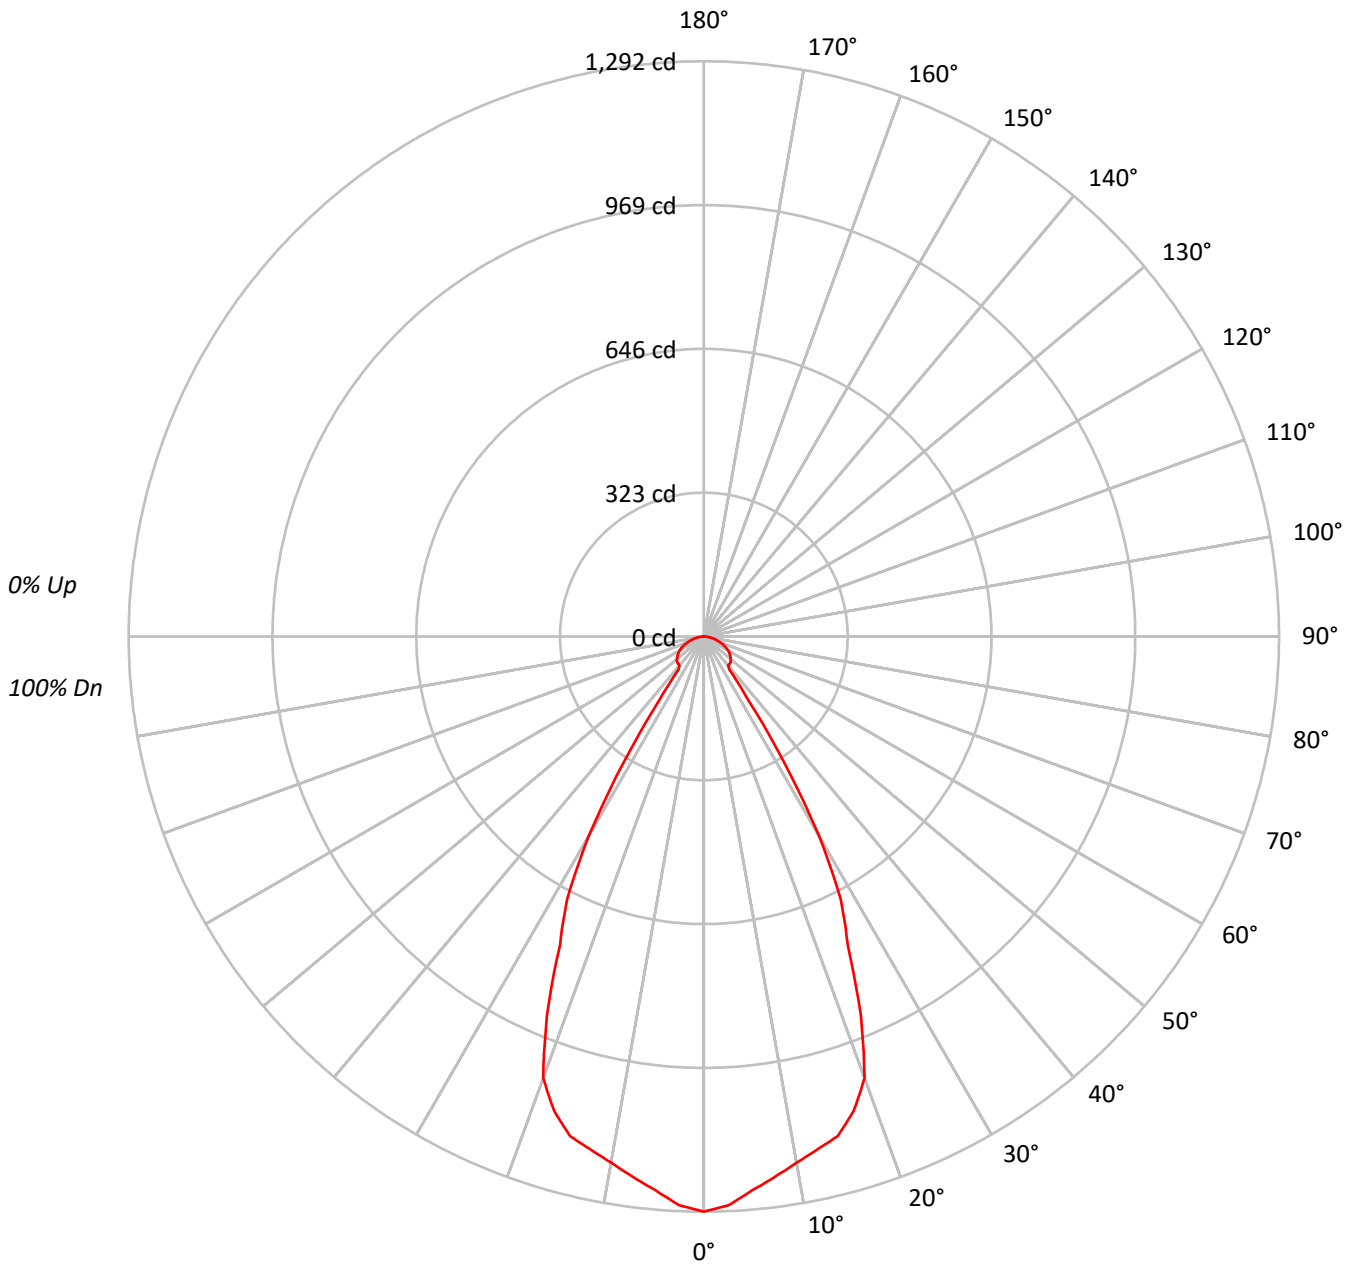



TEST NUMBER: P742778

CATALOG NUMBER: LD4D10D010-EU4DR700210IC9040-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	141154
5°	136955
10°	133136
15°	131394
20°	122703
25°	92177
30°	65163
35°	23075
40°	12138
45°	12933
50°	13377
55°	13639
60°	13723
65°	13444
70°	12682
75°	11736
80°	10445
85°	8525

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 13726 cd/sqm



TEST NUMBER: P742778

CATALOG NUMBER: LD4D10D010-EU4DR700210IC9040-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.8	10.2
10°-20°	323.1	28.1
20°-30°	355.8	31.0
30°-40°	135.9	11.8
40°-50°	64.2	5.6
50°-60°	63.8	5.6
60°-70°	51.1	4.4
70°-80°	29.4	2.6
80°-90°	8.0	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	796.7	69.3
0°-40°	932.6	81.2
0°-60°	1060.7	92.3
0°-90°	1149.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1149.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1292	
5°	1249	118
15°	1162	323
25°	765	356
35°	173	136
45°	84	64
55°	72	64
65°	52	51
75°	28	29
85°	7	8
90°	0	



TEST NUMBER: P742778

CATALOG NUMBER: LD4D10D010-EU4DR700210IC9040-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	1291.9
2.5°	1278.4
5°	1248.7
7.5°	1224.0
10°	1200.0
12.5°	1179.8
15°	1161.6
17.5°	1117.7
20°	1055.3
22.5°	920.7
25°	764.6
27.5°	665.6
30°	516.5
32.5°	333.6
35°	173.0
37.5°	93.5
40°	85.1
42.5°	84.5
45°	83.7
47.5°	81.8
50°	78.7
52.5°	75.3
55°	71.6
57.5°	67.5
60°	62.8
62.5°	57.5
65°	52.0
67.5°	45.8
70°	39.7
72.5°	33.5
75°	27.8
77.5°	21.9
80°	16.6
82.5°	11.6
85°	6.8
87.5°	2.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)