

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743125

Luminaire Tested: LD4D15D010-EU4DR300215IC9027-4LBS1LI

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P743125
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR300215IC9027-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1403.7 lumens
Efficiency: N/A
Efficacy: 88.8 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743125
CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBS1LI

Luminous Intensity Polar Plot

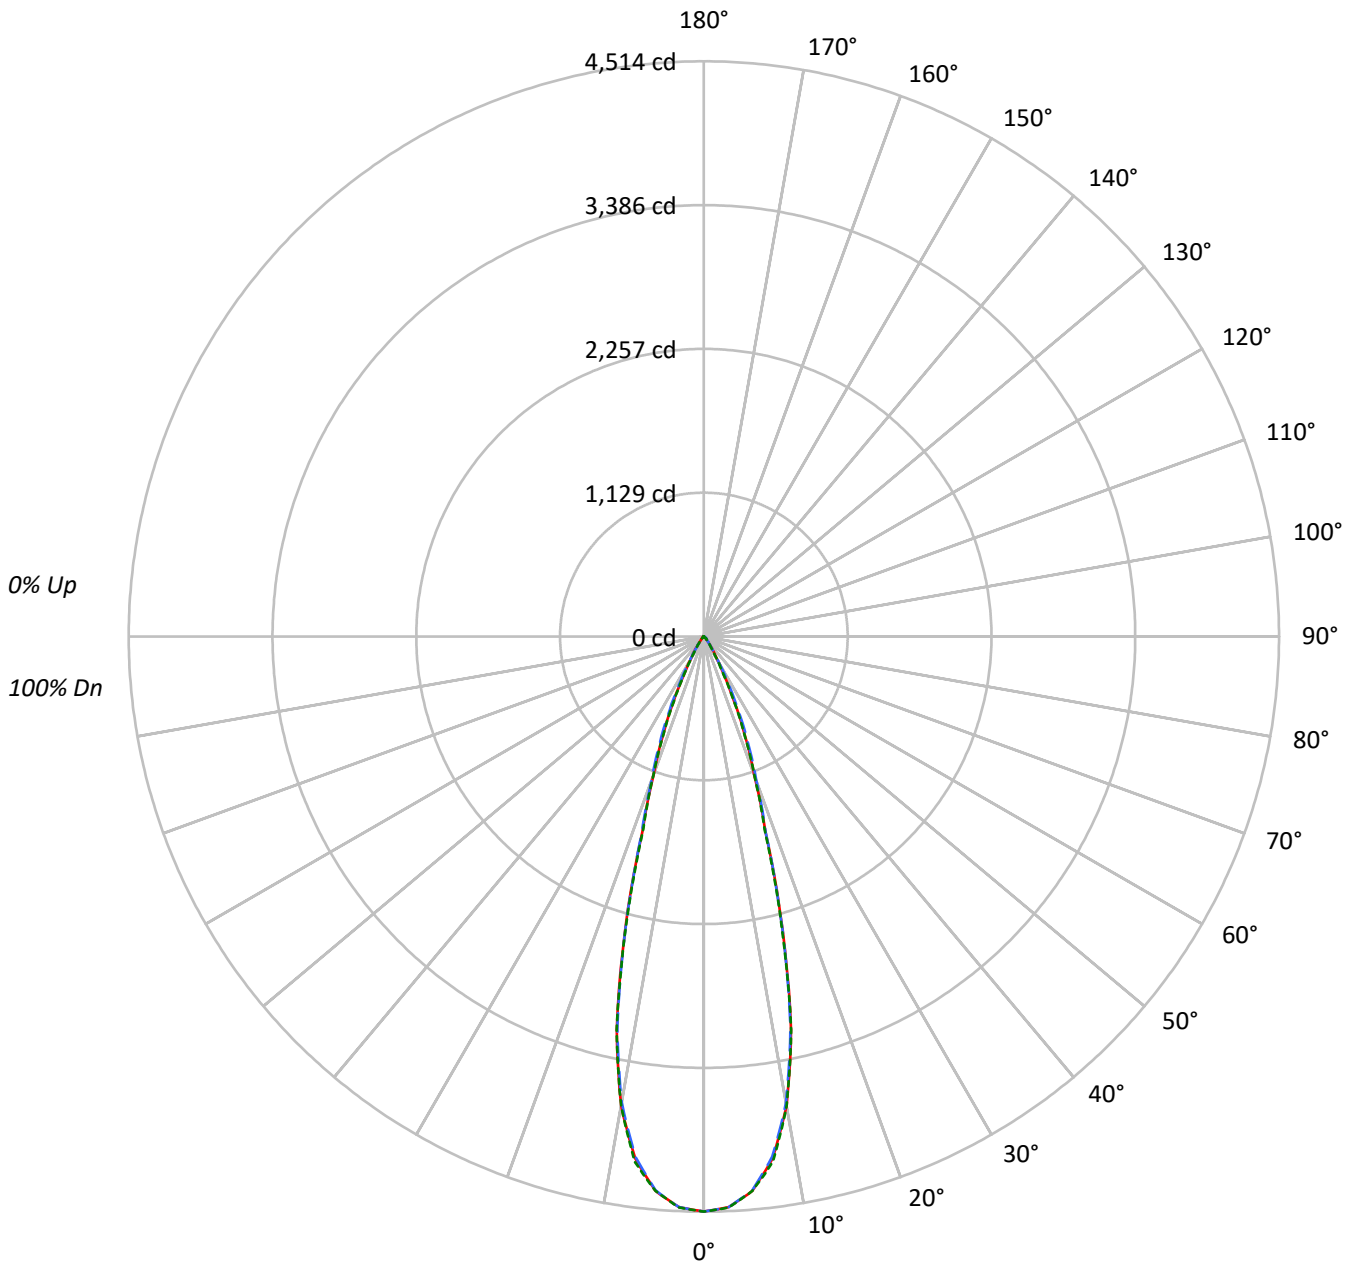



TEST NUMBER: P743125

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96						96													
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92						92													
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89						89													
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85						85													
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82						82													
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79						79													
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77						77													
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74						74													
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72						72													
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69						69													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	345479	345479	345479
5°	335565	335173	335580
10°	290650	288598	290580
15°	189630	188616	187665
20°	94293	97837	94171
25°	47498	53562	46527
30°	19020	20726	16572
35°	8821	8447	7083
40°	3807	4227	3587
45°	2685	3334	2706
50°	917	2429	976
55°	534	1014	560
60°	383	444	383
65°	235	235	235
70°	157	112	157
75°	0	59	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 3334 cd/sqm



TEST NUMBER: P743125

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	396.9	28.3
10°-20°	639.2	45.5
20°-30°	276.2	19.7
30°-40°	63.0	4.5
40°-50°	21.6	1.5
50°-60°	5.3	0.4
60°-70°	1.4	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1312.3	93.5
0°-40°	1375.3	98.0
0°-60°	1402.2	99.9
0°-90°	1403.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1403.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4514	4514	4514	4514	4514	
5°	4367	4363	4362	4371	4368	397
15°	2393	2364	2380	2372	2368	641
25°	562	584	634	569	551	269
35°	94	96	90	90	76	64
45°	25	31	31	31	25	18
55°	4	4	8	4	4	4
65°	1	1	1	1	1	1
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P743125

CATALOG NUMBER: LD4D15D010-EU4DR300215IC9027-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4513.5	4513.5	4513.5	4513.5	4513.5
2.5°	4483.6	4480.5	4482.3	4484.5	4485.4
5°	4367.3	4363.1	4362.2	4371.3	4367.5
7.5°	4132.6	4126.6	4117.5	4138.1	4157.4
10°	3739.5	3732.8	3713.1	3722.9	3738.6
12.5°	3159.1	3137.6	3137.2	3168.2	3164.0
15°	2393.0	2364.2	2380.2	2372.4	2368.2
17.5°	1609.2	1598.2	1619.4	1613.0	1585.3
20°	1157.6	1160.5	1201.1	1180.7	1156.1
22.5°	844.8	855.1	903.3	850.7	831.5
25°	562.4	583.7	634.2	568.8	550.9
27.5°	345.9	355.7	406.9	341.5	331.7
30°	215.2	210.3	234.5	201.2	187.5
32.5°	141.2	134.9	142.7	128.1	117.0
35°	94.4	96.4	90.4	89.7	75.8
37.5°	59.0	67.8	59.8	63.8	48.8
40°	38.1	49.2	42.3	46.8	35.9
42.5°	31.2	37.9	34.8	37.0	31.9
45°	24.8	30.8	30.8	30.8	25.0
47.5°	13.8	20.6	26.4	21.0	14.6
50°	7.7	10.4	20.4	10.9	8.2
52.5°	5.3	6.0	14.0	6.2	5.6
55°	4.0	4.2	7.6	4.4	4.2
57.5°	3.1	3.3	4.0	3.3	3.1
60°	2.5	2.5	2.9	2.6	2.5
62.5°	1.8	1.8	2.0	1.8	1.8
65°	1.3	1.3	1.3	1.3	1.3
67.5°	0.7	0.9	0.9	0.9	0.9
70°	0.7	0.5	0.5	0.5	0.7
72.5°	0.5	0.2	0.2	0.2	0.2
75°	0.0	0.0	0.2	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)