

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P742981

Luminaire Tested: LD4D15D010-EU4DR2015309030-4LBDP1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P742981
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR2015309030-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1423.0 lumens
Efficiency: N/A
Efficacy: 90.1 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P742981

CATALOG NUMBER: LD4D15D010-EU4DR2015309030-4LBDP1H

Luminous Intensity Polar Plot

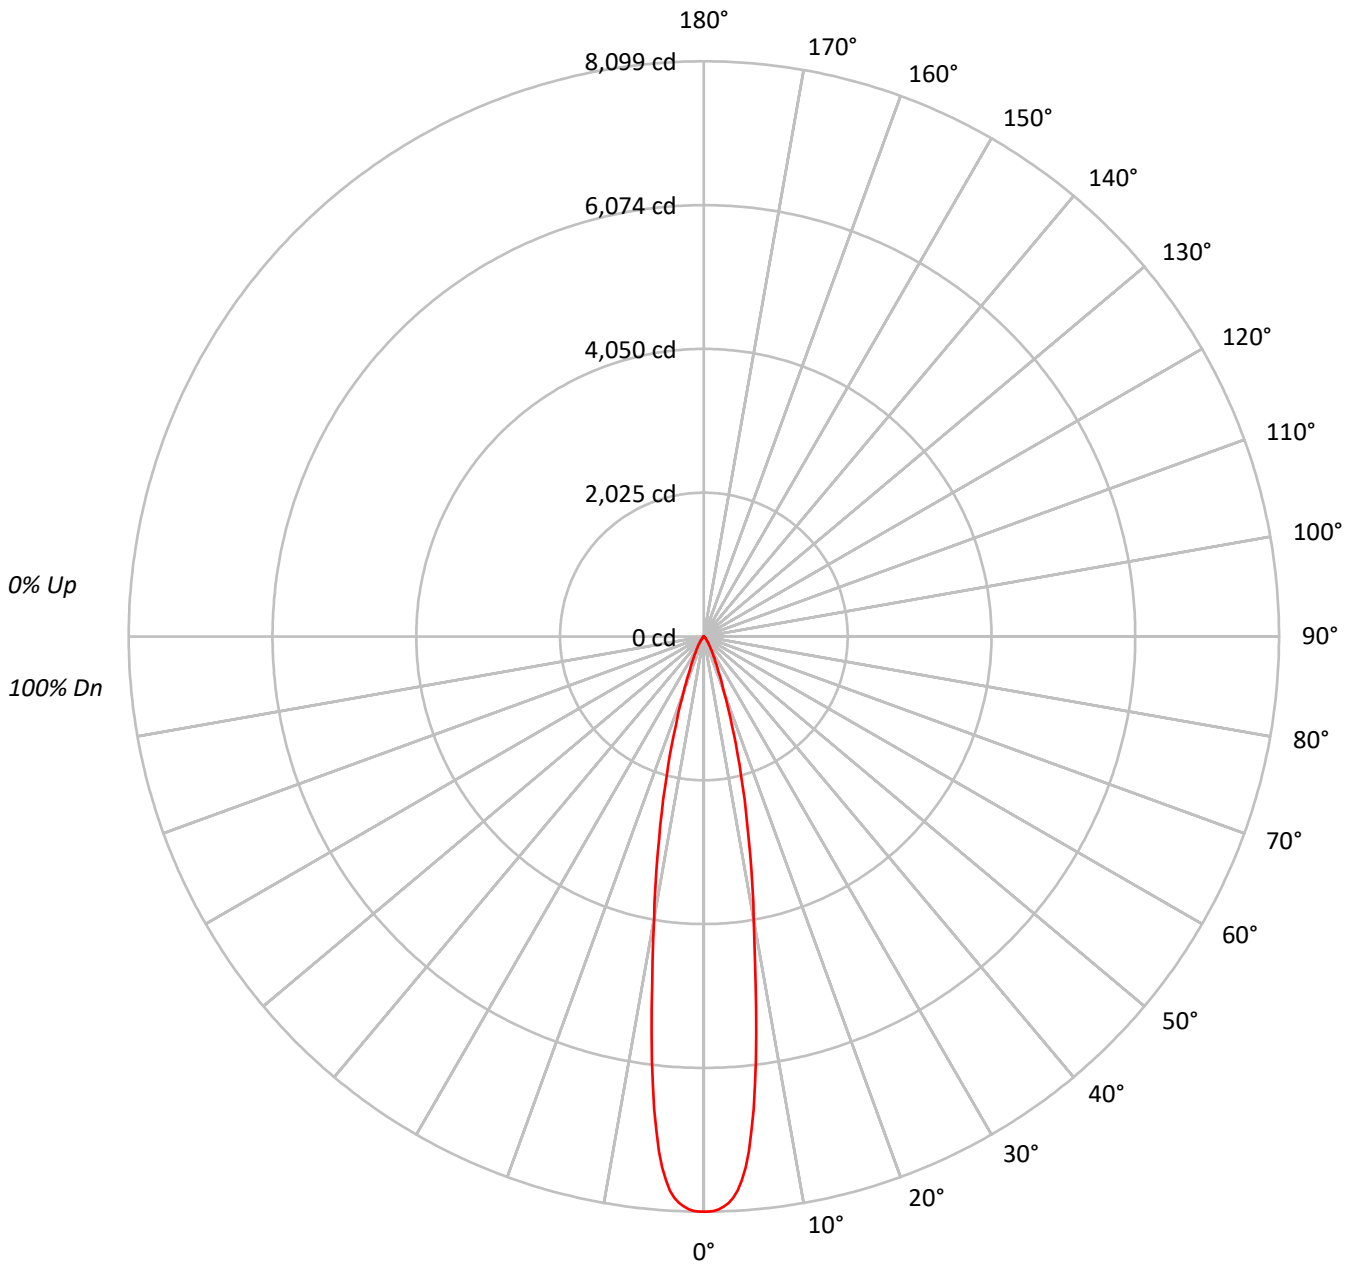



TEST NUMBER: P742981

CATALOG NUMBER: LD4D15D010-EU4DR2015309030-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	96	95															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	96	94	93															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	94	92	91															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	91	89	88															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	89	87	86															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	87	85	84															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	85	83	82															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	83	81	80															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	884947
5°	798380
10°	448101
15°	227780
20°	96437
25°	44521
30°	23567
35°	12698
40°	6789
45°	4017
50°	2329
55°	1238
60°	787
65°	569
70°	224
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 4017 cd/sqm



TEST NUMBER: P742981

CATALOG NUMBER: LD4D15D010-EU4DR2015309030-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	576.7	40.5
10°-20°	567.8	39.9
20°-30°	185.5	13.0
30°-40°	63.2	4.4
40°-50°	21.2	1.5
50°-60°	6.4	0.4
60°-70°	2.1	0.1
70°-80°	0.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1330.0	93.5
0°-40°	1393.1	97.9
0°-60°	1420.8	99.8
0°-90°	1423.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1423.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	8099	
5°	7279	577
15°	2014	568
25°	369	185
35°	95	63
45°	26	21
55°	6	6
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P742981

CATALOG NUMBER: LD4D15D010-EU4DR2015309030-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	8099.4
0.5°	8099.4
1°	8089.3
1.5°	8069.1
2°	8032.3
2.5°	7983.2
3°	7914.0
3.5°	7817.4
4°	7673.8
4.5°	7499.3
5°	7279.3
5.5°	6990.1
6°	6693.7
6.5°	6354.0
7°	6021.5
7.5°	5632.1
8°	5284.4
8.5°	4934.6
9°	4611.5
9.5°	4315.1
10°	4038.9
12.5°	2900.0
15°	2013.7
17.5°	1315.5
20°	829.4
22.5°	537.3
25°	369.3
27.5°	259.6
30°	186.8
32.5°	134.1
35°	95.2
37.5°	66.4
40°	47.6
42.5°	34.6
45°	26.0
47.5°	20.2
50°	13.7
52.5°	8.7
55°	6.5
57.5°	5.0
60°	3.6
62.5°	2.9
65°	2.2



TEST NUMBER: P742981
CATALOG NUMBER: LD4D15D010-EU4DR2015309030-4LBDP1H

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		1.4
70°		0.7

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)