

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743611

Luminaire Tested: LD4D15D010-EU4DR600215IC9040-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P743611
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR600215IC9040-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1460.9 lumens
Efficiency: N/A
Efficacy: 92.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743611
CATALOG NUMBER: LD4D15D010-EU4DR600215IC9040-4LBDP1H

Luminous Intensity Polar Plot

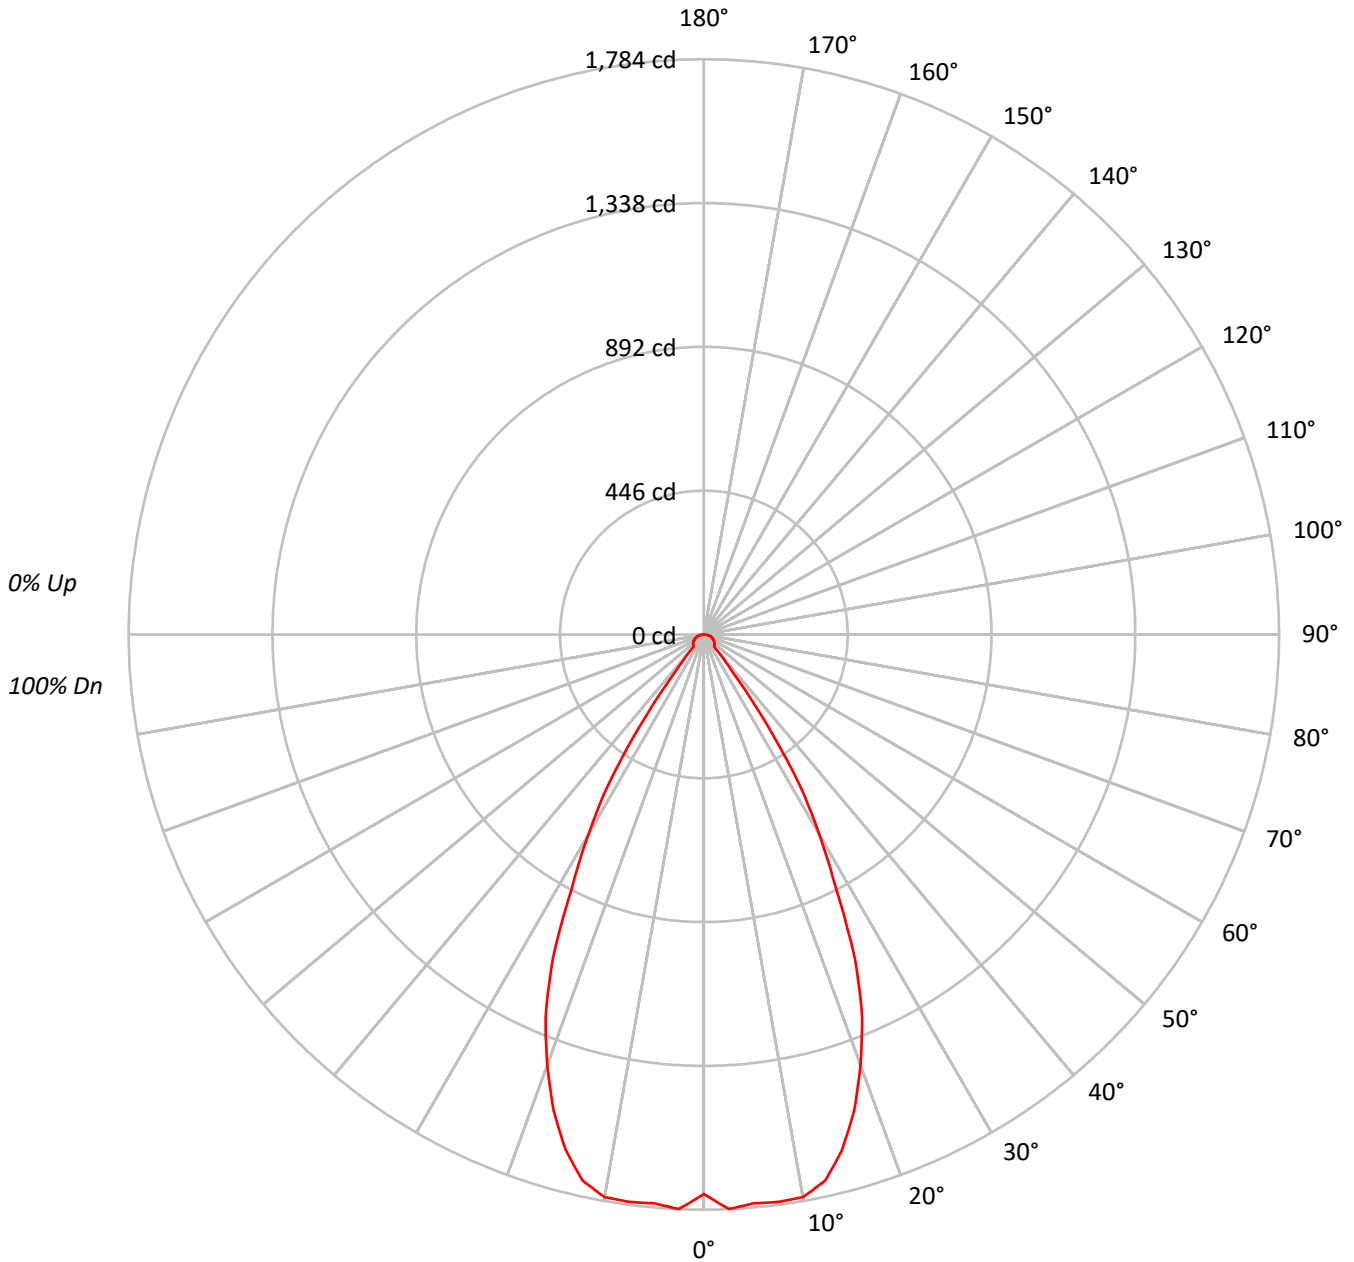



TEST NUMBER: P743611

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9040-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93		
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86		
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80		
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70		
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66		
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62		
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59		
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55		
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	189578
5°	194240
10°	196586
15°	187273
20°	165119
25°	133552
30°	90333
35°	45270
40°	7345
45°	7185
50°	7326
55°	7448
60°	7648
65°	7834
70°	7986
75°	8105
80°	7802
85°	6519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 8105 cd/sqm



TEST NUMBER: P743611

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9040-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	169.3	11.6
10°-20°	458.0	31.3
20°-30°	492.7	33.7
30°-40°	214.2	14.7
40°-50°	36.0	2.5
50°-60°	35.0	2.4
60°-70°	29.9	2.0
70°-80°	20.0	1.4
80°-90°	6.0	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1119.9	76.7
0°-40°	1334.1	91.3
0°-60°	1405.0	96.2
0°-90°	1460.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1460.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1735	
5°	1771	169
15°	1656	458
25°	1108	493
35°	339	214
45°	46	36
55°	39	35
65°	30	30
75°	19	20
85°	5	6
90°	0	



TEST NUMBER: P743611

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9040-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1735.1
2.5°	1783.8
5°	1771.0
7.5°	1775.1
10°	1771.9
12.5°	1735.3
15°	1655.6
17.5°	1548.6
20°	1420.1
22.5°	1282.6
25°	1107.8
27.5°	886.1
30°	716.0
32.5°	551.9
35°	339.4
37.5°	145.2
40°	51.5
42.5°	47.4
45°	46.5
47.5°	44.9
50°	43.1
52.5°	41.1
55°	39.1
57.5°	37.0
60°	35.0
62.5°	32.7
65°	30.3
67.5°	27.8
70°	25.0
72.5°	22.1
75°	19.2
77.5°	15.8
80°	12.4
82.5°	8.8
85°	5.2
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)