

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743691

Luminaire Tested: LD4D15D010-EU4DR650215IC9040-4LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P743691  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D15D010-EU4DR650215IC9040-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1276.9 lumens  
Efficiency: N/A  
Efficacy: 80.8 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P743691  
CATALOG NUMBER: LD4D15D010-EU4DR650215IC9040-4LBS1MW

### Luminous Intensity Polar Plot

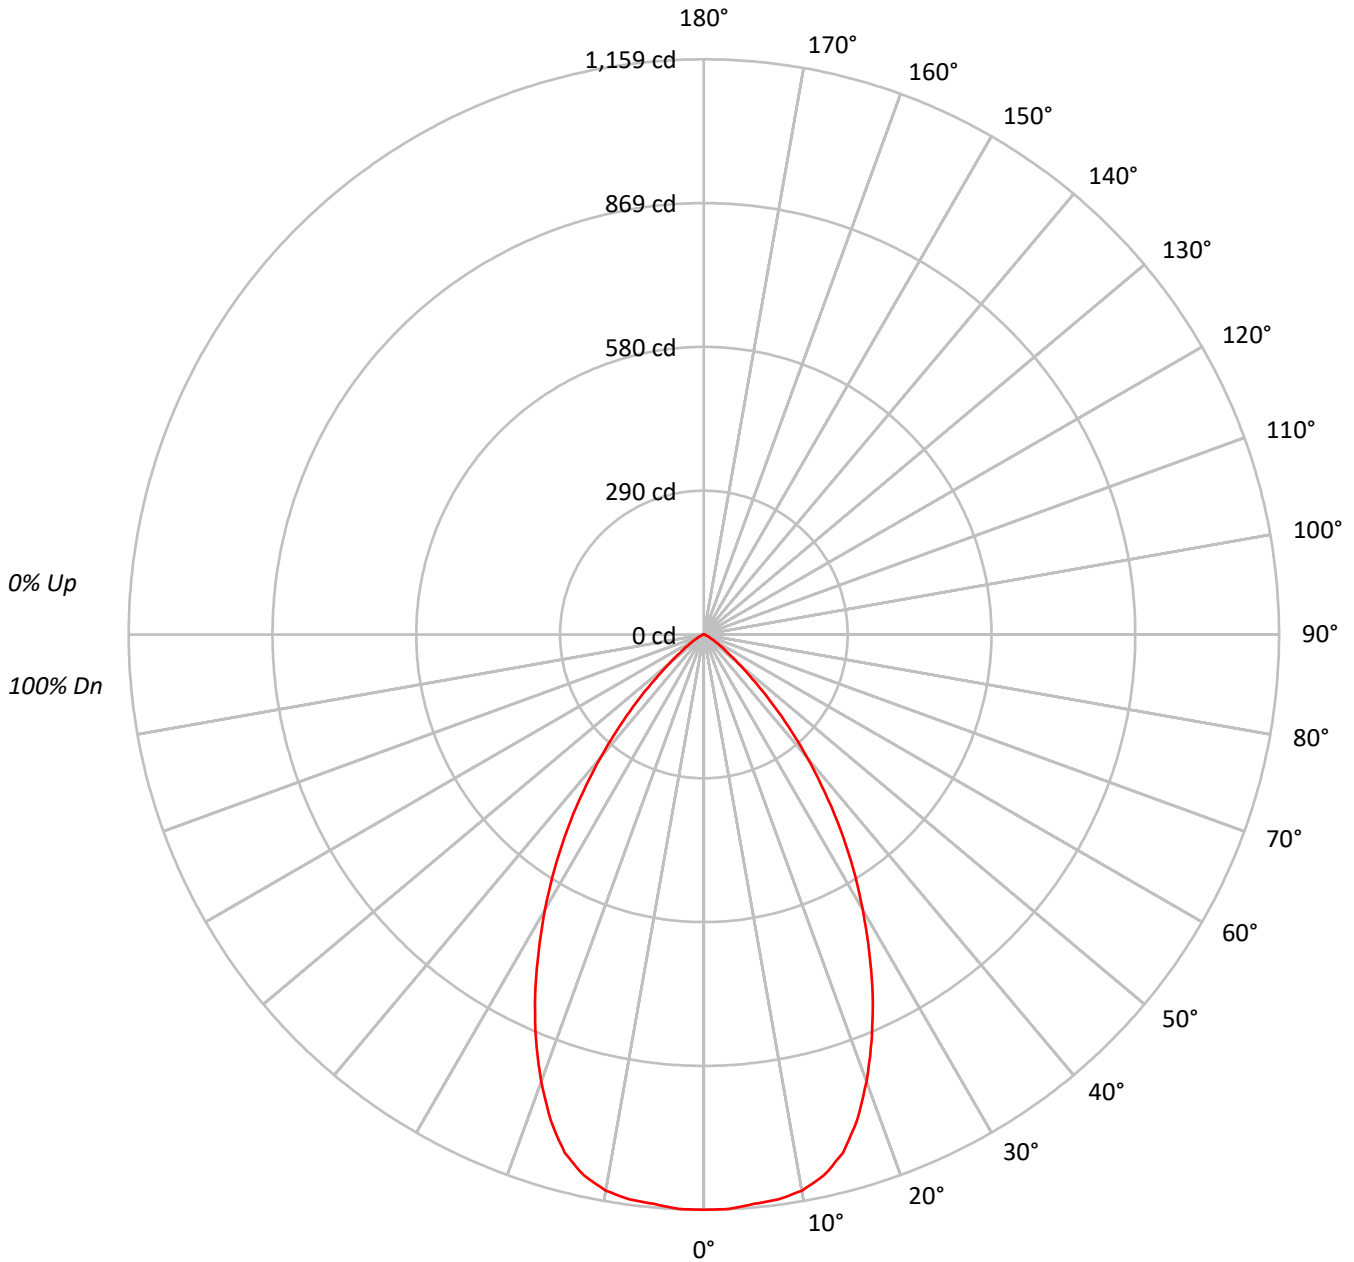



TEST NUMBER: P743691

CATALOG NUMBER: LD4D15D010-EU4DR650215IC9040-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	67708
5°	67538
10°	67483
15°	65404
20°	59542
25°	51888
30°	43154
35°	34195
40°	24679
45°	15594
50°	8123
55°	4317
60°	2266
65°	1258
70°	529
75°	587
80°	404
85°	335

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 15594 cd/sqm



TEST NUMBER: P743691

CATALOG NUMBER: LD4D15D010-EU4DR650215IC9040-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	109.6	8.6
10°-20°	300.2	23.5
20°-30°	367.0	28.7
30°-40°	297.8	23.3
40°-50°	148.4	11.6
50°-60°	41.4	3.2
60°-70°	9.4	0.7
70°-80°	2.5	0.2
80°-90°	0.6	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	776.9	60.8
0°-40°	1074.6	84.2
0°-60°	1264.4	99.0
0°-90°	1276.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1276.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1159	
5°	1152	110
15°	1082	300
25°	805	367
35°	480	298
45°	189	148
55°	42	41
65°	9	9
75°	3	2
85°	0	1
90°	0	



TEST NUMBER: P743691

CATALOG NUMBER: LD4D15D010-EU4DR650215IC9040-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1159.3
2.5°	1158.5
5°	1152.0
7.5°	1148.3
10°	1137.9
12.5°	1116.7
15°	1081.7
17.5°	1026.8
20°	958.0
22.5°	883.7
25°	805.2
27.5°	721.2
30°	639.9
32.5°	559.7
35°	479.6
37.5°	399.7
40°	323.7
42.5°	252.5
45°	188.8
47.5°	131.5
50°	89.4
52.5°	61.6
55°	42.4
57.5°	28.6
60°	19.4
62.5°	13.5
65°	9.1
67.5°	4.6
70°	3.1
72.5°	2.9
75°	2.6
77.5°	1.7
80°	1.2
82.5°	0.9
85°	0.5
87.5°	0.3
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)