

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743624

Luminaire Tested: LD4D15D010-EU4DR600215IC9050-4LBDP1H

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P743624
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D15D010-EU4DR600215IC9050-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1443.8 lumens
Efficiency: N/A
Efficacy: 91.4 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P743624
CATALOG NUMBER: LD4D15D010-EU4DR600215IC9050-4LBDP1H

Luminous Intensity Polar Plot

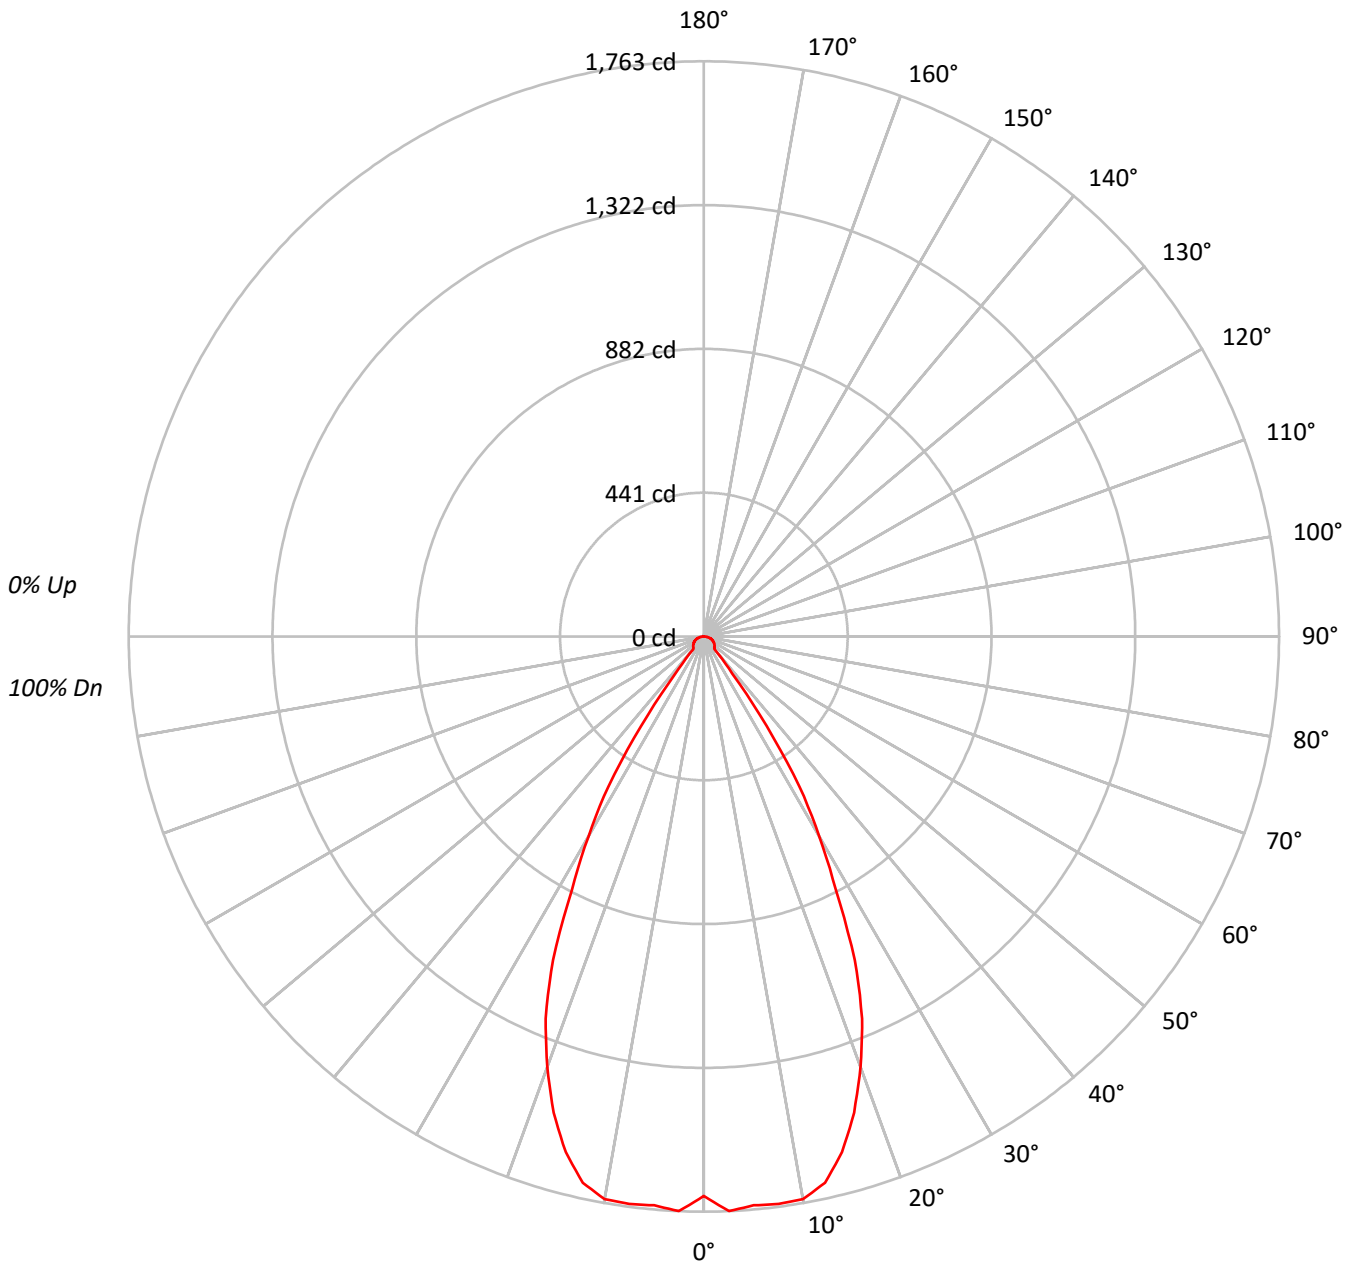



TEST NUMBER: P743624

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9050-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	187338
5°	191948
10°	194267
15°	185068
20°	163166
25°	131973
30°	89273
35°	44737
40°	7260
45°	7108
50°	7241
55°	7353
60°	7561
65°	7730
70°	7923
75°	8021
80°	7739
85°	6519

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 8021 cd/sqm



TEST NUMBER: P743624

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9050-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	167.3	11.6
10°-20°	452.5	31.3
20°-30°	486.9	33.7
30°-40°	211.6	14.7
40°-50°	35.6	2.5
50°-60°	34.6	2.4
60°-70°	29.6	2.0
70°-80°	19.8	1.4
80°-90°	5.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1106.7	76.7
0°-40°	1318.4	91.3
0°-60°	1388.5	96.2
0°-90°	1443.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1443.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1715	
5°	1750	167
15°	1636	453
25°	1095	487
35°	335	212
45°	46	36
55°	39	35
65°	30	30
75°	19	20
85°	5	6
90°	0	



TEST NUMBER: P743624

CATALOG NUMBER: LD4D15D010-EU4DR600215IC9050-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	1714.6
2.5°	1762.8
5°	1750.1
7.5°	1754.1
10°	1751.0
12.5°	1714.8
15°	1636.1
17.5°	1530.3
20°	1403.3
22.5°	1267.4
25°	1094.7
27.5°	875.6
30°	707.6
32.5°	545.3
35°	335.4
37.5°	143.5
40°	50.9
42.5°	46.9
45°	46.0
47.5°	44.4
50°	42.6
52.5°	40.6
55°	38.6
57.5°	36.6
60°	34.6
62.5°	32.4
65°	29.9
67.5°	27.4
70°	24.8
72.5°	21.9
75°	19.0
77.5°	15.6
80°	12.3
82.5°	8.7
85°	5.2
87.5°	1.8
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)