

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P743778

Luminaire Tested: LD4D15D010-EU4DR700215IC9050-4LBS1MW

Issue Date: 1/30/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P743778  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-76)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 1/30/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D15D010-EU4DR700215IC9050-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1452.5 lumens  
Efficiency: N/A  
Efficacy: 91.9 lumens/watt  
Spacing Criteria (0/90/45): 1.1 / 1.1 / 1.04  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 15.8  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P743778

CATALOG NUMBER: LD4D15D010-EU4DR700215IC9050-4LBS1MW

### Luminous Intensity Polar Plot

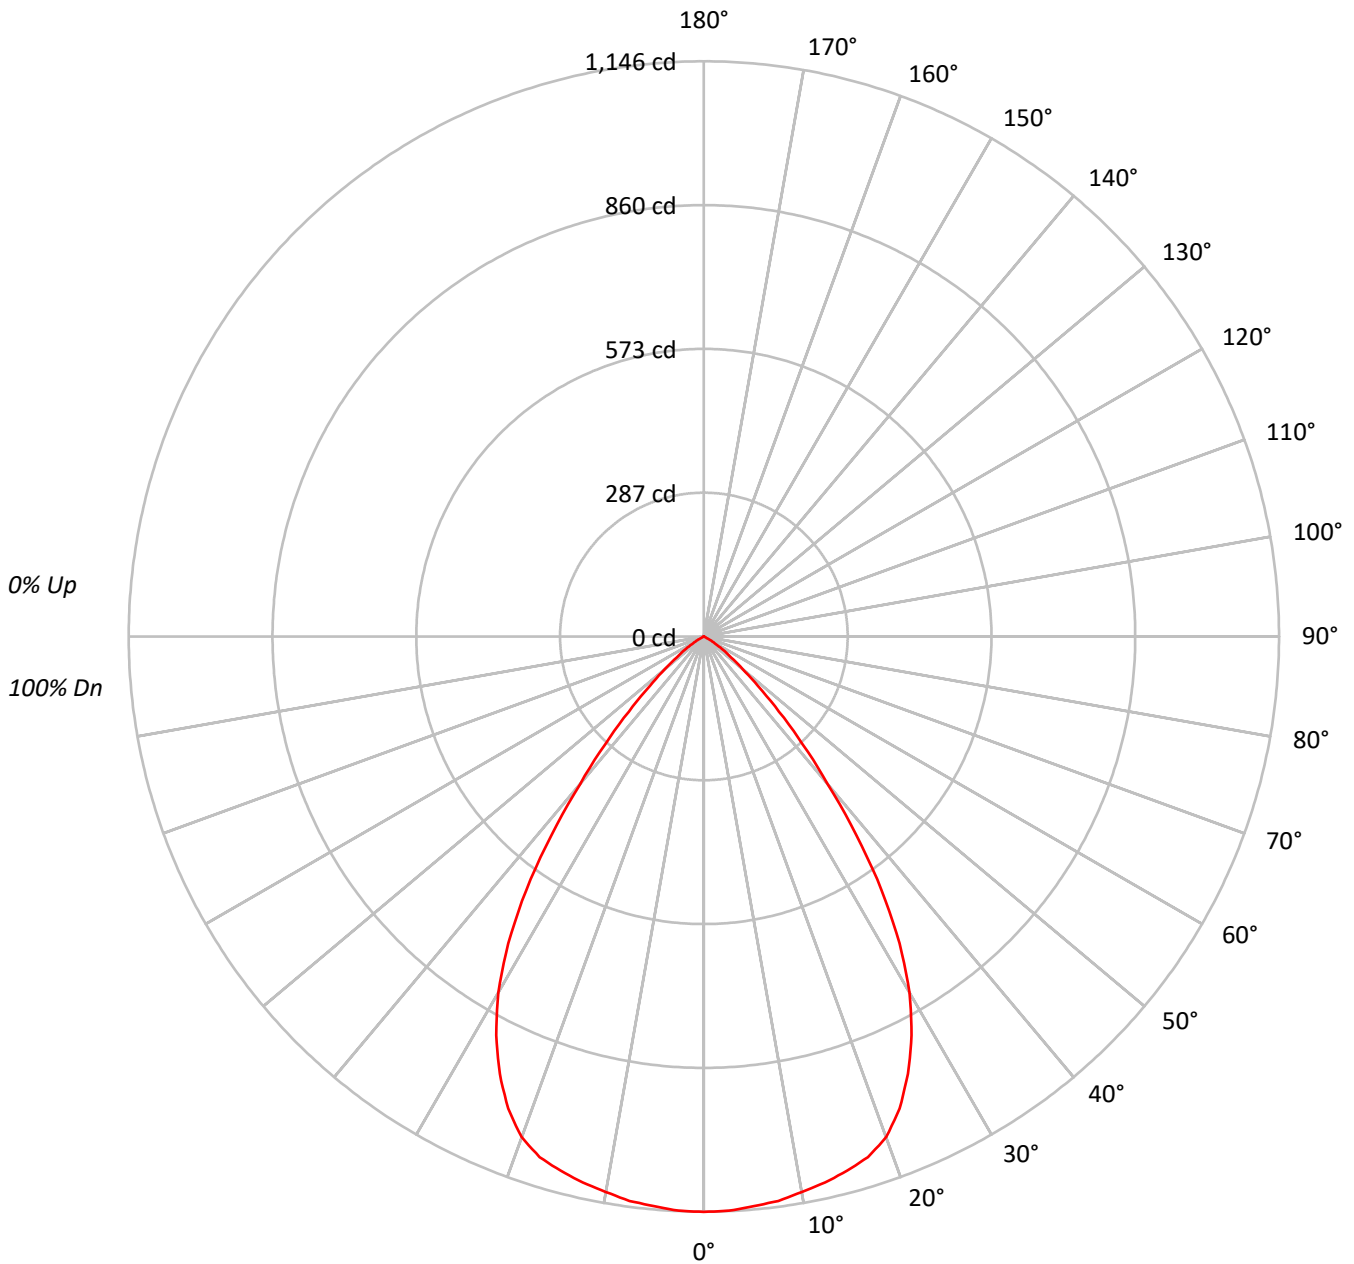



TEST NUMBER: P743778

CATALOG NUMBER: LD4D15D010-EU4DR700215IC9050-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	107	105	111	108	106	103	104	102	100	100	99	97	97	95	94	93			93
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85
3	101	94	88	84	99	92	87	83	90	85	82	87	84	81	85	82	79	78			78
4	95	87	81	76	93	86	80	76	83	78	75	81	77	74	79	76	73	71			71
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	65			65
6	84	75	68	63	83	74	68	63	72	67	63	71	66	62	69	65	62	60			60
7	80	69	63	58	78	69	63	58	67	62	58	66	61	57	65	61	57	56			56
8	75	65	58	54	74	64	58	54	63	57	53	62	57	53	61	56	53	51			51
9	71	61	54	50	70	60	54	50	59	53	50	58	53	49	57	53	49	48			48
10	67	57	50	46	66	56	50	46	55	50	46	55	50	46	54	49	46	44			44

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	125267
5°	124956
10°	124681
15°	124653
20°	123435
25°	115951
30°	103366
35°	82417
40°	54713
45°	32711
50°	16964
55°	8915
60°	3147
65°	52
70°	0
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 32711 cd/sqm



TEST NUMBER: P743778

CATALOG NUMBER: LD4D15D010-EU4DR700215IC9050-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	108.3	7.5
10°-20°	310.7	21.4
20°-30°	438.4	30.2
30°-40°	378.4	26.1
40°-50°	169.5	11.7
50°-60°	44.4	3.1
60°-70°	2.9	0.2
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	857.4	59.0
0°-40°	1235.8	85.1
0°-60°	1449.7	99.8
0°-90°	1452.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1452.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1146	
5°	1139	108
15°	1102	311
25°	962	438
35°	618	378
45°	212	169
55°	47	44
65°	0	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P743778

CATALOG NUMBER: LD4D15D010-EU4DR700215IC9050-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1146.5
2.5°	1145.2
5°	1139.3
7.5°	1134.3
10°	1123.8
12.5°	1114.3
15°	1102.0
17.5°	1087.7
20°	1061.6
22.5°	1018.4
25°	961.8
27.5°	896.0
30°	819.3
32.5°	725.5
35°	617.9
37.5°	499.1
40°	383.6
42.5°	291.5
45°	211.7
47.5°	146.0
50°	99.8
52.5°	68.9
55°	46.8
57.5°	28.2
60°	14.4
62.5°	4.5
65°	0.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)