

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744686

Luminaire Tested: LD4D20D010-EU4DR6520359035-4LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744686  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D20D010-EU4DR6520359035-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1795.5 lumens  
Efficiency: N/A  
Efficacy: 77.7 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 23.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744686  
CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBS1H

### Luminous Intensity Polar Plot

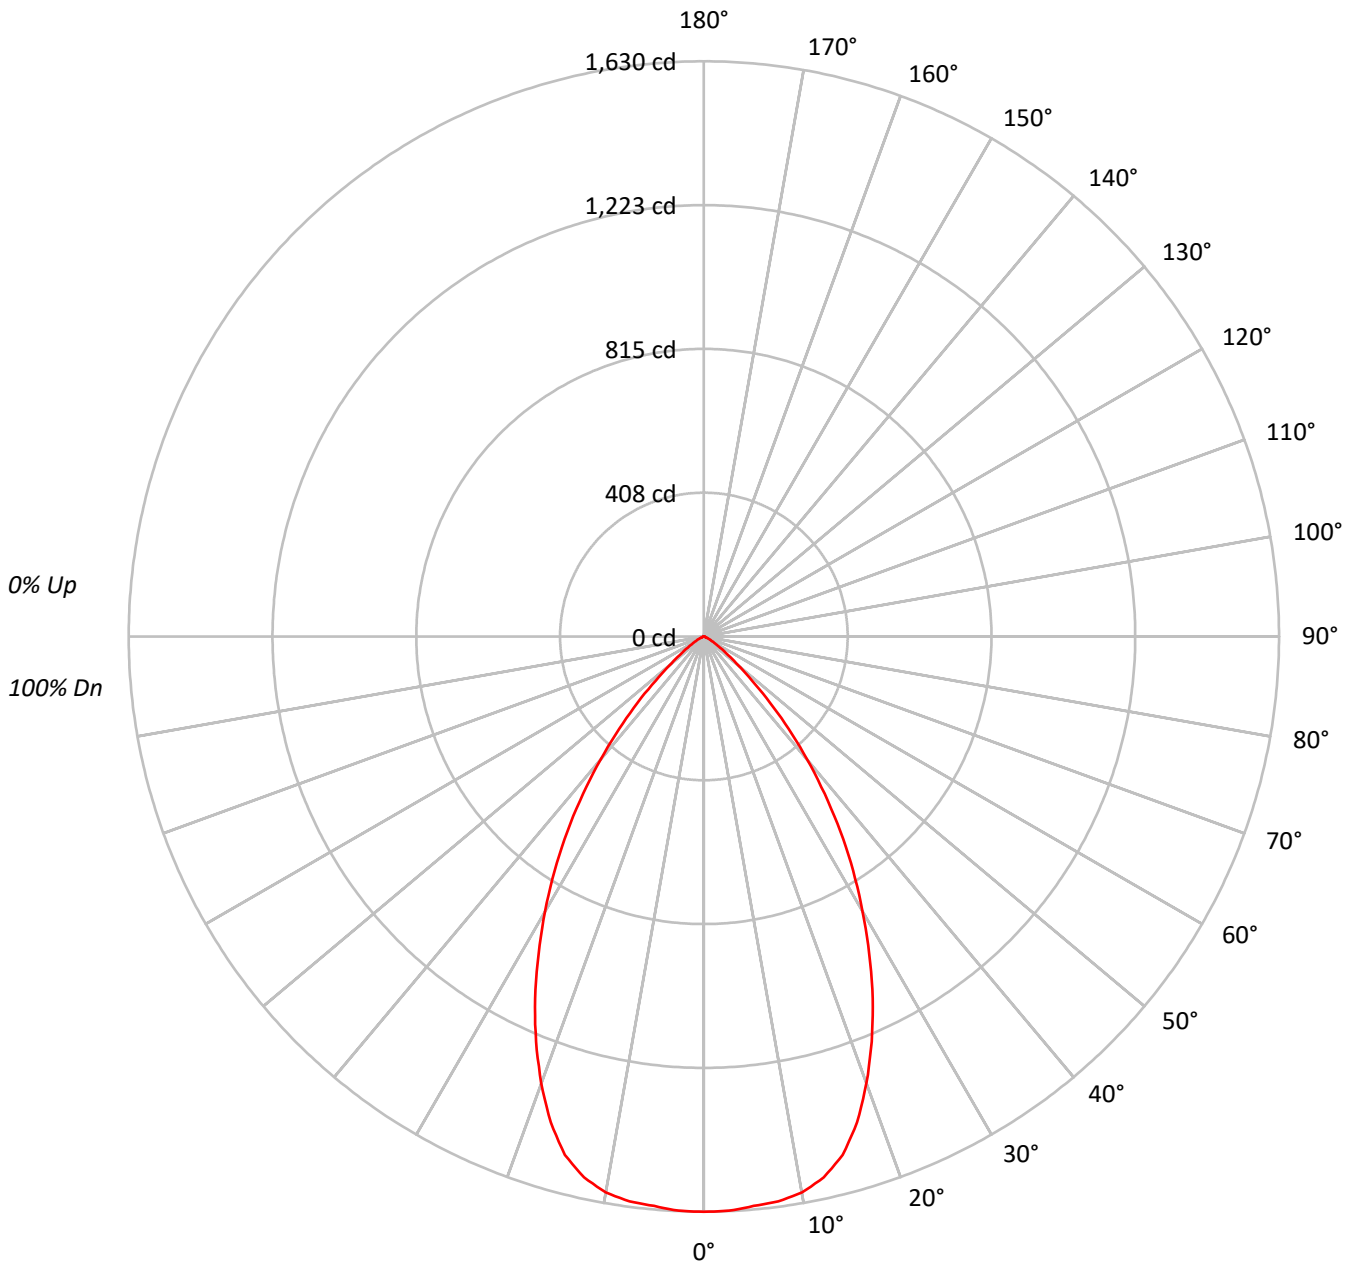



TEST NUMBER: P744686  
 CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93																			
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85																			
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78																			
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72																			
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66																			
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61																			
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56																			
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52																			
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49																			
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	95216
5°	94976
10°	94894
15°	91966
20°	83725
25°	72961
30°	60682
35°	48083
40°	34705
45°	21921
50°	11430
55°	6069
60°	3189
65°	1755
70°	734
75°	812
80°	572
85°	469

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 21921 cd/sqm



TEST NUMBER: P744686

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	154.2	8.6
10°-20°	422.2	23.5
20°-30°	516.0	28.7
30°-40°	418.7	23.3
40°-50°	208.6	11.6
50°-60°	58.2	3.2
60°-70°	13.2	0.7
70°-80°	3.5	0.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1092.4	60.8
0°-40°	1511.1	84.2
0°-60°	1777.9	99.0
0°-90°	1795.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1795.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1630	
5°	1620	154
15°	1521	422
25°	1132	516
35°	674	419
45°	265	209
55°	60	58
65°	13	13
75°	4	3
85°	1	1
90°	0	



TEST NUMBER: P744686

CATALOG NUMBER: LD4D20D010-EU4DR6520359035-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1630.3
2.5°	1629.1
5°	1620.0
7.5°	1614.7
10°	1600.1
12.5°	1570.3
15°	1521.0
17.5°	1443.9
20°	1347.1
22.5°	1242.6
25°	1132.2
27.5°	1014.1
30°	899.8
32.5°	787.0
35°	674.4
37.5°	562.0
40°	455.2
42.5°	355.1
45°	265.4
47.5°	184.9
50°	125.8
52.5°	86.7
55°	59.6
57.5°	40.2
60°	27.3
62.5°	18.9
65°	12.7
67.5°	6.5
70°	4.3
72.5°	4.1
75°	3.6
77.5°	2.4
80°	1.7
82.5°	1.2
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)