

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744011

Luminaire Tested: LD4D20D010-EU4DR2015309050-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744011
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D20D010-EU4DR2015309050-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2315.4 lumens
Efficiency: N/A
Efficacy: 100.2 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744011
CATALOG NUMBER: LD4D20D010-EU4DR2015309050-4LBS1LI

Luminous Intensity Polar Plot

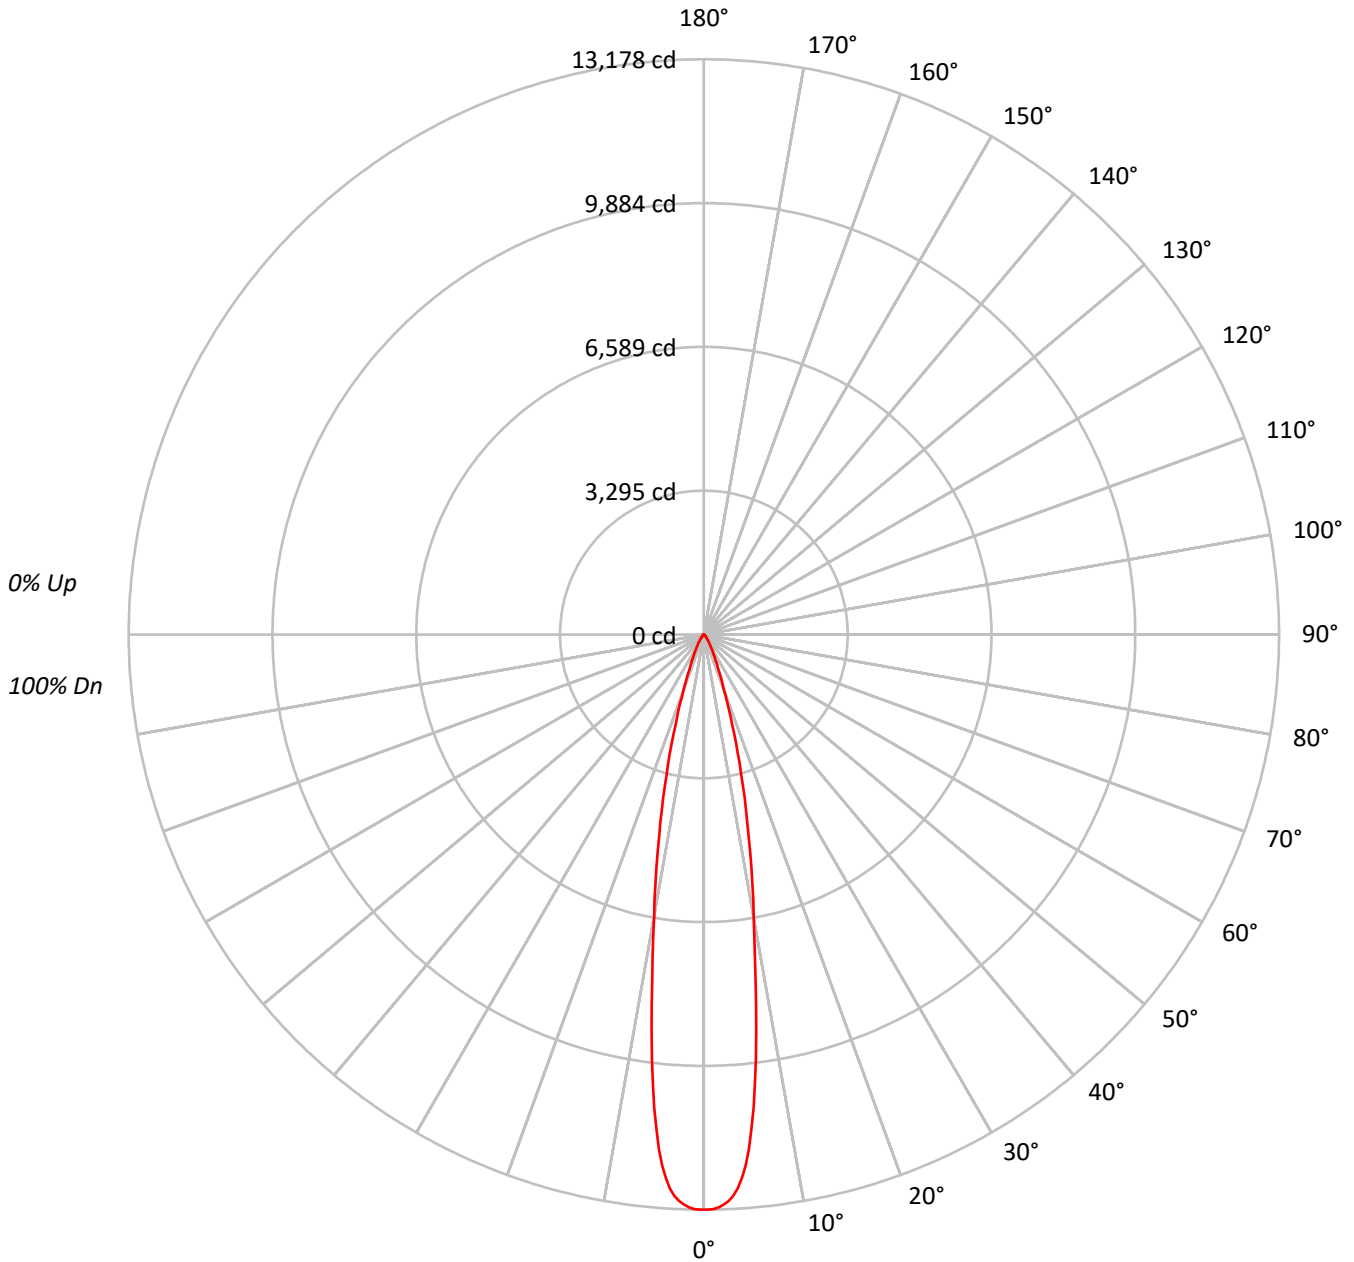



TEST NUMBER: P744011

CATALOG NUMBER: LD4D20D010-EU4DR2015309050-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1439871
5°	1299039
10°	729095
15°	370610
20°	156910
25°	72430
30°	38341
35°	20661
40°	11054
45°	6521
50°	3791
55°	2019
60°	1289
65°	905
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6521 cd/sqm



TEST NUMBER: P744011

CATALOG NUMBER: LD4D20D010-EU4DR2015309050-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	938.3	40.5
10°-20°	923.9	39.9
20°-30°	301.8	13.0
30°-40°	102.8	4.4
40°-50°	34.6	1.5
50°-60°	10.4	0.4
60°-70°	3.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2164.0	93.5
0°-40°	2266.8	97.9
0°-60°	2311.8	99.8
0°-90°	2315.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2315.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13178	
5°	11844	938
15°	3276	924
25°	601	302
35°	155	103
45°	42	35
55°	11	10
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744011

CATALOG NUMBER: LD4D20D010-EU4DR2015309050-4LBS1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	13178.3
0.5°	13178.3
1°	13161.9
1.5°	13129.0
2°	13069.2
2.5°	12989.4
3°	12876.7
3.5°	12719.5
4°	12486.0
4.5°	12202.0
5°	11844.1
5.5°	11373.5
6°	10891.2
6.5°	10338.5
7°	9797.5
7.5°	9163.8
8°	8598.2
8.5°	8029.0
9°	7503.3
9.5°	7021.0
10°	6571.6
12.5°	4718.6
15°	3276.4
17.5°	2140.5
20°	1349.5
22.5°	874.3
25°	600.8
27.5°	422.5
30°	303.9
32.5°	218.3
35°	154.9
37.5°	108.0
40°	77.5
42.5°	56.3
45°	42.2
47.5°	32.9
50°	22.3
52.5°	14.1
55°	10.6
57.5°	8.2
60°	5.9
62.5°	4.7
65°	3.5



TEST NUMBER: P744011
CATALOG NUMBER: LD4D20D010-EU4DR2015309050-4LBS1LI

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.3
70°		1.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)