

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744787

Luminaire Tested: LD4D20D010-EU4DR7020359050-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P744787
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D20D010-EU4DR7020359050-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 5000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2095.3 lumens
Efficiency: N/A
Efficacy: 90.7 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 23.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744787
CATALOG NUMBER: LD4D20D010-EU4DR7020359050-4LBDP1LI

Luminous Intensity Polar Plot

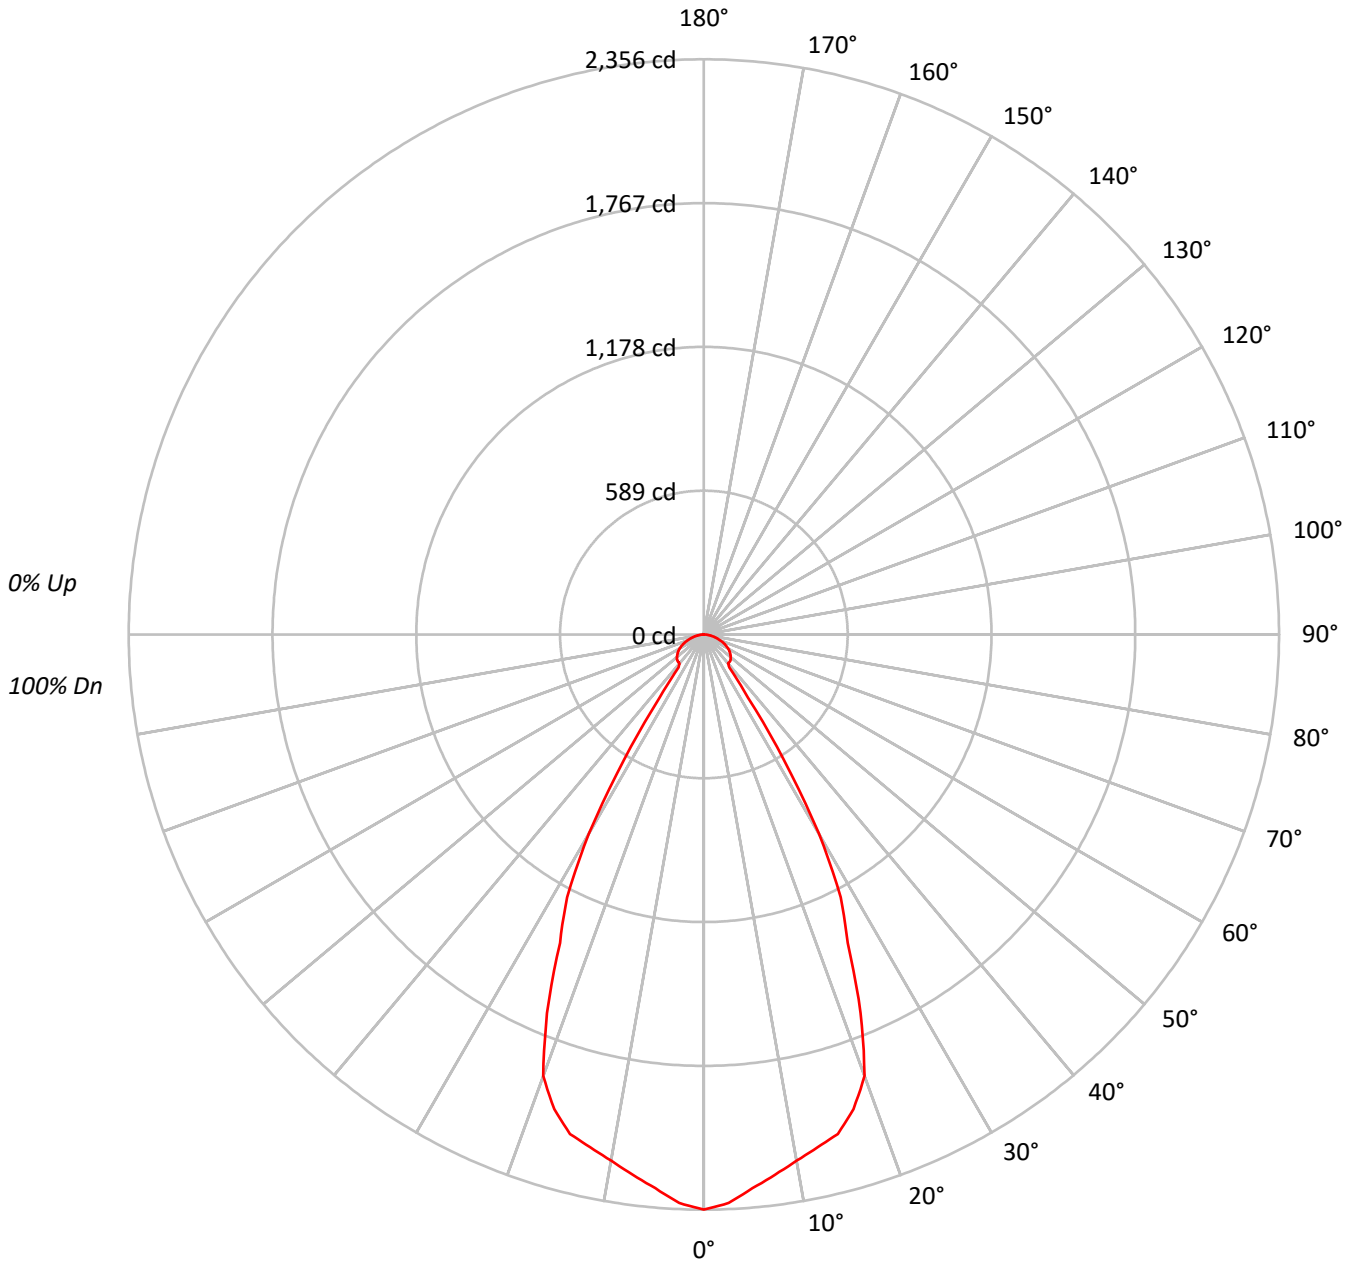



TEST NUMBER: P744787

CATALOG NUMBER: LD4D20D010-EU4DR7020359050-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	257375
5°	249737
10°	242773
15°	239589
20°	223721
25°	168079
30°	118821
35°	42082
40°	22136
45°	23564
50°	24409
55°	24859
60°	25021
65°	24483
70°	23129
75°	21403
80°	19002
85°	15420

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 25033 cd/sqm



TEST NUMBER: P744787

CATALOG NUMBER: LD4D20D010-EU4DR7020359050-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	214.8	10.3
10°-20°	589.1	28.1
20°-30°	648.8	31.0
30°-40°	247.9	11.8
40°-50°	117.0	5.6
50°-60°	116.4	5.6
60°-70°	93.2	4.4
70°-80°	53.6	2.6
80°-90°	14.6	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1452.7	69.3
0°-40°	1700.6	81.2
0°-60°	1934.0	92.3
0°-90°	2095.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2095.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2356	
5°	2277	215
15°	2118	589
25°	1394	649
35°	316	248
45°	152	117
55°	130	116
65°	95	93
75°	51	54
85°	12	15
90°	0	



TEST NUMBER: P744787

CATALOG NUMBER: LD4D20D010-EU4DR7020359050-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

0°	
0°	2355.6
2.5°	2331.1
5°	2277.0
7.5°	2231.8
10°	2188.2
12.5°	2151.3
15°	2118.1
17.5°	2037.9
20°	1924.1
22.5°	1678.7
25°	1394.2
27.5°	1213.6
30°	941.8
32.5°	608.3
35°	315.5
37.5°	170.5
40°	155.2
42.5°	154.0
45°	152.5
47.5°	149.2
50°	143.6
52.5°	137.3
55°	130.5
57.5°	123.1
60°	114.5
62.5°	104.8
65°	94.7
67.5°	83.5
70°	72.4
72.5°	61.2
75°	50.7
77.5°	39.9
80°	30.2
82.5°	21.3
85°	12.3
87.5°	4.9
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)