

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739685

Luminaire Tested: LD4D02D010-EU4DR700210IC9024-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P739685
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR700210IC9024-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 239.8 lumens
Efficiency: N/A
Efficacy: 47.0 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739685
CATALOG NUMBER: LD4D02D010-EU4DR700210IC9024-4LBDP1MW

Luminous Intensity Polar Plot

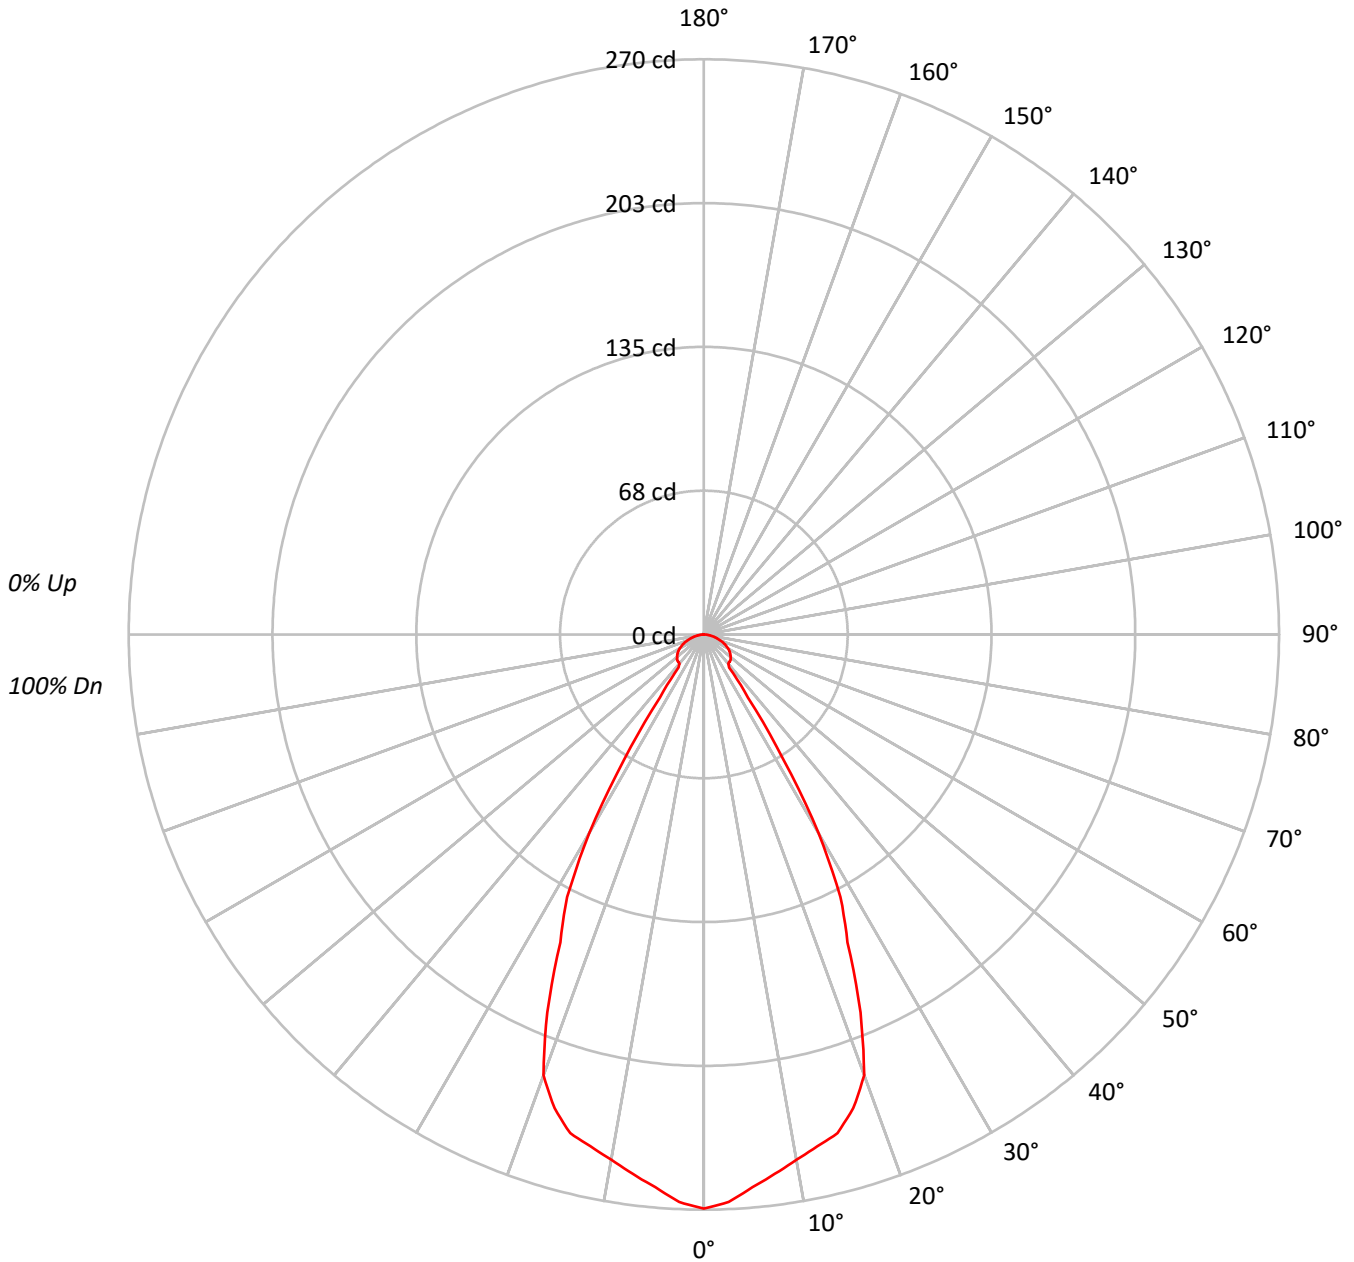



TEST NUMBER: P739685
 CATALOG NUMBER: LD4D02D010-EU4DR700210IC9024-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	29446
5°	28571
10°	27781
15°	27419
20°	25592
25°	19229
30°	13600
35°	4815
40°	2539
45°	2704
50°	2788
55°	2857
60°	2863
65°	2792
70°	2651
75°	2448
80°	2139
85°	1755

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 57.5°
 Luminance: 2867 cd/sqm



TEST NUMBER: P739685

CATALOG NUMBER: LD4D02D010-EU4DR700210IC9024-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	24.6	10.2
10°-20°	67.4	28.1
20°-30°	74.2	31.0
30°-40°	28.4	11.8
40°-50°	13.4	5.6
50°-60°	13.3	5.6
60°-70°	10.7	4.4
70°-80°	6.1	2.6
80°-90°	1.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	166.2	69.3
0°-40°	194.6	81.2
0°-60°	221.3	92.3
0°-90°	239.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	239.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	270	
5°	260	25
15°	242	67
25°	160	74
35°	36	28
45°	18	13
55°	15	13
65°	11	11
75°	6	6
85°	1	2
90°	0	



TEST NUMBER: P739685

CATALOG NUMBER: LD4D02D010-EU4DR700210IC9024-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	269.5
2.5°	266.7
5°	260.5
7.5°	255.4
10°	250.4
12.5°	246.1
15°	242.4
17.5°	233.2
20°	220.1
22.5°	192.1
25°	159.5
27.5°	138.9
30°	107.8
32.5°	69.6
35°	36.1
37.5°	19.5
40°	17.8
42.5°	17.6
45°	17.5
47.5°	17.1
50°	16.4
52.5°	15.7
55°	15.0
57.5°	14.1
60°	13.1
62.5°	12.0
65°	10.8
67.5°	9.6
70°	8.3
72.5°	7.0
75°	5.8
77.5°	4.6
80°	3.4
82.5°	2.4
85°	1.4
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)