

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P738842

Luminaire Tested: LD4D02D010-EU4DR150210IC9027-4LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P738842  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D02D010-EU4DR150210IC9027-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 358.8 lumens  
Efficiency: N/A  
Efficacy: 70.3 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 5.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P738842  
CATALOG NUMBER: LD4D02D010-EU4DR150210IC9027-4LBS1H

### Luminous Intensity Polar Plot

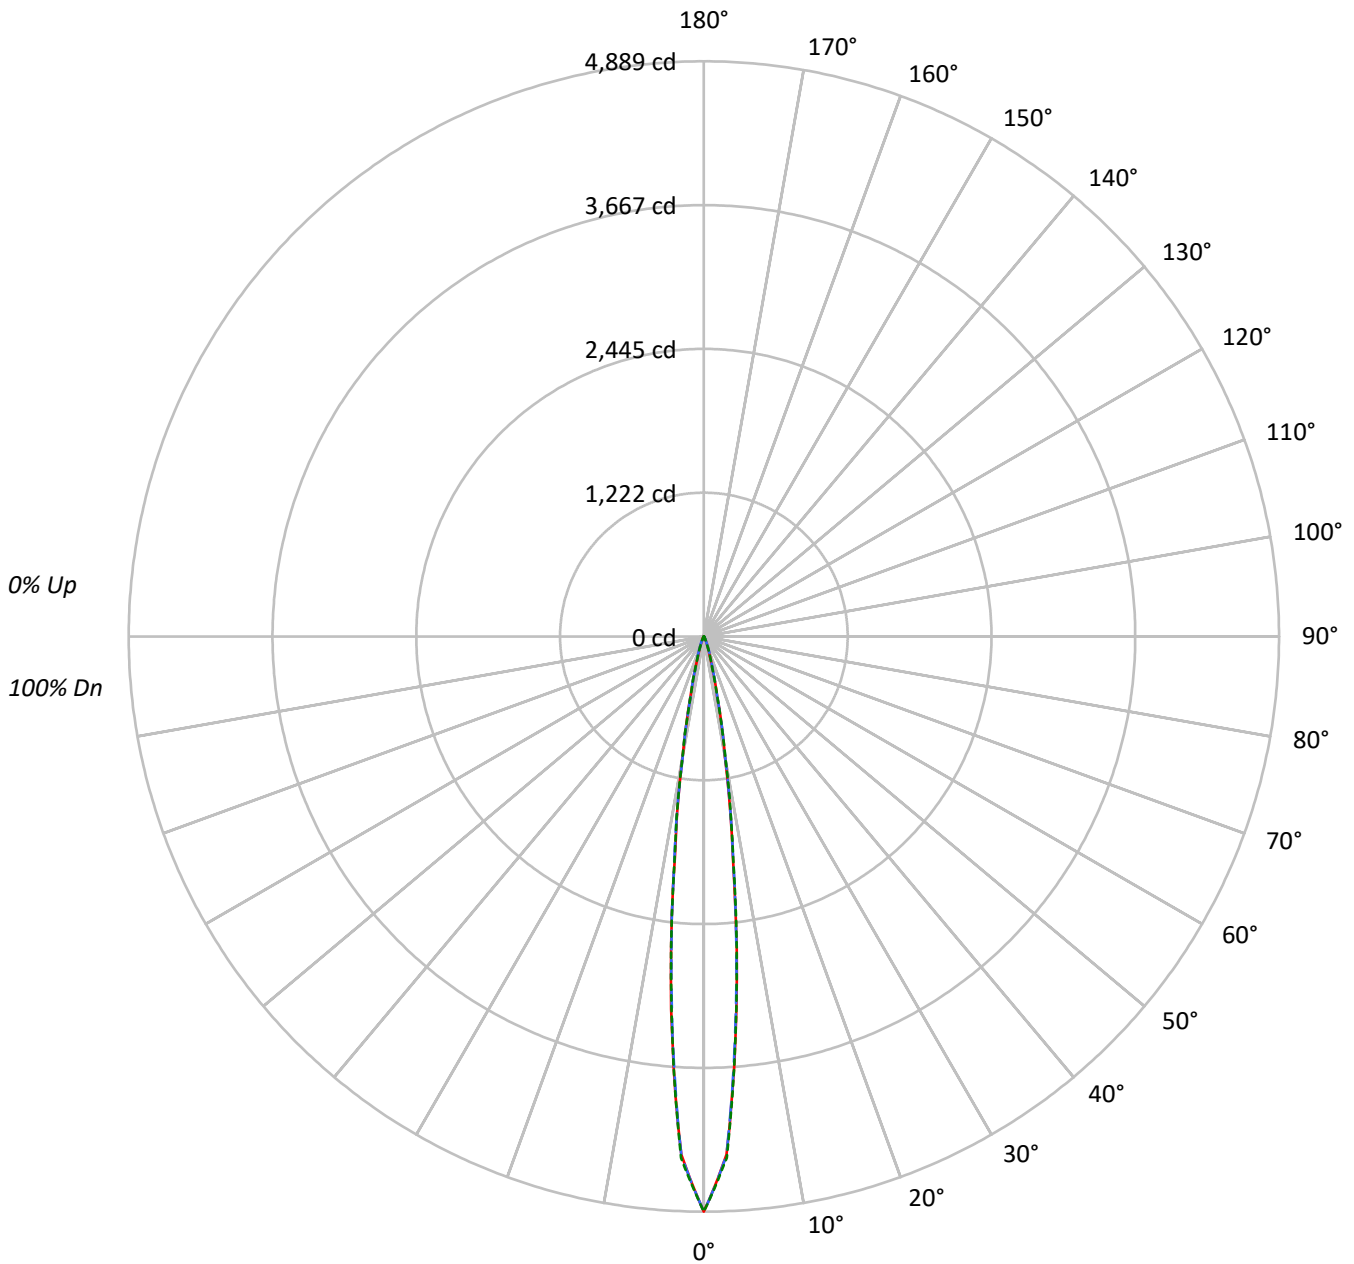



TEST NUMBER: P738842

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9027-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	99	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	99	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	550099	550099	550099
5°	323261	319074	321605
10°	96480	97152	98645
15°	23999	24468	23712
20°	7184	8313	7331
25°	2532	3225	2563
30°	929	1228	944
35°	465	523	450
40°	291	327	291
45°	217	231	217
50°	174	174	174
55°	146	146	146
60°	119	119	119
65°	86	86	86
70°	73	73	73
75°	45	45	60
80°	32	32	32
85°	17	17	17

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°

Vertical Angle: 45°

Luminance: 231 cd/sqm



TEST NUMBER: P738842

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9027-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	232.7	64.9
10°-20°	95.7	26.7
20°-30°	19.0	5.3
30°-40°	4.7	1.3
40°-50°	2.5	0.7
50°-60°	1.9	0.5
60°-70°	1.3	0.4
70°-80°	0.7	0.2
80°-90°	0.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	347.5	96.8
0°-40°	352.2	98.2
0°-60°	356.6	99.4
0°-90°	358.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	358.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	4889	4889	4889	4889	4889	
5°	3181	3148	3140	3161	3164	232
15°	276	282	282	277	273	95
25°	32	37	41	37	33	17
35°	6	7	7	7	6	4
45°	3	3	3	3	3	2
55°	2	2	2	2	2	2
65°	1	1	1	1	1	1
75°	1	1	1	1	1	1
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P738842

CATALOG NUMBER: LD4D02D010-EU4DR150210IC9027-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	4888.9	4888.9	4888.9	4888.9	4888.9
2.5°	4410.0	4413.7	4415.1	4419.5	4435.6
5°	3180.8	3148.1	3139.6	3161.4	3164.5
7.5°	1884.2	1890.8	1915.0	1920.4	1901.0
10°	1034.0	1042.5	1041.2	1048.7	1057.2
12.5°	528.8	522.2	520.1	528.6	516.8
15°	276.3	281.5	281.7	276.7	273.0
17.5°	148.6	154.6	164.5	156.5	144.0
20°	87.8	93.1	101.6	95.0	89.6
22.5°	54.2	58.6	64.6	59.4	55.1
25°	32.5	36.8	41.4	36.6	32.9
27.5°	19.2	23.0	25.9	22.8	19.0
30°	12.4	14.5	16.4	14.3	12.6
32.5°	8.7	9.5	10.3	9.5	8.7
35°	6.4	6.8	7.2	6.8	6.2
37.5°	5.0	5.4	5.6	5.2	4.8
40°	4.1	4.3	4.6	4.3	4.1
42.5°	3.5	3.7	3.7	3.7	3.5
45°	3.1	3.1	3.3	3.1	3.1
47.5°	2.7	2.7	2.9	2.7	2.7
50°	2.5	2.5	2.5	2.5	2.5
52.5°	2.3	2.3	2.3	2.3	2.3
55°	2.1	2.1	2.1	2.1	2.1
57.5°	1.9	1.9	1.9	1.9	1.9
60°	1.7	1.7	1.7	1.7	1.7
62.5°	1.4	1.4	1.4	1.4	1.4
65°	1.2	1.2	1.2	1.2	1.2
67.5°	1.2	1.2	1.2	1.2	1.2
70°	1.0	1.0	1.0	1.0	1.0
72.5°	0.8	0.8	0.8	0.8	0.8
75°	0.6	0.6	0.6	0.6	0.8
77.5°	0.6	0.6	0.6	0.6	0.6
80°	0.4	0.4	0.4	0.4	0.4
82.5°	0.4	0.4	0.4	0.4	0.4
85°	0.2	0.2	0.2	0.2	0.2
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)