

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739072

Luminaire Tested: LD4D02D010-EU4DR300210IC9027-4LBDP1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P739072
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR300210IC9027-4LBDP1H
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 329.6 lumens
Efficiency: N/A
Efficacy: 64.6 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739072

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBDP1H

Luminous Intensity Polar Plot

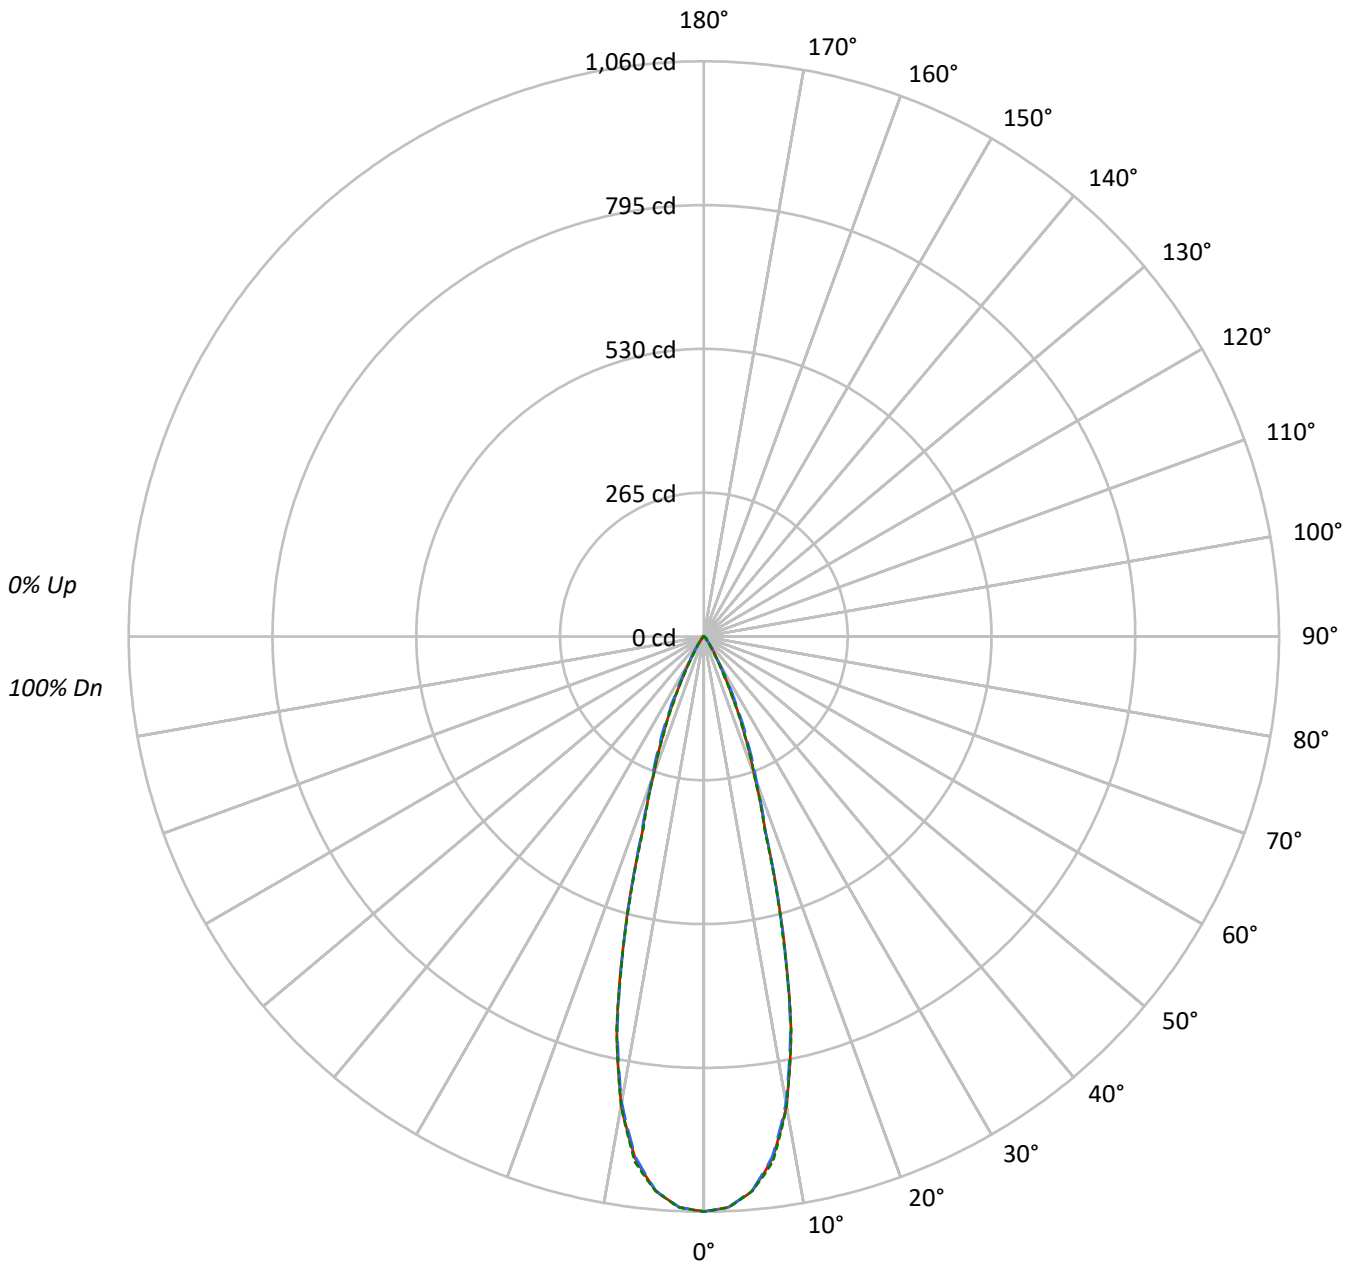



TEST NUMBER: P739072

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBDP1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	81121	81121	81121
5°	78795	78703	78795
10°	68242	67768	68234
15°	44527	44289	44067
20°	22140	22971	22115
25°	11157	12576	10929
30°	4463	4870	3889
35°	2074	1990	1663
40°	889	989	839
45°	628	779	639
50°	214	572	226
55°	120	240	133
60°	92	107	92
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 779 cd/sqm



TEST NUMBER: P739072

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBDP1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.2	28.3
10°-20°	150.1	45.5
20°-30°	64.9	19.7
30°-40°	14.8	4.5
40°-50°	5.1	1.5
50°-60°	1.2	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	308.1	93.5
0°-40°	322.9	98.0
0°-60°	329.2	99.9
0°-90°	329.6	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	329.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1060	1060	1060	1060	1060	
5°	1026	1024	1024	1026	1026	93
15°	562	555	559	557	556	150
25°	132	137	149	134	129	63
35°	22	23	21	21	18	15
45°	6	7	7	7	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P739072

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBDP1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1059.8	1059.8	1059.8	1059.8	1059.8
2.5°	1052.8	1052.1	1052.5	1053.0	1053.2
5°	1025.5	1024.5	1024.3	1026.4	1025.5
7.5°	970.4	969.0	966.9	971.7	976.2
10°	878.0	876.5	871.9	874.2	877.9
12.5°	741.8	736.8	736.6	743.9	742.9
15°	561.9	555.1	558.9	557.1	556.1
17.5°	377.9	375.3	380.3	378.8	372.2
20°	271.8	272.5	282.0	277.3	271.5
22.5°	198.4	200.8	212.1	199.7	195.2
25°	132.1	137.0	148.9	133.6	129.4
27.5°	81.2	83.5	95.5	80.2	77.9
30°	50.5	49.4	55.1	47.3	44.0
32.5°	33.2	31.7	33.5	30.1	27.5
35°	22.2	22.6	21.3	21.1	17.8
37.5°	13.9	15.9	14.0	15.0	11.5
40°	8.9	11.6	9.9	11.0	8.4
42.5°	7.3	8.9	8.2	8.7	7.5
45°	5.8	7.2	7.2	7.2	5.9
47.5°	3.2	4.8	6.2	4.9	3.4
50°	1.8	2.5	4.8	2.6	1.9
52.5°	1.3	1.4	3.3	1.4	1.3
55°	0.9	1.0	1.8	1.0	1.0
57.5°	0.7	0.8	0.9	0.8	0.7
60°	0.6	0.6	0.7	0.6	0.6
62.5°	0.4	0.4	0.5	0.4	0.4
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)