

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P739076

Luminaire Tested: LD4D02D010-EU4DR300210IC9027-4LBS1H

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P739076
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR300210IC9027-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 346.9 lumens
Efficiency: N/A
Efficacy: 68.0 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P739076
CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBS1H

Luminous Intensity Polar Plot

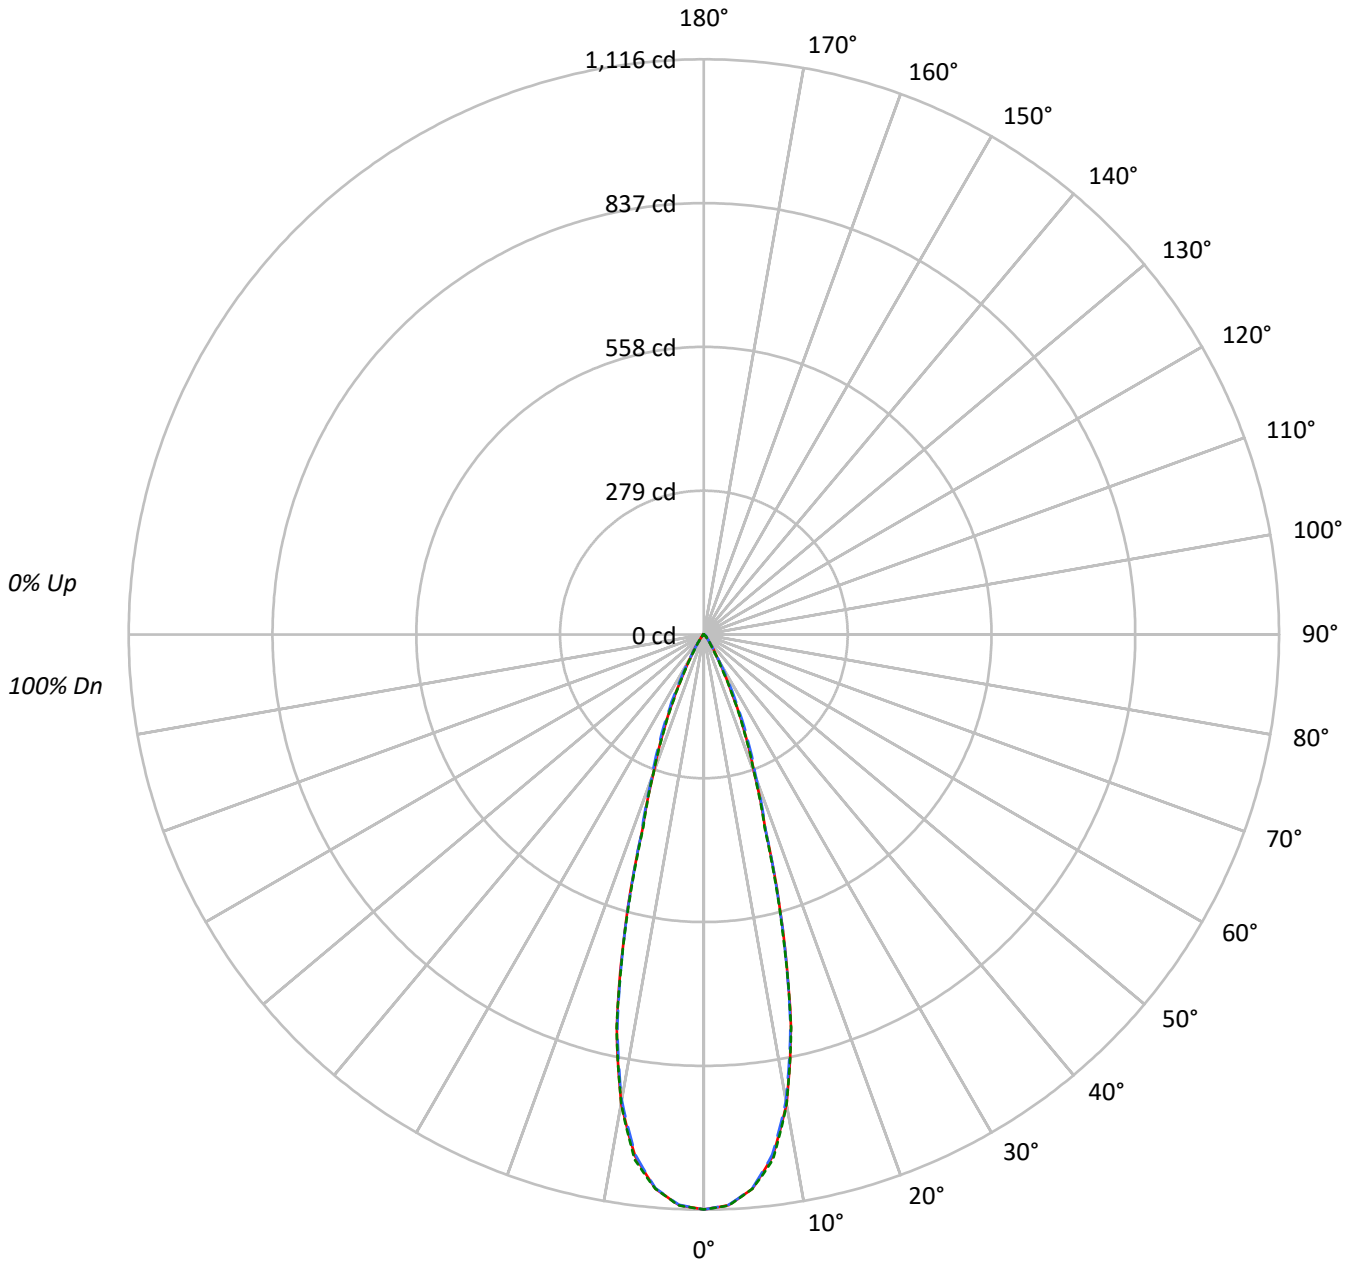



TEST NUMBER: P739076

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	85392	85392	85392
5°	82937	82844	82944
10°	71840	71335	71825
15°	46873	46619	46389
20°	23304	24176	23272
25°	11739	13243	11503
30°	4702	5117	4101
35°	2177	2084	1747
40°	939	1049	889
45°	660	823	671
50°	226	595	238
55°	133	254	133
60°	92	107	92
65°	54	54	54
70°	45	22	45
75°	0	30	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°

Vertical Angle: 45°

Luminance: 823 cd/sqm



TEST NUMBER: P739076

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.1	28.3
10°-20°	158.0	45.5
20°-30°	68.3	19.7
30°-40°	15.6	4.5
40°-50°	5.3	1.5
50°-60°	1.3	0.4
60°-70°	0.3	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	324.4	93.5
0°-40°	339.9	98.0
0°-60°	346.6	99.9
0°-90°	346.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	346.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1116	1116	1116	1116	1116	
5°	1079	1078	1078	1080	1080	98
15°	592	584	588	586	585	158
25°	139	144	157	141	136	67
35°	23	24	22	22	19	16
45°	6	8	8	8	6	4
55°	1	1	2	1	1	1
65°	0	0	0	0	0	0
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	0



TEST NUMBER: P739076

CATALOG NUMBER: LD4D02D010-EU4DR300210IC9027-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1115.6	1115.6	1115.6	1115.6	1115.6
2.5°	1108.2	1107.5	1107.9	1108.4	1108.7
5°	1079.4	1078.4	1078.2	1080.5	1079.5
7.5°	1021.5	1020.0	1017.7	1022.8	1027.6
10°	924.3	922.6	917.8	920.2	924.1
12.5°	780.8	775.5	775.4	783.1	782.0
15°	591.5	584.4	588.3	586.4	585.4
17.5°	397.7	395.0	400.3	398.7	391.8
20°	286.1	286.8	296.8	291.8	285.7
22.5°	208.8	211.4	223.3	210.3	205.5
25°	139.0	144.3	156.8	140.6	136.2
27.5°	85.5	87.9	100.6	84.4	82.0
30°	53.2	52.0	57.9	49.7	46.4
32.5°	34.9	33.3	35.3	31.7	28.9
35°	23.3	23.8	22.3	22.2	18.7
37.5°	14.6	16.8	14.8	15.8	12.0
40°	9.4	12.1	10.5	11.6	8.9
42.5°	7.7	9.3	8.6	9.2	7.9
45°	6.1	7.6	7.6	7.6	6.2
47.5°	3.4	5.1	6.5	5.2	3.6
50°	1.9	2.6	5.0	2.7	2.0
52.5°	1.3	1.5	3.4	1.5	1.4
55°	1.0	1.0	1.9	1.1	1.0
57.5°	0.7	0.8	1.0	0.8	0.7
60°	0.6	0.6	0.7	0.6	0.6
62.5°	0.5	0.5	0.5	0.5	0.5
65°	0.3	0.3	0.3	0.3	0.3
67.5°	0.2	0.2	0.2	0.2	0.2
70°	0.2	0.1	0.1	0.1	0.2
72.5°	0.1	0.1	0.1	0.1	0.1
75°	0.0	0.0	0.1	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)