

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P738931

Luminaire Tested: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P738931
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D02D010-EU4DR200210IC9030-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 340.4 lumens
Efficiency: N/A
Efficacy: 66.7 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 5.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P738931

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

Luminous Intensity Polar Plot

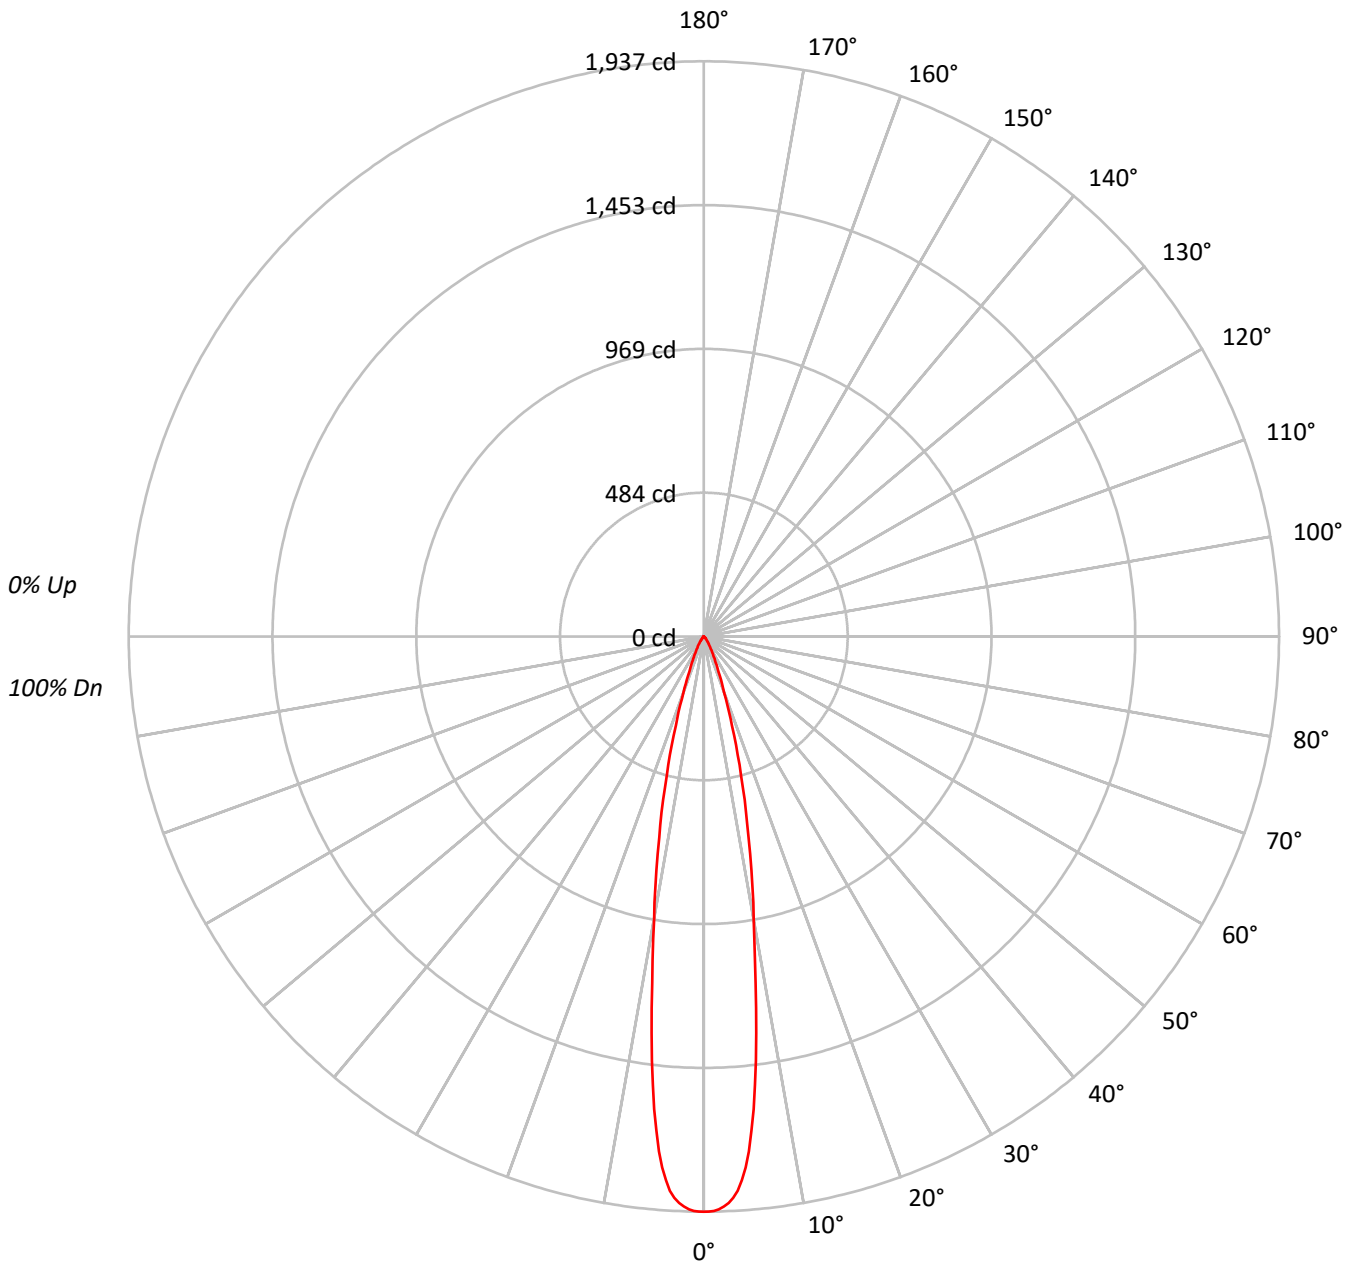



TEST NUMBER: P738931

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	95	95	94															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	92	92	91															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	89	89	88															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	86	86	85															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	84	84	83															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	82	82	81															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	80	80	79															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	78	78	77															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	76	76	75															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	211671
5°	190961
10°	107174
15°	54476
20°	23069
25°	10645
30°	5640
35°	3041
40°	1626
45°	958
50°	561
55°	305
60°	197
65°	129
70°	64
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 958 cd/sqm



TEST NUMBER: P738931

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	137.9	40.5
10°-20°	135.8	39.9
20°-30°	44.4	13.0
30°-40°	15.1	4.4
40°-50°	5.1	1.5
50°-60°	1.6	0.5
60°-70°	0.5	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	318.1	93.5
0°-40°	333.2	97.9
0°-60°	339.9	99.8
0°-90°	340.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	340.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1937	
5°	1741	138
15°	482	136
25°	88	44
35°	23	15
45°	6	5
55°	2	2
65°	0	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P738931

CATALOG NUMBER: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1937.3
0.5°	1937.3
1°	1934.8
1.5°	1930.0
2°	1921.2
2.5°	1909.5
3°	1892.9
3.5°	1869.8
4°	1835.5
4.5°	1793.7
5°	1741.1
5.5°	1671.9
6°	1601.0
6.5°	1519.8
7°	1440.3
7.5°	1347.1
8°	1264.0
8.5°	1180.3
9°	1103.0
9.5°	1032.1
10°	966.0
12.5°	693.7
15°	481.6
17.5°	314.7
20°	198.4
22.5°	128.5
25°	88.3
27.5°	62.1
30°	44.7
32.5°	32.1
35°	22.8
37.5°	15.9
40°	11.4
42.5°	8.3
45°	6.2
47.5°	4.8
50°	3.3
52.5°	2.1
55°	1.6
57.5°	1.2
60°	0.9
62.5°	0.7
65°	0.5



TEST NUMBER: P738931
CATALOG NUMBER: LD4D02D010-EU4DR200210IC9030-4LBDP1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



67.5°		0.3
70°		0.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)