

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744800

Luminaire Tested: LD4D25D010-EU4DR1515309024-4LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744800  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR1515309024-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2204.5 lumens  
Efficiency: N/A  
Efficacy: 87.8 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744800  
CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBDP1LI

### Luminous Intensity Polar Plot

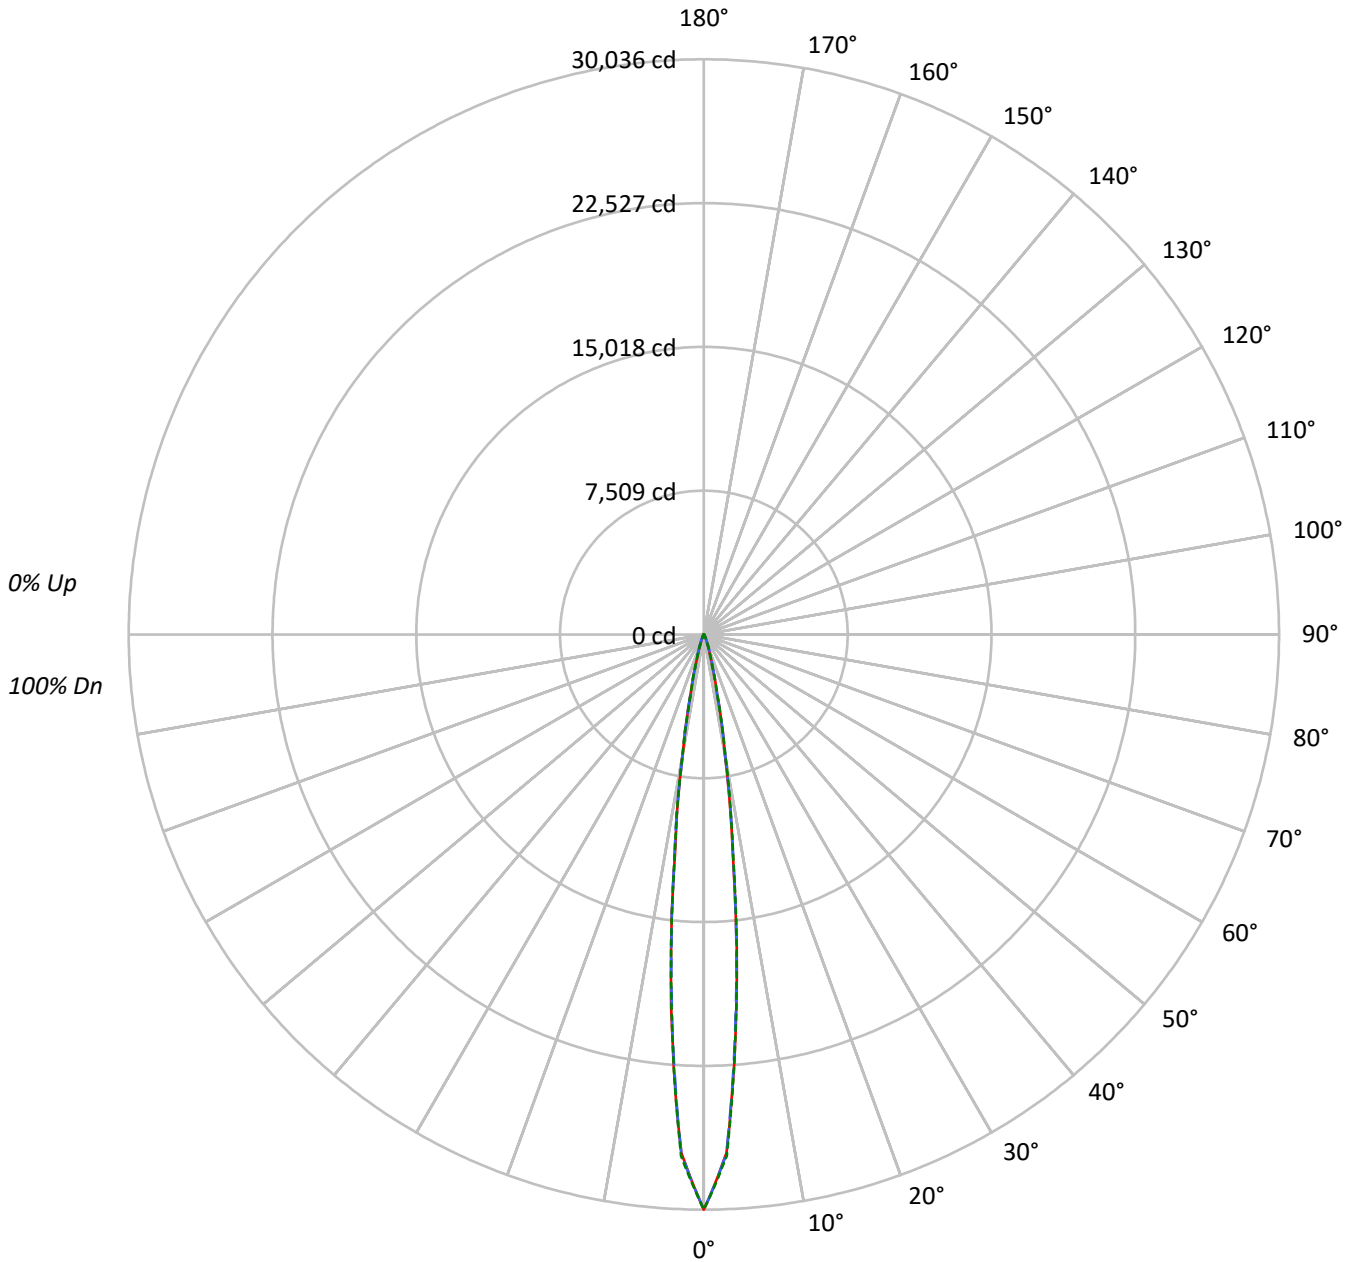



TEST NUMBER: P744800

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98																			
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96																			
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94																			
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93																			
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92																			
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90																			
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89																			
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88																			
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87																			
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3379627	3379627	3379627
5°	1986032	1960310	1975818
10°	592736	596889	606023
15°	147439	150306	145668
20°	44111	51082	45052
25°	15549	19810	15752
30°	5713	7518	5811
35°	2861	3232	2767
40°	1804	1988	1804
45°	1337	1421	1337
50°	1064	1064	1064
55°	884	884	884
60°	716	716	716
65°	542	542	542
70°	468	468	468
75°	287	287	385
80°	197	197	197
85°	108	108	108

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 45°  
 Luminance: 1421 cd/sqm



TEST NUMBER: P744800

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1429.8	64.9
10°-20°	588.1	26.7
20°-30°	116.8	5.3
30°-40°	29.2	1.3
40°-50°	15.3	0.7
50°-60°	11.4	0.5
60°-70°	8.0	0.4
70°-80°	4.6	0.2
80°-90°	1.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2134.7	96.8
0°-40°	2163.8	98.2
0°-60°	2190.5	99.4
0°-90°	2204.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2204.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	30036	30036	30036	30036	30036	
5°	19542	19341	19289	19422	19442	1427
15°	1698	1729	1730	1700	1677	582
25°	200	226	254	225	202	105
35°	39	42	44	42	38	27
45°	19	19	20	19	19	15
55°	13	13	13	13	13	11
65°	8	8	8	8	8	8
75°	4	4	4	4	5	5
85°	1	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P744800

CATALOG NUMBER: LD4D25D010-EU4DR1515309024-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	30035.8	30035.8	30035.8	30035.8	30035.8
2.5°	27093.5	27116.4	27125.3	27152.0	27251.2
5°	19542.0	19341.1	19288.9	19422.4	19441.5
7.5°	11575.9	11616.6	11765.4	11798.4	11678.9
10°	6352.5	6404.6	6397.0	6442.8	6494.9
12.5°	3248.7	3208.0	3195.3	3247.5	3175.0
15°	1697.5	1729.3	1730.5	1700.0	1677.1
17.5°	912.9	949.8	1010.9	961.3	885.0
20°	539.1	572.2	624.3	583.6	550.6
22.5°	333.1	359.8	396.7	364.9	338.2
25°	199.6	226.3	254.3	225.1	202.2
27.5°	118.3	141.1	158.9	139.9	117.0
30°	76.3	89.0	100.4	87.7	77.6
32.5°	53.4	58.5	63.6	58.5	53.4
35°	39.4	42.0	44.5	42.0	38.1
37.5°	30.5	33.1	34.3	31.8	29.2
40°	25.4	26.7	28.0	26.7	25.4
42.5°	21.6	22.9	22.9	22.9	21.6
45°	19.1	19.1	20.3	19.1	19.1
47.5°	16.5	16.5	17.8	16.5	16.5
50°	15.3	15.3	15.3	15.3	15.3
52.5°	14.0	14.0	14.0	14.0	14.0
55°	12.7	12.7	12.7	12.7	12.7
57.5°	11.4	11.4	11.4	11.4	11.4
60°	10.2	10.2	10.2	10.2	10.2
62.5°	8.9	8.9	8.9	8.9	8.9
65°	7.6	7.6	7.6	7.6	7.6
67.5°	7.6	7.6	7.6	7.6	7.6
70°	6.4	6.4	6.4	6.4	6.4
72.5°	5.1	5.1	5.1	5.1	5.1
75°	3.8	3.8	3.8	3.8	5.1
77.5°	3.8	3.8	3.8	3.8	3.8
80°	2.5	2.5	2.5	2.5	2.5
82.5°	2.5	2.5	2.5	2.5	2.5
85°	1.3	1.3	1.3	1.3	1.3
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)