

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744881

Luminaire Tested: LD4D25D010-EU4DR2015309024-4LBS1H

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744881
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR2015309024-4LBS1H
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2318.8 lumens
Efficiency: N/A
Efficacy: 92.4 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744881
CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBS1H

Luminous Intensity Polar Plot

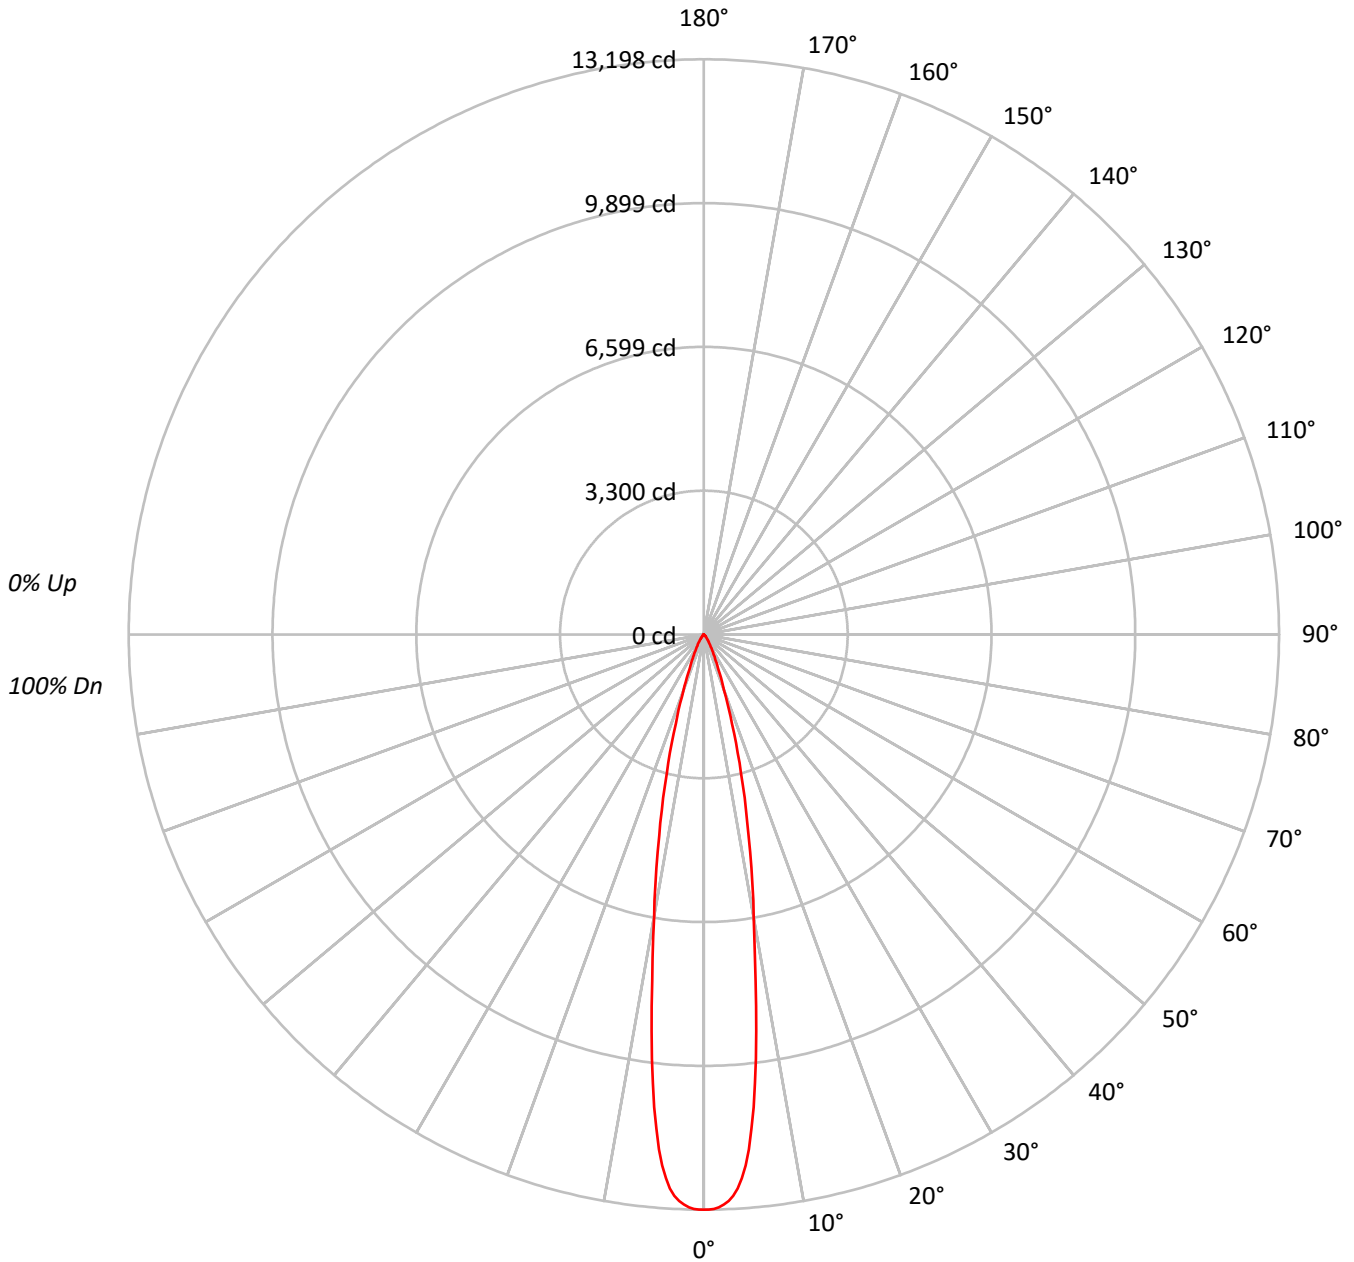



TEST NUMBER: P744881

CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBS1H

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97		
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94		
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91		
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88		
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85		
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83		
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81		
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79		
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77		
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1442045
5°	1300991
10°	730193
15°	371164
20°	157154
25°	72538
30°	38404
35°	20688
40°	11068
45°	6536
50°	3791
55°	2019
60°	1289
65°	905
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6536 cd/sqm



TEST NUMBER: P744881

CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBS1H

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	939.7	40.5
10°-20°	925.3	39.9
20°-30°	302.3	13.0
30°-40°	102.9	4.4
40°-50°	34.6	1.5
50°-60°	10.4	0.4
60°-70°	3.5	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2167.3	93.5
0°-40°	2270.2	97.9
0°-60°	2315.2	99.8
0°-90°	2318.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2318.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13198	
5°	11862	940
15°	3281	925
25°	602	302
35°	155	103
45°	42	35
55°	11	10
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744881

CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBS1H

CANDELA DISTRIBUTION (FULL):

	0°
0°	13198.2
0.5°	13198.2
1°	13181.8
1.5°	13148.9
2°	13088.9
2.5°	13009.0
3°	12896.2
3.5°	12738.7
4°	12504.8
4.5°	12220.4
5°	11861.9
5.5°	11390.7
6°	10907.6
6.5°	10354.1
7°	9812.3
7.5°	9177.6
8°	8611.2
8.5°	8041.2
9°	7514.6
9.5°	7031.6
10°	6581.5
12.5°	4725.7
15°	3281.3
17.5°	2143.7
20°	1351.6
22.5°	875.6
25°	601.7
27.5°	423.1
30°	304.4
32.5°	218.6
35°	155.1
37.5°	108.1
40°	77.6
42.5°	56.4
45°	42.3
47.5°	32.9
50°	22.3
52.5°	14.1
55°	10.6
57.5°	8.2
60°	5.9
62.5°	4.7
65°	3.5



TEST NUMBER: P744881
CATALOG NUMBER: LD4D25D010-EU4DR2015309024-4LBS1H

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.4
70°		1.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)