

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745585

Luminaire Tested: LD4D25D010-EU4DR6520359024-4LBS1MW

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745585  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-147)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR6520359024-4LBS1MW  
Description: 4 INCH ROUND SHALLOW MATTE WHITE TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2400K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1822.0 lumens  
Efficiency: N/A  
Efficacy: 72.6 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.96  
Luminous Opening: Circular (Dia: 0.48' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745585  
CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBS1MW

### Luminous Intensity Polar Plot

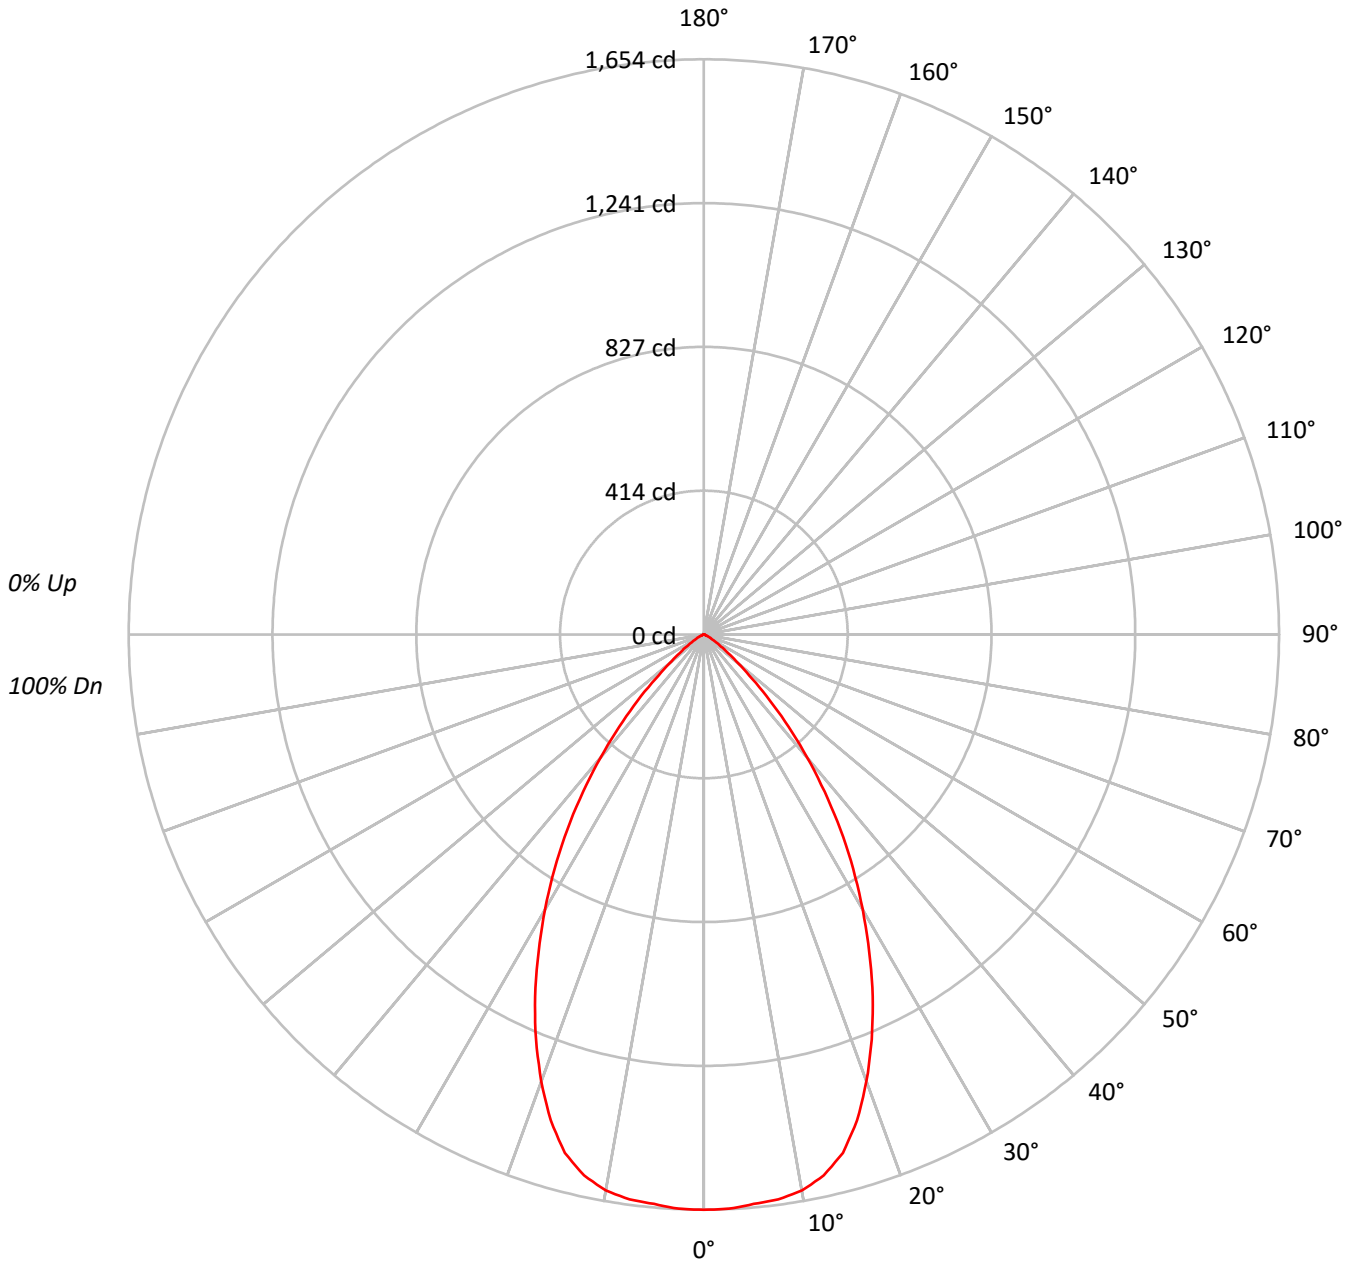



TEST NUMBER: P745585  
 CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBS1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	113	110	107	105	111	108	105	103	104	102	100	100	99	97	97	95	94	93			93																
2	107	102	97	94	105	100	96	92	97	93	90	94	91	88	91	89	87	85			85																
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	85	82	80	78			78																
4	95	87	81	76	93	86	80	76	84	79	75	82	77	74	80	76	73	72			72																
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	75	71	68	66			66																
6	85	75	69	64	83	74	68	64	73	67	63	71	67	63	70	66	62	61			61																
7	80	70	64	59	79	69	63	59	68	63	59	67	62	58	66	61	58	56			56																
8	76	66	59	55	75	65	59	55	64	58	54	63	58	54	62	57	54	52			52																
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49			49																
10	68	58	52	47	67	57	51	47	57	51	47	56	51	47	55	50	47	46			46																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	96618
5°	96377
10°	96293
15°	93326
20°	84962
25°	74037
30°	61579
35°	48789
40°	35216
45°	22243
50°	11603
55°	6171
60°	3236
65°	1783
70°	751
75°	835
80°	572
85°	469

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 22243 cd/sqm



TEST NUMBER: P745585

CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBS1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	156.4	8.6
10°-20°	428.4	23.5
20°-30°	523.7	28.7
30°-40°	424.9	23.3
40°-50°	211.7	11.6
50°-60°	59.1	3.2
60°-70°	13.4	0.7
70°-80°	3.5	0.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1108.5	60.8
0°-40°	1533.4	84.2
0°-60°	1804.2	99.0
0°-90°	1822.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1822.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1654	
5°	1644	156
15°	1544	428
25°	1149	524
35°	684	425
45°	269	212
55°	61	59
65°	13	13
75°	4	3
85°	1	1
90°	0	



TEST NUMBER: P745585  
CATALOG NUMBER: LD4D25D010-EU4DR6520359024-4LBS1MW

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1654.3
2.5°	1653.1
5°	1643.9
7.5°	1638.5
10°	1623.7
12.5°	1593.5
15°	1543.5
17.5°	1465.2
20°	1367.0
22.5°	1261.0
25°	1148.9
27.5°	1029.1
30°	913.1
32.5°	798.6
35°	684.3
37.5°	570.3
40°	461.9
42.5°	360.3
45°	269.3
47.5°	187.7
50°	127.7
52.5°	88.0
55°	60.6
57.5°	40.9
60°	27.7
62.5°	19.2
65°	12.9
67.5°	6.6
70°	4.4
72.5°	4.1
75°	3.7
77.5°	2.4
80°	1.7
82.5°	1.2
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)