

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745513

Luminaire Tested: LD4D25D010-EU4DR6020359027-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P745513
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR6020359027-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 60° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1822.4 lumens
Efficiency: N/A
Efficacy: 72.6 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745513
CATALOG NUMBER: LD4D25D010-EU4DR6020359027-4LBDP1B

Luminous Intensity Polar Plot

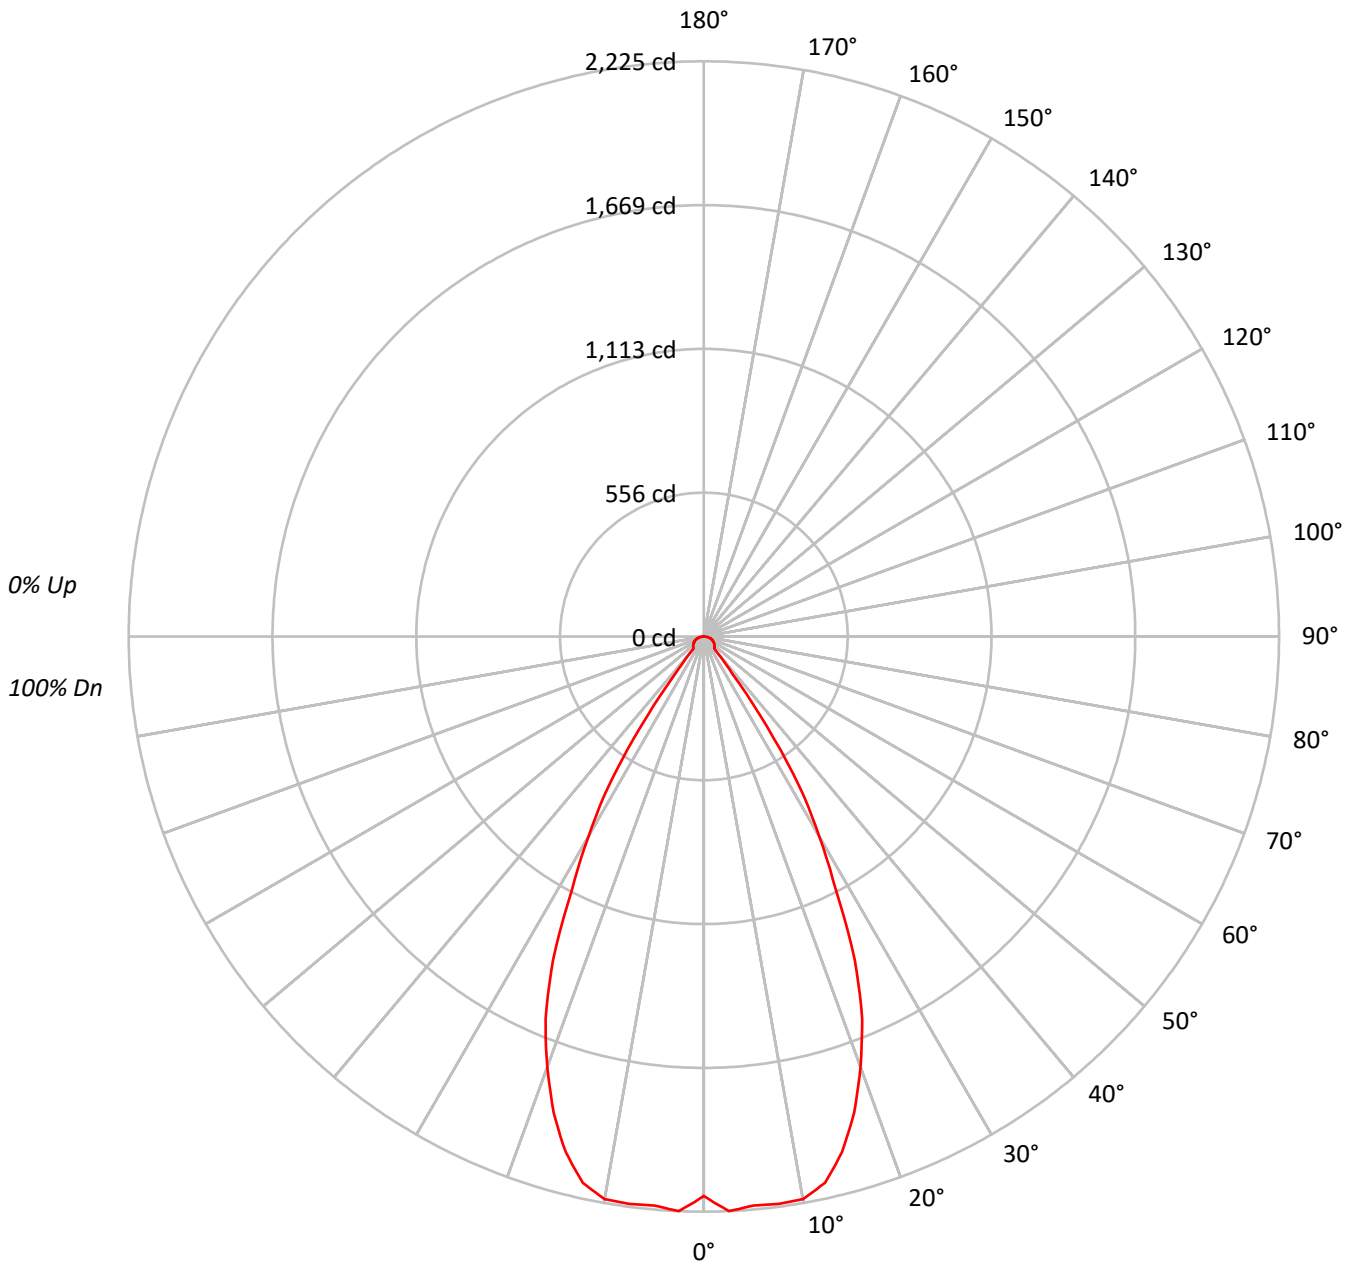



TEST NUMBER: P745513

CATALOG NUMBER: LD4D25D010-EU4DR6020359027-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	236473
5°	242290
10°	245213
15°	233594
20°	205966
25°	166584
30°	112689
35°	56474
40°	9157
45°	8962
50°	9145
55°	9277
60°	9549
65°	9773
70°	9999
75°	10089
80°	9753
85°	8149

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 75°
 Luminance: 10089 cd/sqm



TEST NUMBER: P745513

CATALOG NUMBER: LD4D25D010-EU4DR6020359027-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	211.1	11.6
10°-20°	571.2	31.3
20°-30°	614.6	33.7
30°-40°	267.2	14.7
40°-50°	44.8	2.5
50°-60°	43.6	2.4
60°-70°	37.4	2.1
70°-80°	25.0	1.4
80°-90°	7.5	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1397.0	76.7
0°-40°	1664.1	91.3
0°-60°	1752.6	96.2
0°-90°	1822.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1822.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2164	
5°	2209	211
15°	2065	571
25°	1382	615
35°	423	267
45°	58	45
55°	49	44
65°	38	37
75°	24	25
85°	6	7
90°	0	



TEST NUMBER: P745513

CATALOG NUMBER: LD4D25D010-EU4DR6020359027-4LBDP1B

CANDELA DISTRIBUTION (FULL):

0°	
0°	2164.3
2.5°	2225.2
5°	2209.1
7.5°	2214.2
10°	2210.2
12.5°	2164.6
15°	2065.1
17.5°	1931.6
20°	1771.4
22.5°	1599.9
25°	1381.8
27.5°	1105.3
30°	893.2
32.5°	688.4
35°	423.4
37.5°	181.1
40°	64.2
42.5°	59.1
45°	58.0
47.5°	56.0
50°	53.8
52.5°	51.3
55°	48.7
57.5°	46.2
60°	43.7
62.5°	40.9
65°	37.8
67.5°	34.7
70°	31.3
72.5°	27.6
75°	23.9
77.5°	19.7
80°	15.5
82.5°	11.0
85°	6.5
87.5°	2.2
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)