

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744905

Luminaire Tested: LD4D25D010-EU4DR2015309030-4LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744905
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR2015309030-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2327.1 lumens
Efficiency: N/A
Efficacy: 92.7 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744905

CATALOG NUMBER: LD4D25D010-EU4DR2015309030-4LBDP1MW

Luminous Intensity Polar Plot

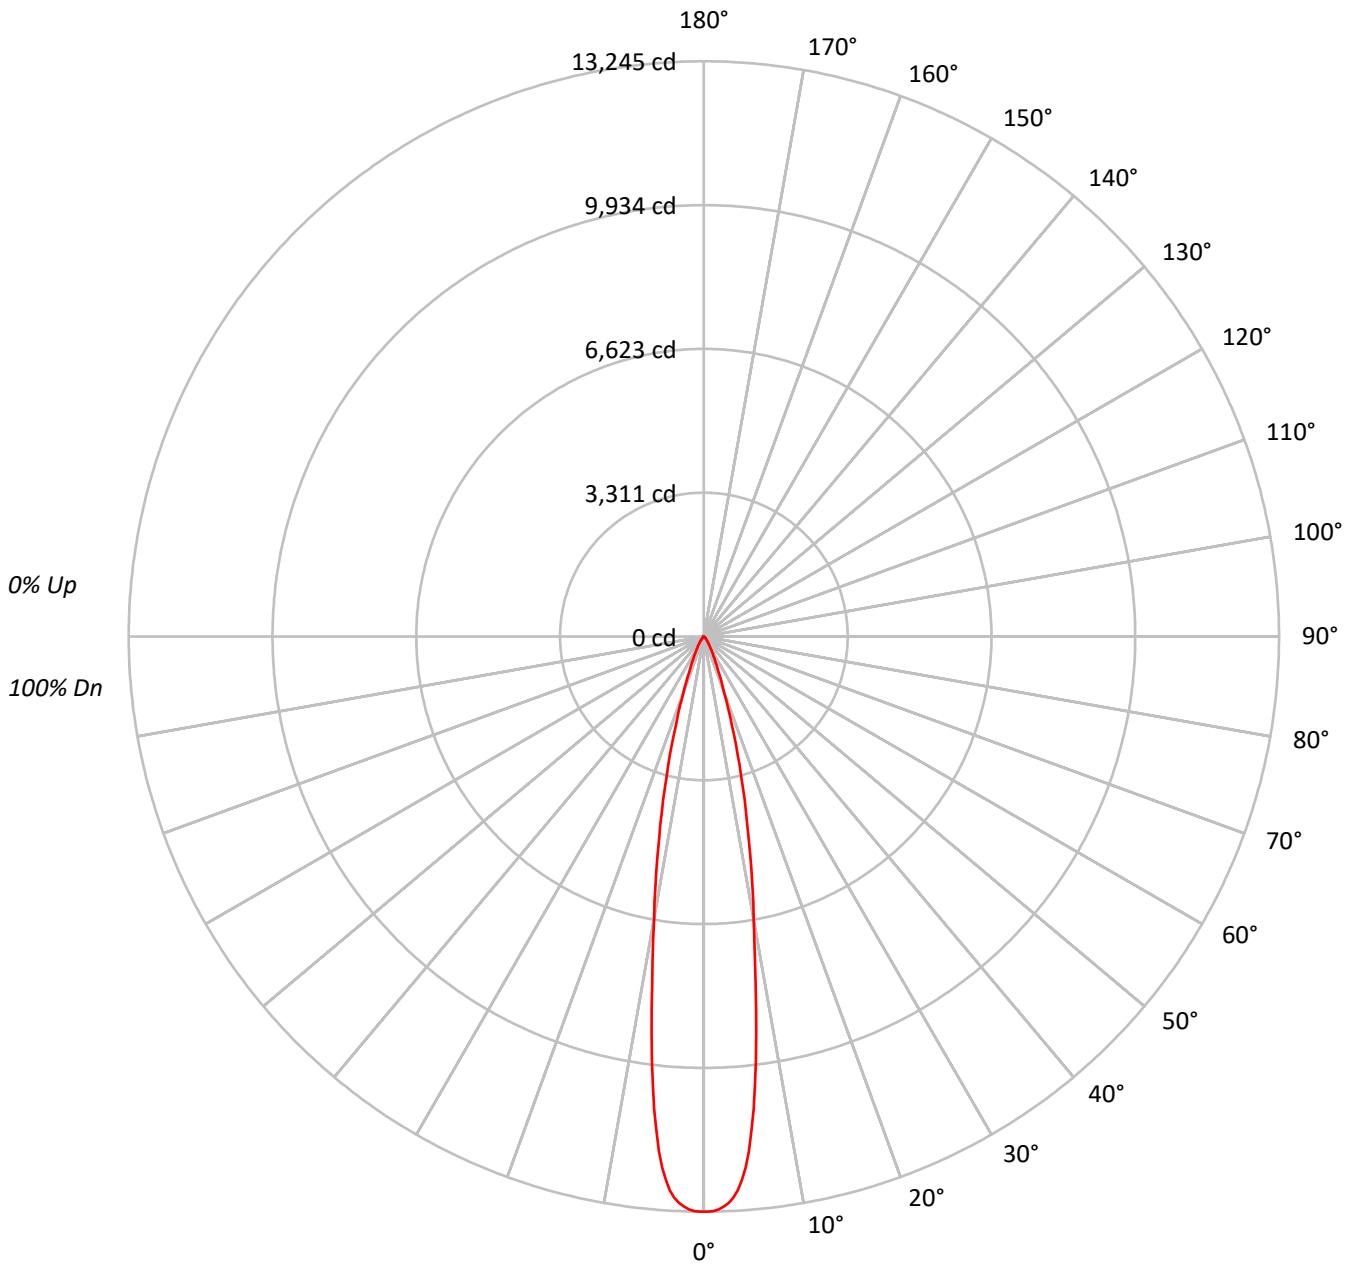



TEST NUMBER: P744905

CATALOG NUMBER: LD4D25D010-EU4DR2015309030-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1447181
5°	1305630
10°	732789
15°	372488
20°	157713
25°	72804
30°	38543
35°	20768
40°	11097
45°	6567
50°	3808
55°	2019
60°	1289
65°	905
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6567 cd/sqm



TEST NUMBER: P744905

CATALOG NUMBER: LD4D25D010-EU4DR2015309030-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	943.0	40.5
10°-20°	928.6	39.9
20°-30°	303.4	13.0
30°-40°	103.3	4.4
40°-50°	34.7	1.5
50°-60°	10.5	0.4
60°-70°	3.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2175.0	93.5
0°-40°	2278.3	97.9
0°-60°	2323.5	99.8
0°-90°	2327.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2327.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13245	
5°	11904	943
15°	3293	929
25°	604	303
35°	156	103
45°	42	35
55°	11	10
65°	4	3
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744905

CATALOG NUMBER: LD4D25D010-EU4DR2015309030-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	13245.2
0.5°	13245.2
1°	13228.7
1.5°	13195.6
2°	13135.5
2.5°	13055.3
3°	12942.1
3.5°	12784.0
4°	12549.3
4.5°	12263.9
5°	11904.2
5.5°	11431.2
6°	10946.4
6.5°	10390.9
7°	9847.2
7.5°	9210.3
8°	8641.8
8.5°	8069.8
9°	7541.4
9.5°	7056.6
10°	6604.9
12.5°	4742.6
15°	3293.0
17.5°	2151.3
20°	1356.4
22.5°	878.7
25°	603.9
27.5°	424.6
30°	305.5
32.5°	219.4
35°	155.7
37.5°	108.5
40°	77.8
42.5°	56.6
45°	42.5
47.5°	33.0
50°	22.4
52.5°	14.2
55°	10.6
57.5°	8.3
60°	5.9
62.5°	4.7
65°	3.5



TEST NUMBER: P744905
CATALOG NUMBER: LD4D25D010-EU4DR2015309030-4LBDP1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.4
70°		1.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)