

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745529

Luminaire Tested: LD4D25D010-EU4DR6020359030-4LBDP1MW

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745529  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR6020359030-4LBDP1MW  
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2164.0 lumens  
Efficiency: N/A  
Efficacy: 86.2 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745529

CATALOG NUMBER: LD4D25D010-EU4DR6020359030-4LBDP1MW

### Luminous Intensity Polar Plot

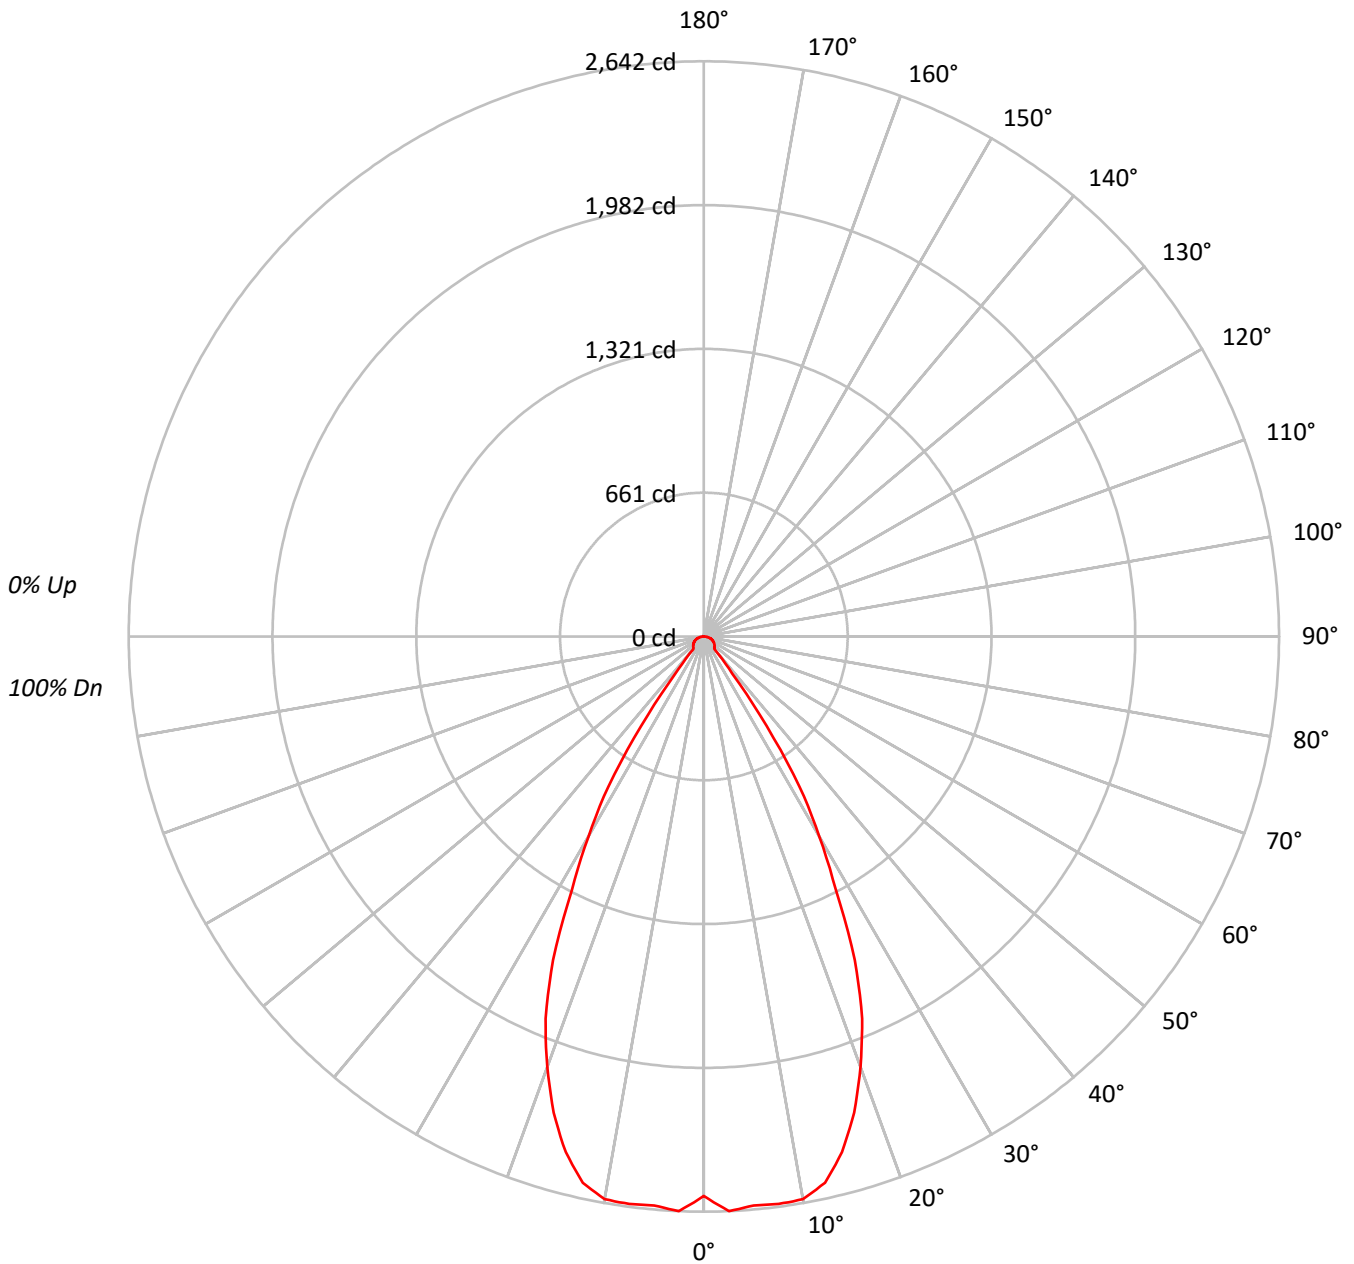



TEST NUMBER: P745529

CATALOG NUMBER: LD4D25D010-EU4DR6020359030-4LBDP1MW

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86	86	86	86
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80	80	80	80
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75	75	75	75
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70	70	70	70
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66	66	66	66
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62	62	62	62
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59	59	59	59
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55	55	55	55
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53	53	53	53

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	280800
5°	287708
10°	291190
15°	277392
20°	244580
25°	197820
30°	133809
35°	67052
40°	10883
45°	10646
50°	10862
55°	11029
60°	11341
65°	11582
70°	11852
75°	11989
80°	11577
85°	9653

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 11989 cd/sqm



TEST NUMBER: P745529

CATALOG NUMBER: LD4D25D010-EU4DR6020359030-4LBDP1MW

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	250.7	11.6
10°-20°	678.3	31.3
20°-30°	729.8	33.7
30°-40°	317.2	14.7
40°-50°	53.3	2.5
50°-60°	51.8	2.4
60°-70°	44.3	2.0
70°-80°	29.6	1.4
80°-90°	8.9	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1658.9	76.7
0°-40°	1976.1	91.3
0°-60°	2081.2	96.2
0°-90°	2164.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2164.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2570	
5°	2623	251
15°	2452	678
25°	1641	730
35°	503	317
45°	69	53
55°	58	52
65°	45	44
75°	28	30
85°	8	9
90°	0	



TEST NUMBER: P745529

CATALOG NUMBER: LD4D25D010-EU4DR6020359030-4LBDP1MW

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2570.0
2.5°	2642.3
5°	2623.2
7.5°	2629.2
10°	2624.6
12.5°	2570.4
15°	2452.3
17.5°	2293.8
20°	2103.5
22.5°	1899.8
25°	1640.9
27.5°	1312.5
30°	1060.6
32.5°	817.4
35°	502.7
37.5°	215.1
40°	76.3
42.5°	70.2
45°	68.9
47.5°	66.6
50°	63.9
52.5°	60.8
55°	57.9
57.5°	54.8
60°	51.9
62.5°	48.5
65°	44.8
67.5°	41.1
70°	37.1
72.5°	32.8
75°	28.4
77.5°	23.4
80°	18.4
82.5°	13.1
85°	7.7
87.5°	2.7
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)