

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745605

Luminaire Tested: LD4D25D010-EU4DR6520359030-4LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745605  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR6520359030-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 65° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2087.9 lumens  
Efficiency: N/A  
Efficacy: 83.2 lumens/watt  
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745605  
CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1H

### Luminous Intensity Polar Plot

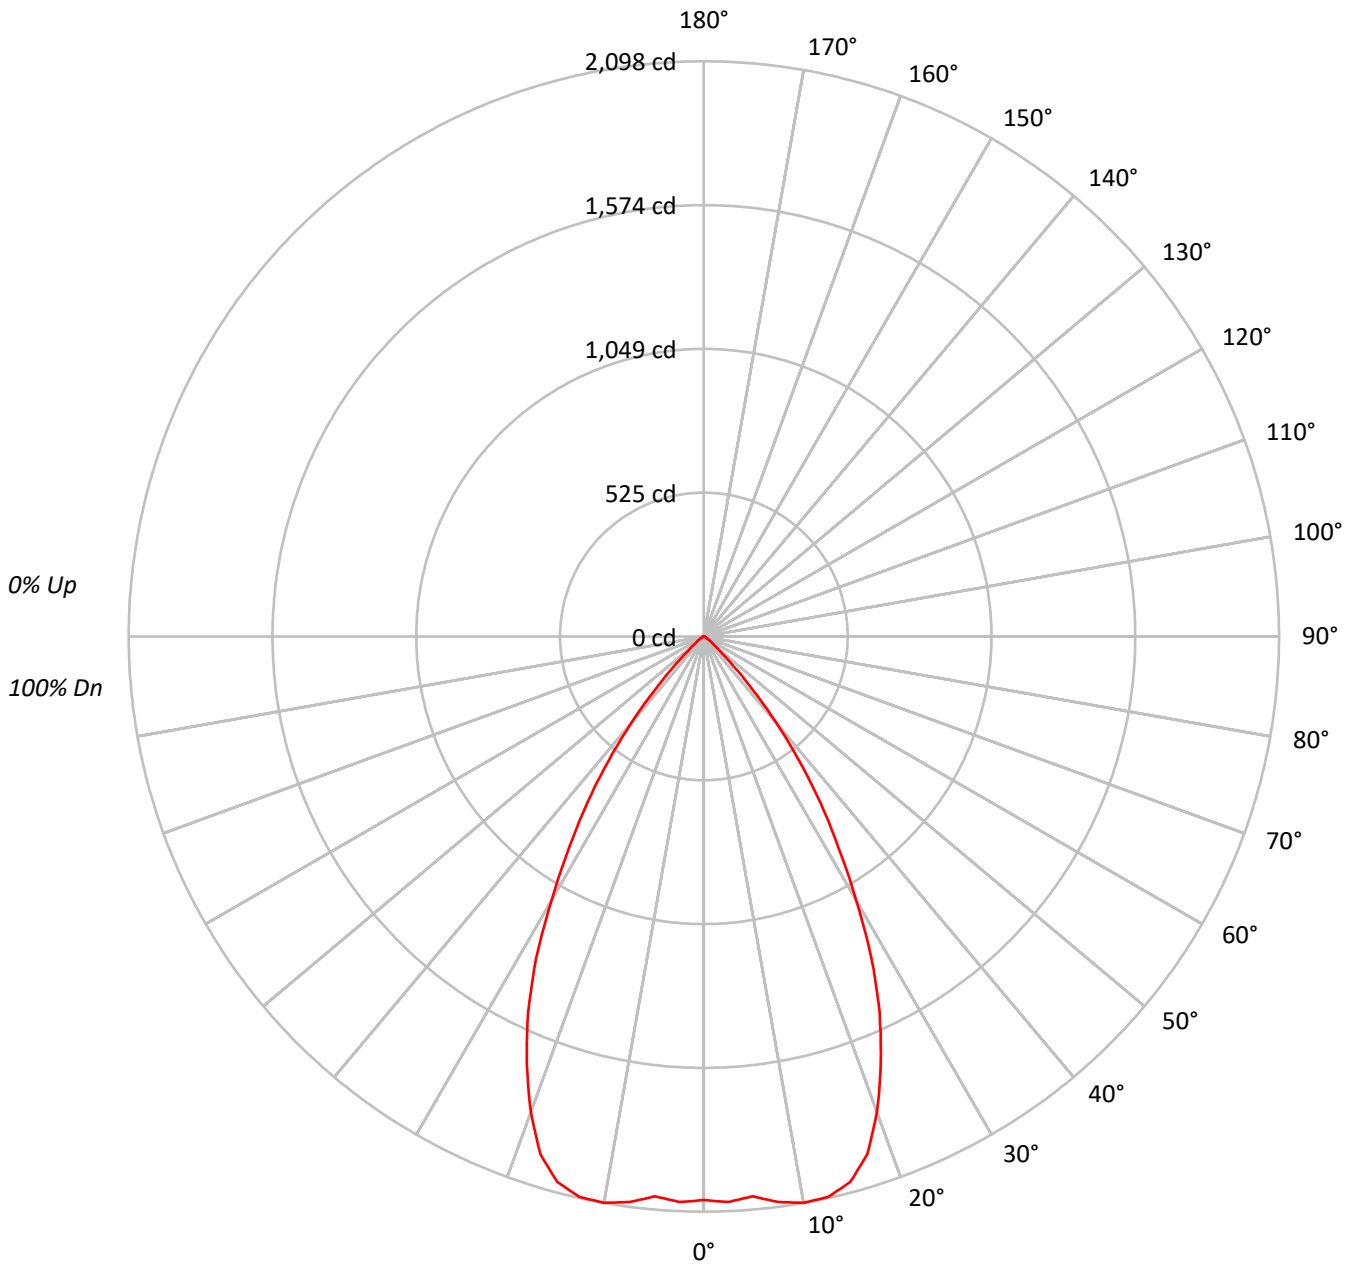



TEST NUMBER: P745605

CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93																			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87																			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80																			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69																			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65																			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60																			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57																			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53																			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	224607
5°	224796
10°	232710
15°	233096
20°	214593
25°	182847
30°	139978
35°	98890
40°	58378
45°	23703
50°	8584
55°	4781
60°	2732
65°	1499
70°	1597
75°	1224
80°	1321
85°	1128

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 23703 cd/sqm



TEST NUMBER: P745605

CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	198.0	9.5
10°-20°	571.0	27.3
20°-30°	685.1	32.8
30°-40°	460.4	22.1
40°-50°	137.8	6.6
50°-60°	24.3	1.2
60°-70°	6.9	0.3
70°-80°	3.4	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1454.0	69.6
0°-40°	1914.4	91.7
0°-60°	2076.5	99.5
0°-90°	2087.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2087.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2056	
5°	2050	198
15°	2061	571
25°	1517	685
35°	741	460
45°	153	138
55°	25	24
65°	6	7
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P745605  
CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2055.7
2.5°	2064.5
5°	2049.6
7.5°	2080.6
10°	2097.5
12.5°	2093.4
15°	2060.7
17.5°	1980.6
20°	1845.6
22.5°	1686.8
25°	1516.7
27.5°	1324.8
30°	1109.5
32.5°	914.4
35°	741.4
37.5°	570.5
40°	409.3
42.5°	267.3
45°	153.4
47.5°	81.2
50°	50.5
52.5°	35.1
55°	25.1
57.5°	18.1
60°	12.5
62.5°	8.2
65°	5.8
67.5°	5.3
70°	5.0
72.5°	3.8
75°	2.9
77.5°	2.6
80°	2.1
82.5°	1.4
85°	0.9
87.5°	0.6
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)