

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745606

Luminaire Tested: LD4D25D010-EU4DR6520359030-4LBDP1LI

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P745606
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR6520359030-4LBDP1LI
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2192.3 lumens
Efficiency: N/A
Efficacy: 87.3 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745606
CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1LI

Luminous Intensity Polar Plot

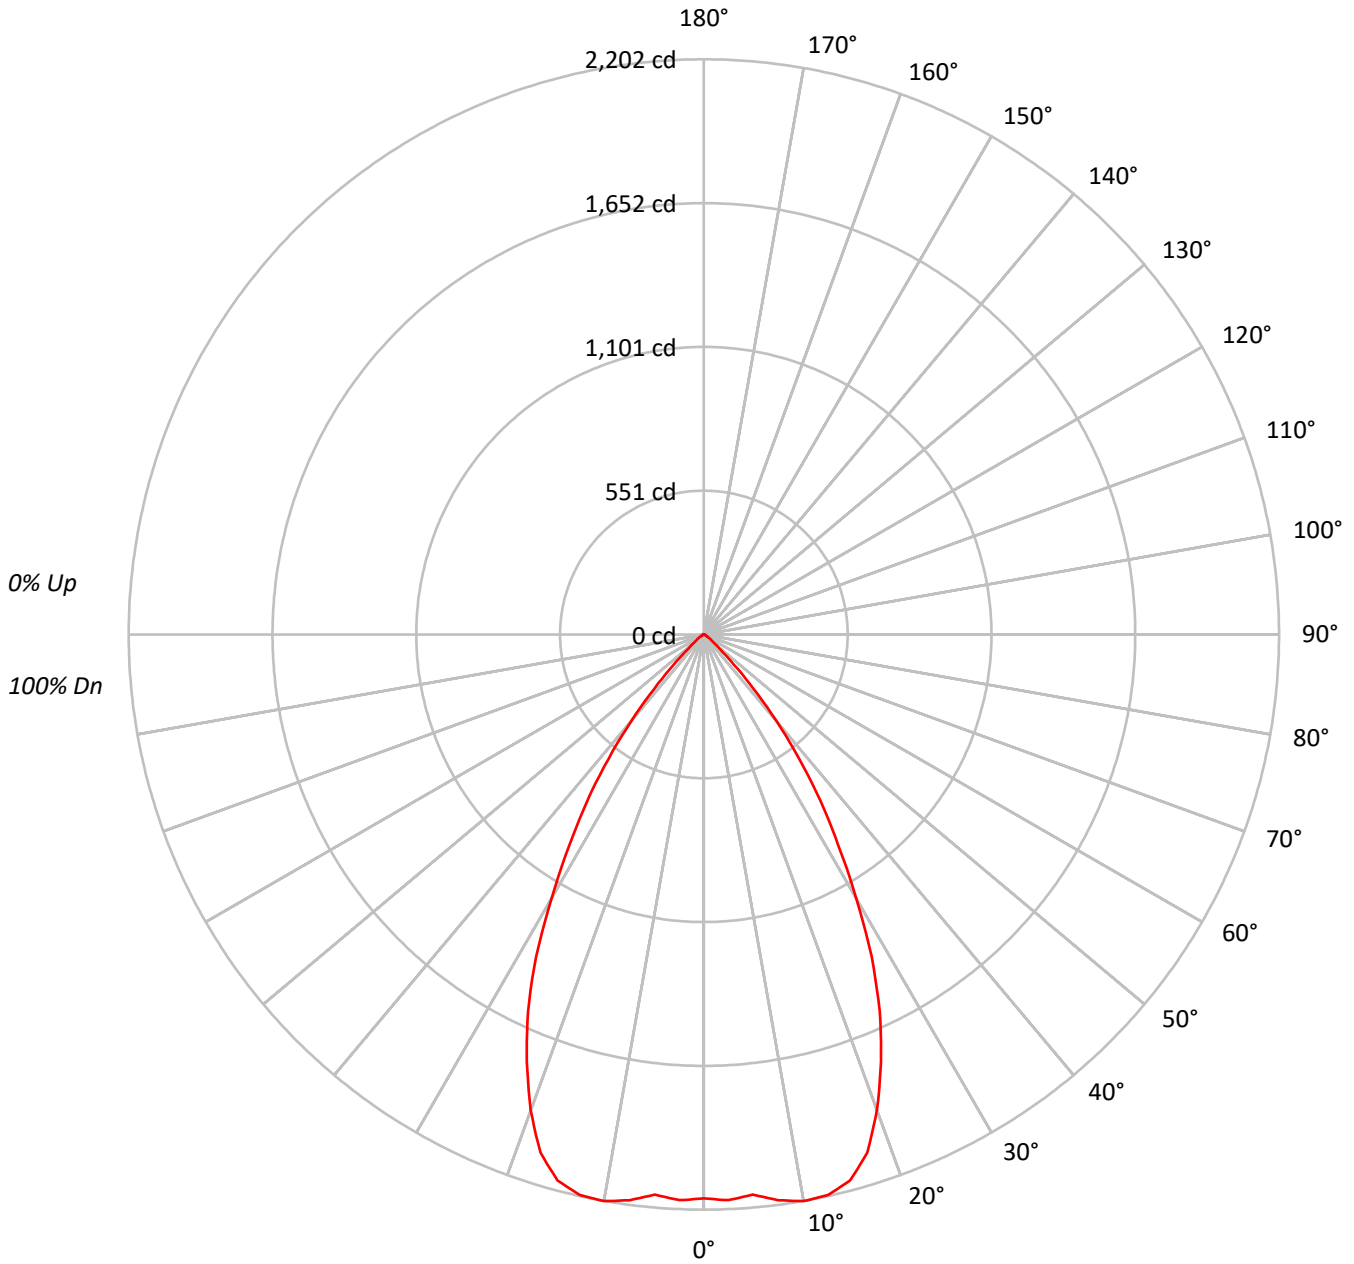



TEST NUMBER: P745606
 CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80		
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75		
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69		
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65		
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60		
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57		
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53		
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	235839
5°	236038
10°	244348
15°	244747
20°	225325
25°	191997
30°	146980
35°	103838
40°	61288
45°	24893
50°	9026
55°	5029
60°	2884
65°	1577
70°	1661
75°	1309
80°	1321
85°	1128

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 24893 cd/sqm



TEST NUMBER: P745606

CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	207.8	9.5
10°-20°	599.5	27.3
20°-30°	719.3	32.8
30°-40°	483.4	22.1
40°-50°	144.7	6.6
50°-60°	25.5	1.2
60°-70°	7.2	0.3
70°-80°	3.6	0.2
80°-90°	1.1	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1526.7	69.6
0°-40°	2010.1	91.7
0°-60°	2180.4	99.5
0°-90°	2192.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2192.3	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2158	
5°	2152	208
15°	2164	600
25°	1593	719
35°	778	483
45°	161	145
55°	26	26
65°	6	7
75°	3	4
85°	1	1
90°	0	



TEST NUMBER: P745606

CATALOG NUMBER: LD4D25D010-EU4DR6520359030-4LBDP1LI

CANDELA DISTRIBUTION (FULL):

	0°
0°	2158.5
2.5°	2167.7
5°	2152.1
7.5°	2184.5
10°	2202.4
12.5°	2198.1
15°	2163.7
17.5°	2079.6
20°	1937.9
22.5°	1771.1
25°	1592.6
27.5°	1391.1
30°	1165.0
32.5°	960.1
35°	778.5
37.5°	599.1
40°	429.7
42.5°	280.7
45°	161.1
47.5°	85.3
50°	53.1
52.5°	36.8
55°	26.4
57.5°	19.0
60°	13.2
62.5°	8.6
65°	6.1
67.5°	5.5
70°	5.2
72.5°	4.0
75°	3.1
77.5°	2.8
80°	2.1
82.5°	1.5
85°	0.9
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)