

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744843

Luminaire Tested: LD4D25D010-EU4DR1515309035-4LBS1LI

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744843
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR1515309035-4LBS1LI
Description: 4 INCH ROUND SHALLOW SPECULAR CLEAR TRIM, WITH 15° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2807.9 lumens
Efficiency: N/A
Efficacy: 111.9 lumens/watt
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744843
CATALOG NUMBER: LD4D25D010-EU4DR1515309035-4LBS1LI

Luminous Intensity Polar Plot

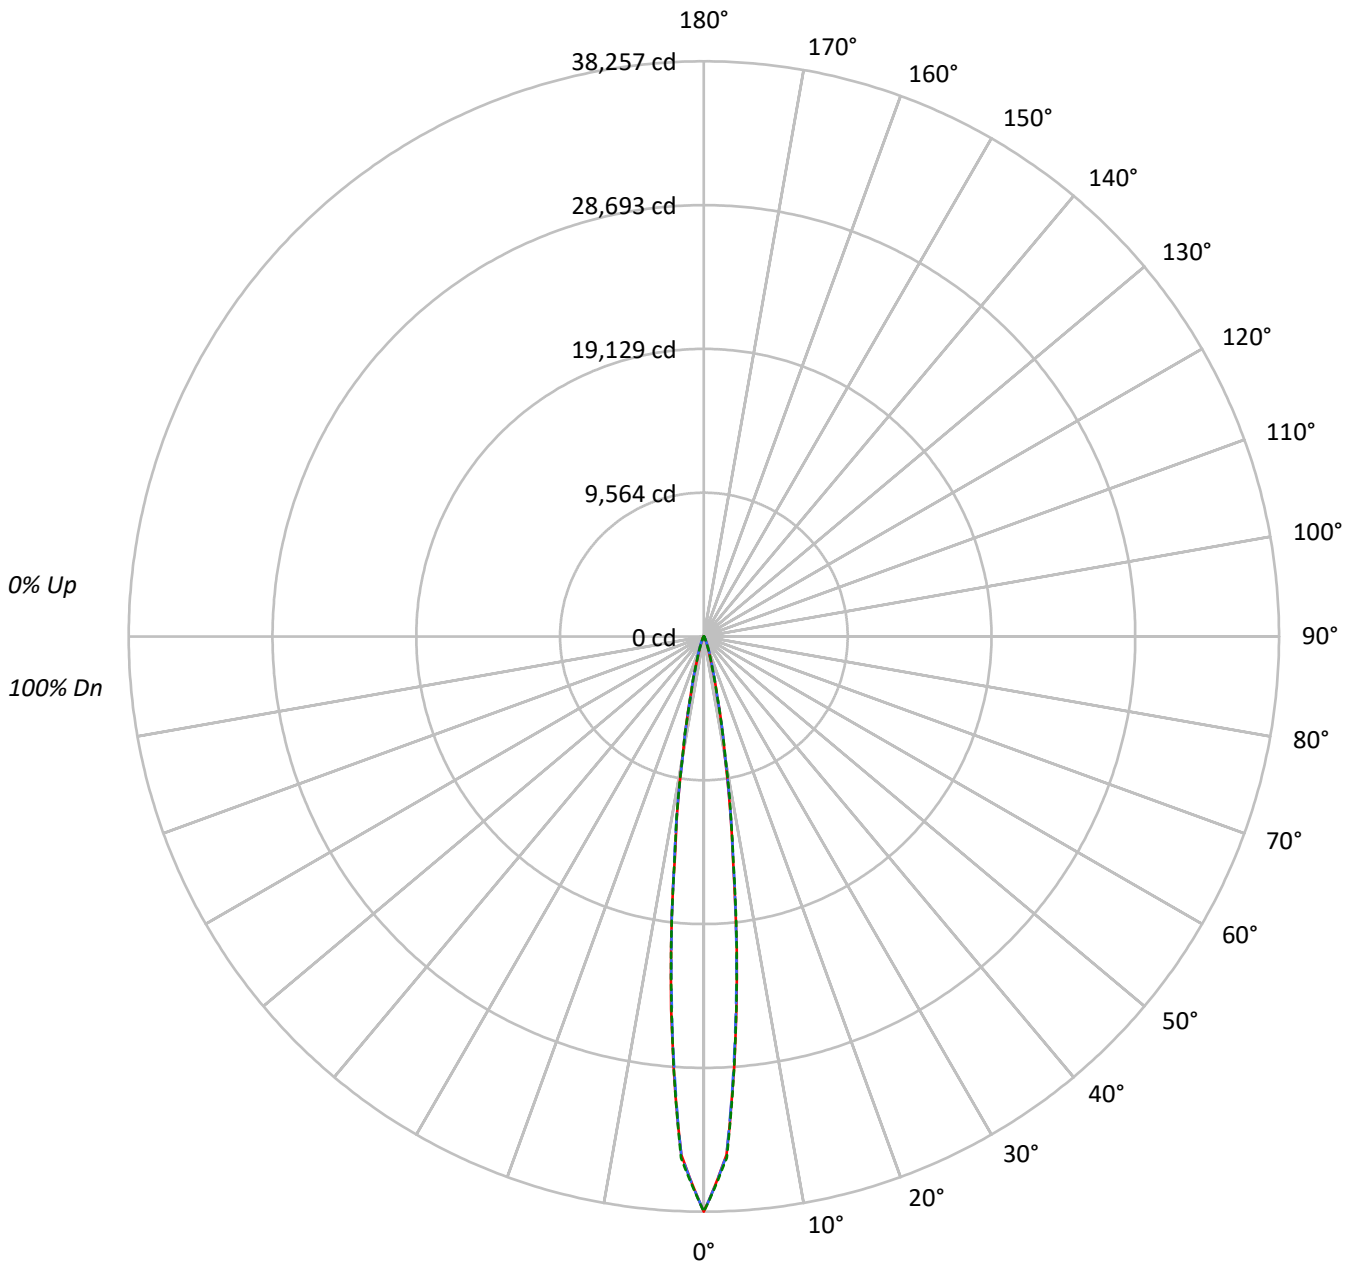



TEST NUMBER: P744843

CATALOG NUMBER: LD4D25D010-EU4DR1515309035-4LBS1LI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4304709	4304709	4304709
5°	2529645	2496890	2516647
10°	754980	760270	771906
15°	187793	191450	185544
20°	56188	65065	57382
25°	19810	25232	20059
30°	7278	9577	7398
35°	3645	4118	3529
40°	2301	2528	2301
45°	1701	1813	1701
50°	1349	1349	1349
55°	1128	1128	1128
60°	913	913	913
65°	692	692	692
70°	592	592	592
75°	370	370	491
80°	252	252	252
85°	133	133	133

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 45°
 Vertical Angle: 45°
 Luminance: 1813 cd/sqm



TEST NUMBER: P744843

CATALOG NUMBER: LD4D25D010-EU4DR1515309035-4LBS1LI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1821.1	64.9
10°-20°	749.1	26.7
20°-30°	148.8	5.3
30°-40°	37.1	1.3
40°-50°	19.5	0.7
50°-60°	14.5	0.5
60°-70°	10.2	0.4
70°-80°	5.8	0.2
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2719.0	96.8
0°-40°	2756.1	98.2
0°-60°	2790.1	99.4
0°-90°	2807.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2807.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	38257	38257	38257	38257	38257	
5°	24891	24635	24569	24739	24763	1818
15°	2162	2203	2204	2165	2136	741
25°	254	288	324	287	258	134
35°	50	53	57	53	49	34
45°	24	24	26	24	24	19
55°	16	16	16	16	16	14
65°	10	10	10	10	10	10
75°	5	5	5	5	6	6
85°	2	2	2	2	2	2
90°	0	0	0	0	0	



TEST NUMBER: P744843

CATALOG NUMBER: LD4D25D010-EU4DR1515309035-4LBS1LI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	38257.3	38257.3	38257.3	38257.3	38257.3
2.5°	34509.6	34538.8	34550.1	34584.1	34710.4
5°	24891.0	24635.2	24568.7	24738.8	24763.1
7.5°	14744.5	14796.3	14985.8	15027.9	14875.7
10°	8091.3	8157.7	8148.0	8206.3	8272.7
12.5°	4138.0	4086.2	4070.0	4136.4	4044.0
15°	2162.1	2202.6	2204.2	2165.4	2136.2
17.5°	1162.8	1209.8	1287.6	1224.4	1127.2
20°	686.7	728.8	795.2	743.4	701.3
22.5°	424.3	458.3	505.3	464.8	430.8
25°	254.3	288.3	323.9	286.7	257.5
27.5°	150.6	179.8	202.4	178.2	149.0
30°	97.2	113.4	127.9	111.7	98.8
32.5°	68.0	74.5	81.0	74.5	68.0
35°	50.2	53.4	56.7	53.4	48.6
37.5°	38.9	42.1	43.7	40.5	37.2
40°	32.4	34.0	35.6	34.0	32.4
42.5°	27.5	29.2	29.2	29.2	27.5
45°	24.3	24.3	25.9	24.3	24.3
47.5°	21.1	21.1	22.7	21.1	21.1
50°	19.4	19.4	19.4	19.4	19.4
52.5°	17.8	17.8	17.8	17.8	17.8
55°	16.2	16.2	16.2	16.2	16.2
57.5°	14.6	14.6	14.6	14.6	14.6
60°	13.0	13.0	13.0	13.0	13.0
62.5°	11.3	11.3	11.3	11.3	11.3
65°	9.7	9.7	9.7	9.7	9.7
67.5°	9.7	9.7	9.7	9.7	9.7
70°	8.1	8.1	8.1	8.1	8.1
72.5°	6.5	6.5	6.5	6.5	6.5
75°	4.9	4.9	4.9	4.9	6.5
77.5°	4.9	4.9	4.9	4.9	4.9
80°	3.2	3.2	3.2	3.2	3.2
82.5°	3.2	3.2	3.2	3.2	3.2
85°	1.6	1.6	1.6	1.6	1.6
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)