

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744918

Luminaire Tested: LD4D25D010-EU4DR2015309035-4LBDP1MW

Issue Date: 2/2/2024

Test Information

Test Method: LM-79-2019
Report Number: P744918
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/2/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR2015309035-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 20° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2456.7 lumens
Efficiency: N/A
Efficacy: 97.9 lumens/watt
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P744918

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBDP1MW

Luminous Intensity Polar Plot

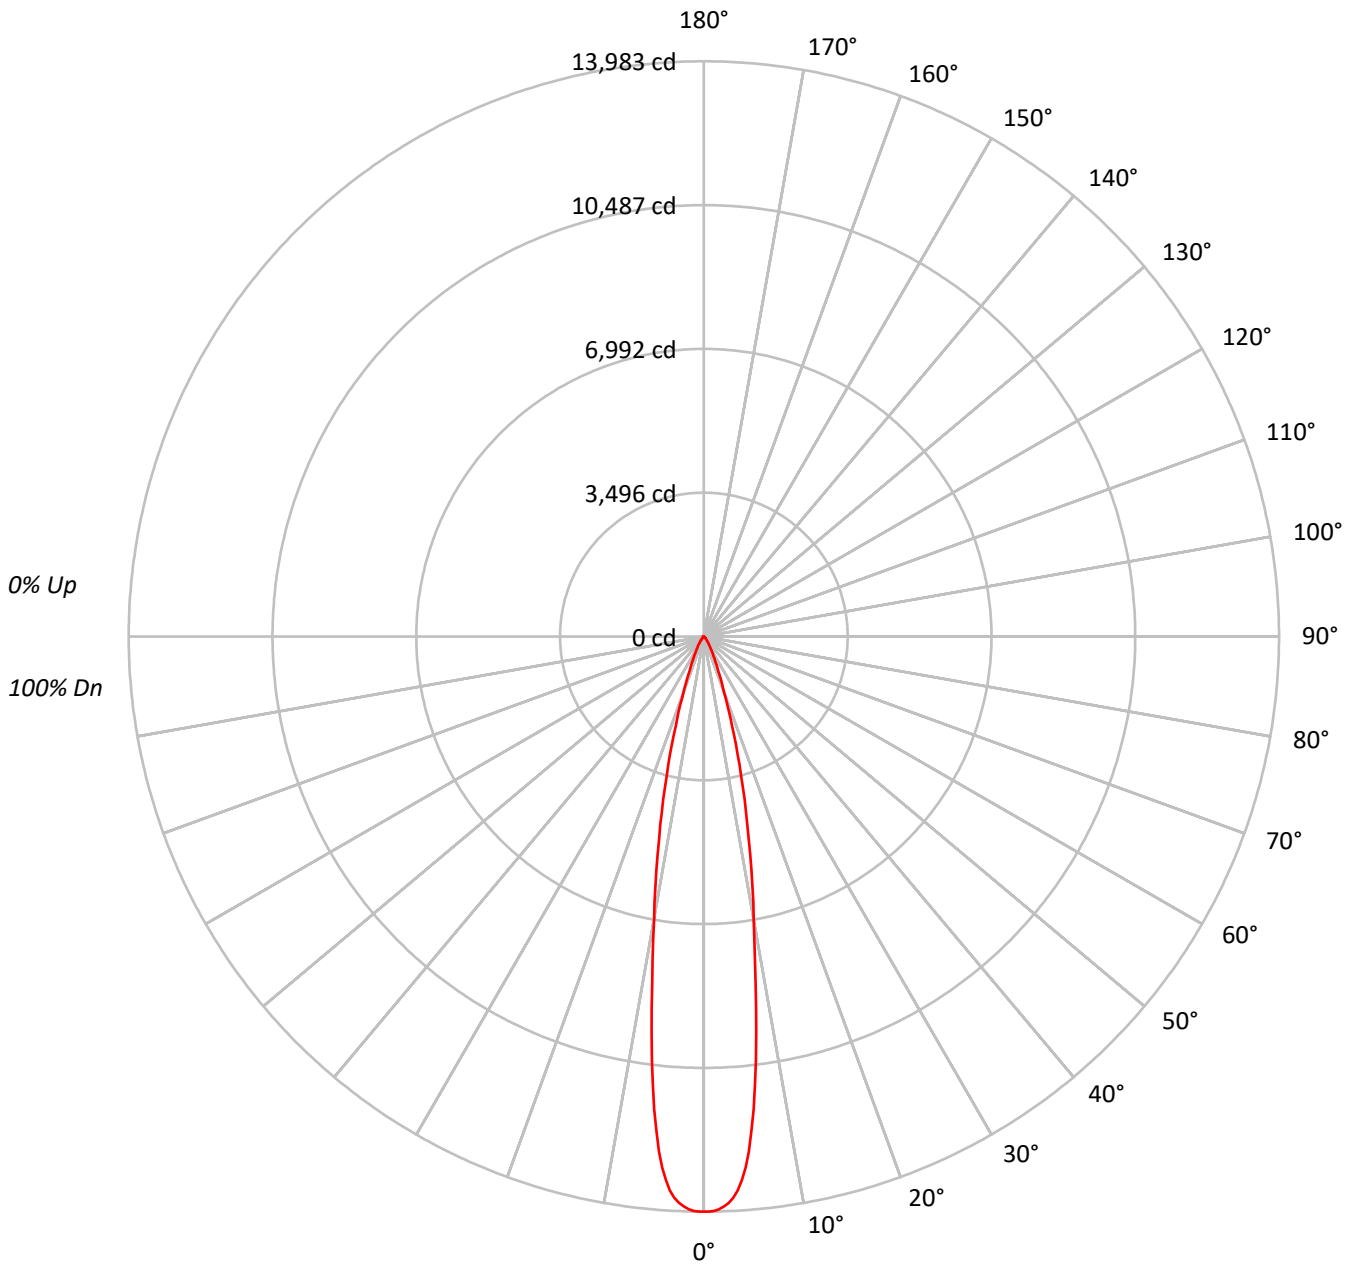



TEST NUMBER: P744918

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97		
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94		
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91		
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88		
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85		
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83		
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81		
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79		
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77		
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1527749
5°	1378314
10°	773584
15°	393233
20°	166491
25°	76854
30°	40688
35°	21928
40°	11724
45°	6922
50°	4029
55°	2133
60°	1355
65°	957
70°	383
75°	0
80°	0
85°	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 6922 cd/sqm



TEST NUMBER: P744918

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	995.5	40.5
10°-20°	980.3	39.9
20°-30°	320.2	13.0
30°-40°	109.1	4.4
40°-50°	36.7	1.5
50°-60°	11.0	0.4
60°-70°	3.7	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2296.1	93.5
0°-40°	2405.1	97.9
0°-60°	2452.8	99.8
0°-90°	2456.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2456.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	13983	
5°	12567	996
15°	3476	980
25°	638	320
35°	164	109
45°	45	37
55°	11	11
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744918

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	13982.6
0.5°	13982.6
1°	13965.2
1.5°	13930.3
2°	13866.8
2.5°	13782.2
3°	13662.6
3.5°	13495.8
4°	13248.0
4.5°	12946.7
5°	12566.9
5.5°	12067.6
6°	11555.9
6.5°	10969.4
7°	10395.4
7.5°	9723.1
8°	9122.9
8.5°	8519.1
9°	7961.3
9.5°	7449.5
10°	6972.6
12.5°	5006.6
15°	3476.4
17.5°	2271.1
20°	1431.9
22.5°	927.6
25°	637.5
27.5°	448.2
30°	322.5
32.5°	231.6
35°	164.4
37.5°	114.6
40°	82.2
42.5°	59.8
45°	44.8
47.5°	34.9
50°	23.7
52.5°	14.9
55°	11.2
57.5°	8.7
60°	6.2
62.5°	5.0
65°	3.7



TEST NUMBER: P744918

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBDP1MW

CANDELA DISTRIBUTION (continued):

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.5
70°		1.2

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)