

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744920

Luminaire Tested: LD4D25D010-EU4DR2015309035-4LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744920  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR2015309035-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2805.9 lumens  
Efficiency: N/A  
Efficacy: 111.8 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744920  
CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBS1H

### Luminous Intensity Polar Plot

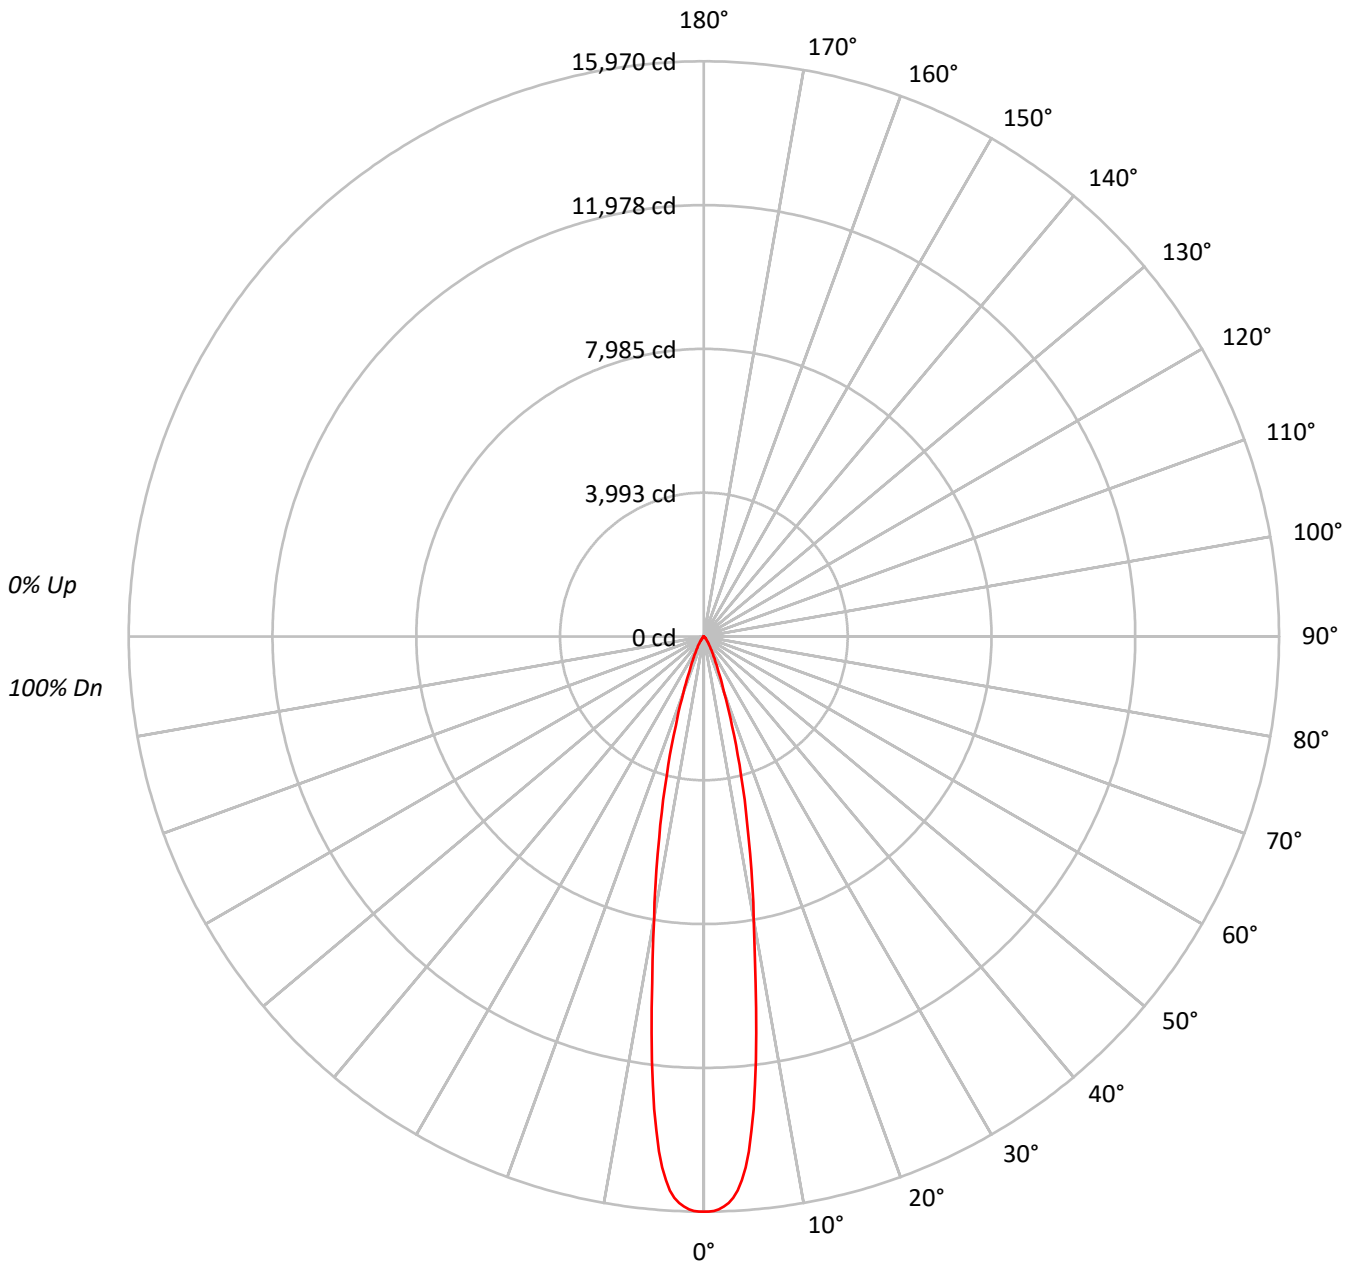



TEST NUMBER: P744920  
 CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97		
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94		
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91		
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88		
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85		
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83		
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81		
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79		
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77		
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75		

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1744927
5°	1574254
10°	883554
15°	449123
20°	190153
25°	87777
30°	46466
35°	25036
40°	13393
45°	7911
50°	4589
55°	2438
60°	1552
65°	1112
70°	447
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7911 cd/sqm



TEST NUMBER: P744920

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1137.1	40.5
10°-20°	1119.6	39.9
20°-30°	365.8	13.0
30°-40°	124.5	4.4
40°-50°	41.9	1.5
50°-60°	12.6	0.4
60°-70°	4.2	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2622.5	93.5
0°-40°	2747.0	97.9
0°-60°	2801.5	99.8
0°-90°	2805.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2805.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15970	
5°	14353	###
15°	3970	1120
25°	728	366
35°	188	125
45°	51	42
55°	13	13
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744920

CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15970.3
0.5°	15970.3
1°	15950.4
1.5°	15910.6
2°	15838.1
2.5°	15741.4
3°	15604.9
3.5°	15414.3
4°	15131.3
4.5°	14787.1
5°	14353.4
5.5°	13783.1
6°	13198.6
6.5°	12528.8
7°	11873.2
7.5°	11105.3
8°	10419.8
8.5°	9730.1
9°	9093.0
9.5°	8508.5
10°	7963.8
12.5°	5718.3
15°	3970.5
17.5°	2593.9
20°	1635.4
22.5°	1059.5
25°	728.1
27.5°	512.0
30°	368.3
32.5°	264.5
35°	187.7
37.5°	130.8
40°	93.9
42.5°	68.3
45°	51.2
47.5°	39.8
50°	27.0
52.5°	17.1
55°	12.8
57.5°	10.0
60°	7.1
62.5°	5.7
65°	4.3



TEST NUMBER: P744920  
CATALOG NUMBER: LD4D25D010-EU4DR2015309035-4LBS1H

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		2.8
70°		1.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)