

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745696

Luminaire Tested: LD4D25D010-EU4DR7020359035-4LBDP1H

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745696  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR7020359035-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 70° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3500K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2539.1 lumens  
Efficiency: N/A  
Efficacy: 101.2 lumens/watt  
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745696  
CATALOG NUMBER: LD4D25D010-EU4DR7020359035-4LBDP1H

### Luminous Intensity Polar Plot

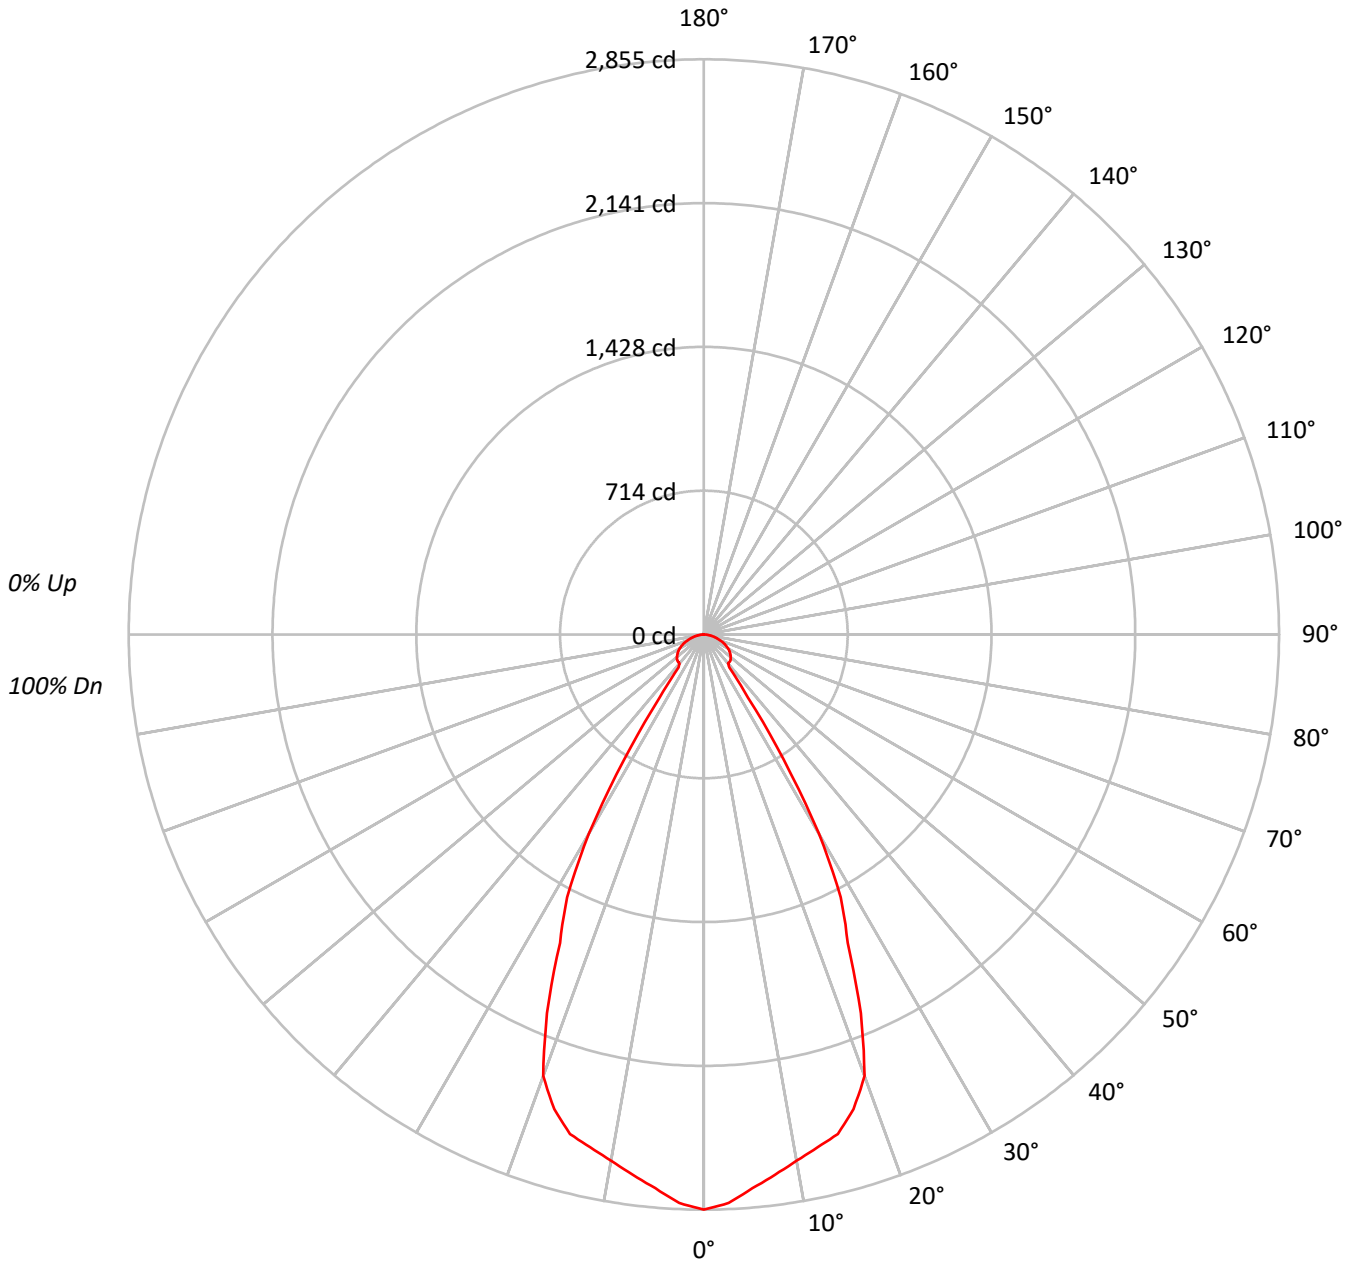



TEST NUMBER: P745696

CATALOG NUMBER: LD4D25D010-EU4DR7020359035-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	311907
5°	302635
10°	294207
15°	290344
20°	271125
25°	203679
30°	143990
35°	51006
40°	26814
45°	28555
50°	29576
55°	30136
60°	30331
65°	29680
70°	28016
75°	25962
80°	23029
85°	18679

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 60°  
 Luminance: 30331 cd/sqm



TEST NUMBER: P745696

CATALOG NUMBER: LD4D25D010-EU4DR7020359035-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	260.3	10.3
10°-20°	713.9	28.1
20°-30°	786.3	31.0
30°-40°	300.4	11.8
40°-50°	141.8	5.6
50°-60°	141.0	5.6
60°-70°	112.9	4.4
70°-80°	64.9	2.6
80°-90°	17.7	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1760.4	69.3
0°-40°	2060.8	81.2
0°-60°	2343.7	92.3
0°-90°	2539.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2539.1	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2855	
5°	2759	260
15°	2567	714
25°	1690	786
35°	382	300
45°	185	142
55°	158	141
65°	115	113
75°	62	65
85°	15	18
90°	0	



TEST NUMBER: P745696

CATALOG NUMBER: LD4D25D010-EU4DR7020359035-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	2854.7
2.5°	2824.9
5°	2759.3
7.5°	2704.7
10°	2651.8
12.5°	2607.0
15°	2566.8
17.5°	2469.6
20°	2331.8
22.5°	2034.4
25°	1689.5
27.5°	1470.8
30°	1141.3
32.5°	737.2
35°	382.4
37.5°	206.5
40°	188.0
42.5°	186.7
45°	184.8
47.5°	180.8
50°	174.0
52.5°	166.3
55°	158.2
57.5°	149.1
60°	138.8
62.5°	127.0
65°	114.8
67.5°	101.2
70°	87.7
72.5°	74.1
75°	61.5
77.5°	48.4
80°	36.6
82.5°	25.8
85°	14.9
87.5°	5.9
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)