

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744852

Luminaire Tested: LD4D25D010-EU4DR1515309040-4LBDP1LI

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744852  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-21)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR1515309040-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 15° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2741.3 lumens  
Efficiency: N/A  
Efficacy: 109.2 lumens/watt  
Spacing Criteria (0/90/45): 0.22 / 0.22 / 0.23  
Luminous Opening: Vertical Cylinder (Dia: 0.35' x H: 0.35')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744852  
CATALOG NUMBER: LD4D25D010-EU4DR1515309040-4LBDP1LI

### Luminous Intensity Polar Plot

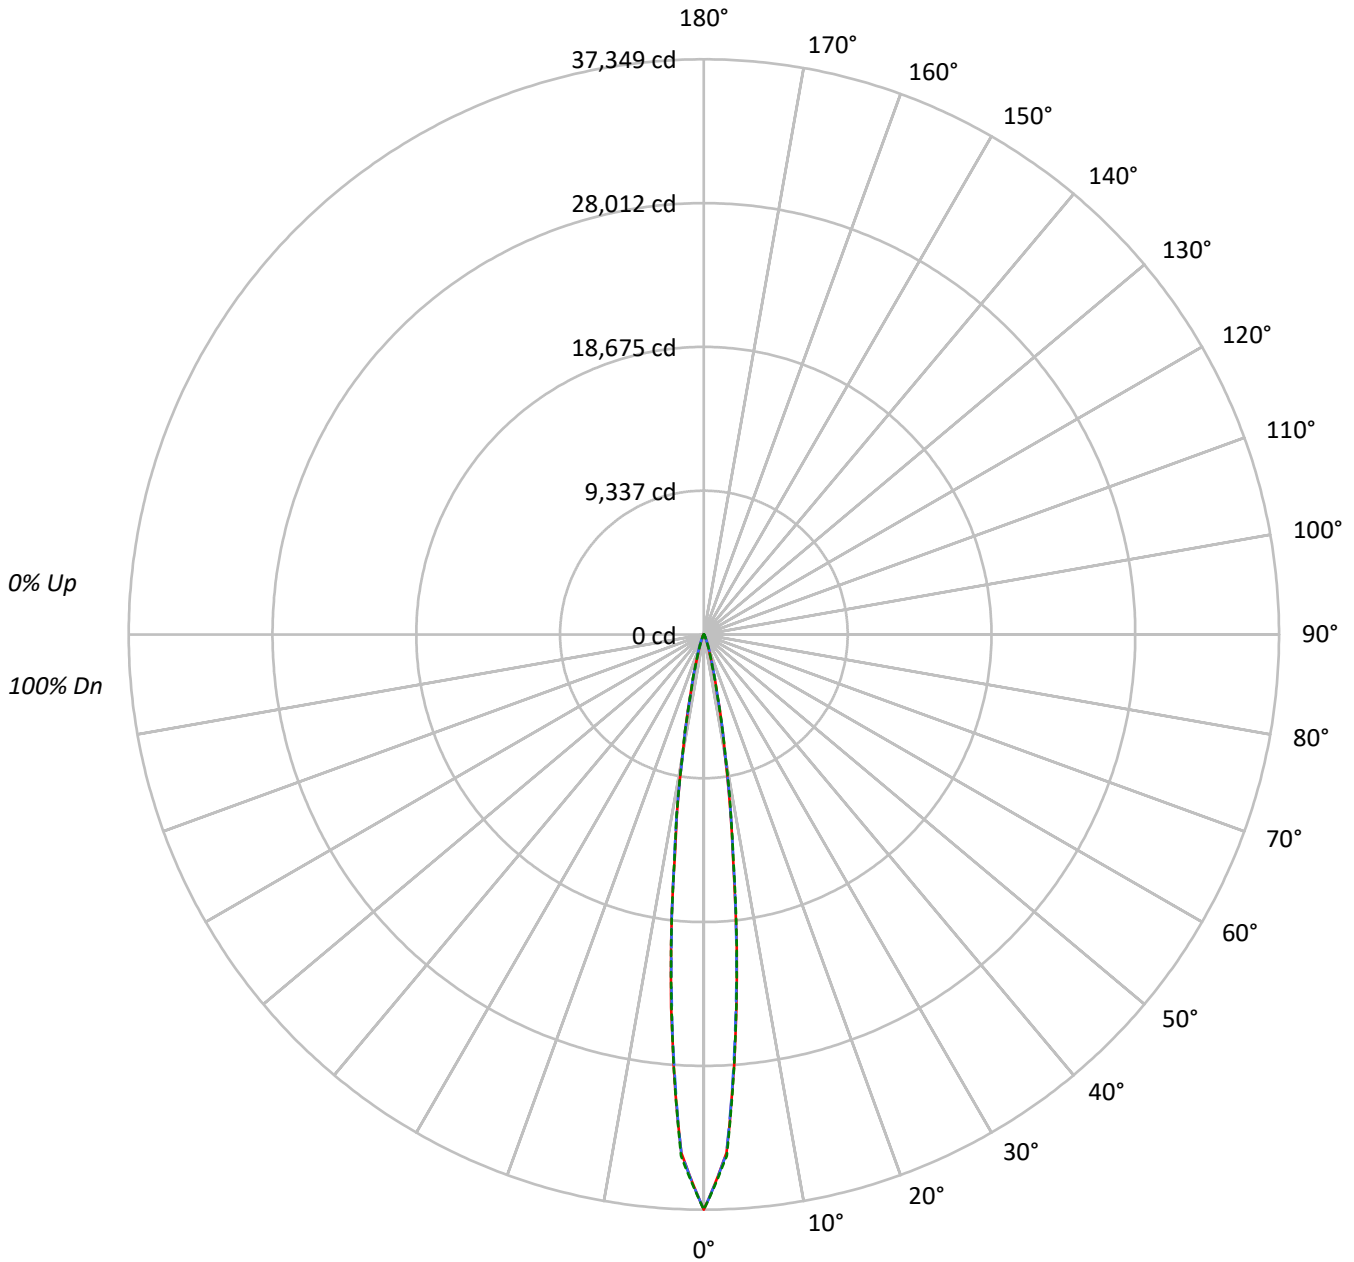



TEST NUMBER: P744852

CATALOG NUMBER: LD4D25D010-EU4DR1515309040-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0													
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100						100													
1	116	114	112	111	113	112	110	109	108	107	106	104	103	103	101	100	100	98						98													
2	113	110	107	105	111	108	106	104	105	103	102	102	101	100	100	98	98	96						96													
3	110	106	103	101	108	105	102	100	103	100	99	100	99	97	98	97	96	94						94													
4	108	103	100	98	106	102	99	97	100	98	96	99	97	95	97	95	94	93						93													
5	106	101	98	95	104	100	97	95	98	96	94	97	95	93	96	94	92	92						92													
6	104	99	95	93	102	98	95	93	97	94	92	96	93	92	95	93	91	90						90													
7	102	97	94	91	101	96	93	91	95	93	91	94	92	90	93	91	90	89						89													
8	100	95	92	90	99	95	92	90	94	91	89	93	91	89	92	90	89	88						88													
9	99	93	90	88	98	93	90	88	92	90	88	92	89	88	91	89	88	87						87													
10	97	92	89	87	96	92	89	87	91	89	87	91	88	87	90	88	86	86						86													

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4202541	4202541	4202541
5°	2469613	2437640	2456919
10°	737065	742225	753589
15°	183337	186907	181140
20°	54854	63519	56016
25°	19335	24632	19584
30°	7106	9353	7219
35°	3558	4016	3442
40°	2244	2471	2244
45°	1659	1771	1659
50°	1321	1321	1321
55°	1100	1100	1100
60°	885	885	885
65°	678	678	678
70°	578	578	578
75°	355	355	476
80°	252	252	252
85°	133	133	133

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 45°  
 Vertical Angle: 45°  
 Luminance: 1771 cd/sqm



TEST NUMBER: P744852  
 CATALOG NUMBER: LD4D25D010-EU4DR1515309040-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1777.9	64.9
10°-20°	731.3	26.7
20°-30°	145.3	5.3
30°-40°	36.2	1.3
40°-50°	19.1	0.7
50°-60°	14.1	0.5
60°-70°	10.0	0.4
70°-80°	5.7	0.2
80°-90°	1.7	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2654.5	96.8
0°-40°	2690.7	98.2
0°-60°	2723.9	99.4
0°-90°	2741.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2741.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	37349	37349	37349	37349	37349	
5°	24300	24050	23986	24152	24175	1775
15°	2111	2150	2152	2114	2086	724
25°	248	281	316	280	251	130
35°	49	52	55	52	47	33
45°	24	24	25	24	24	19
55°	16	16	16	16	16	14
65°	10	10	10	10	10	10
75°	5	5	5	5	6	6
85°	2	2	2	2	2	2
90°	0	0	0	0	0	



TEST NUMBER: P744852

CATALOG NUMBER: LD4D25D010-EU4DR1515309040-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	37349.3	37349.3	37349.3	37349.3	37349.3
2.5°	33690.6	33719.1	33730.1	33763.3	33886.7
5°	24300.3	24050.5	23985.7	24151.7	24175.4
7.5°	14394.6	14445.2	14630.1	14671.3	14522.6
10°	7899.3	7964.1	7954.6	8011.6	8076.4
12.5°	4039.8	3989.2	3973.4	4038.2	3948.1
15°	2110.8	2150.3	2151.9	2114.0	2085.5
17.5°	1135.2	1181.1	1257.0	1195.3	1100.5
20°	670.4	711.5	776.3	725.7	684.6
22.5°	414.3	447.5	493.3	453.8	420.6
25°	248.2	281.4	316.2	279.9	251.4
27.5°	147.0	175.5	197.6	173.9	145.5
30°	94.9	110.7	124.9	109.1	96.4
32.5°	66.4	72.7	79.1	72.7	66.4
35°	49.0	52.2	55.3	52.2	47.4
37.5°	37.9	41.1	42.7	39.5	36.4
40°	31.6	33.2	34.8	33.2	31.6
42.5°	26.9	28.5	28.5	28.5	26.9
45°	23.7	23.7	25.3	23.7	23.7
47.5°	20.6	20.6	22.1	20.6	20.6
50°	19.0	19.0	19.0	19.0	19.0
52.5°	17.4	17.4	17.4	17.4	17.4
55°	15.8	15.8	15.8	15.8	15.8
57.5°	14.2	14.2	14.2	14.2	14.2
60°	12.6	12.6	12.6	12.6	12.6
62.5°	11.1	11.1	11.1	11.1	11.1
65°	9.5	9.5	9.5	9.5	9.5
67.5°	9.5	9.5	9.5	9.5	9.5
70°	7.9	7.9	7.9	7.9	7.9
72.5°	6.3	6.3	6.3	6.3	6.3
75°	4.7	4.7	4.7	4.7	6.3
77.5°	4.7	4.7	4.7	4.7	4.7
80°	3.2	3.2	3.2	3.2	3.2
82.5°	3.2	3.2	3.2	3.2	3.2
85°	1.6	1.6	1.6	1.6	1.6
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report







— 0°-180°    - - 45°-225°    - - - 90°-270°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)