

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P744929

Luminaire Tested: LD4D25D010-EU4DR2015309040-4LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P744929  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR2015309040-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2739.3 lumens  
Efficiency: N/A  
Efficacy: 109.1 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P744929  
CATALOG NUMBER: LD4D25D010-EU4DR2015309040-4LBDP1H

### Luminous Intensity Polar Plot

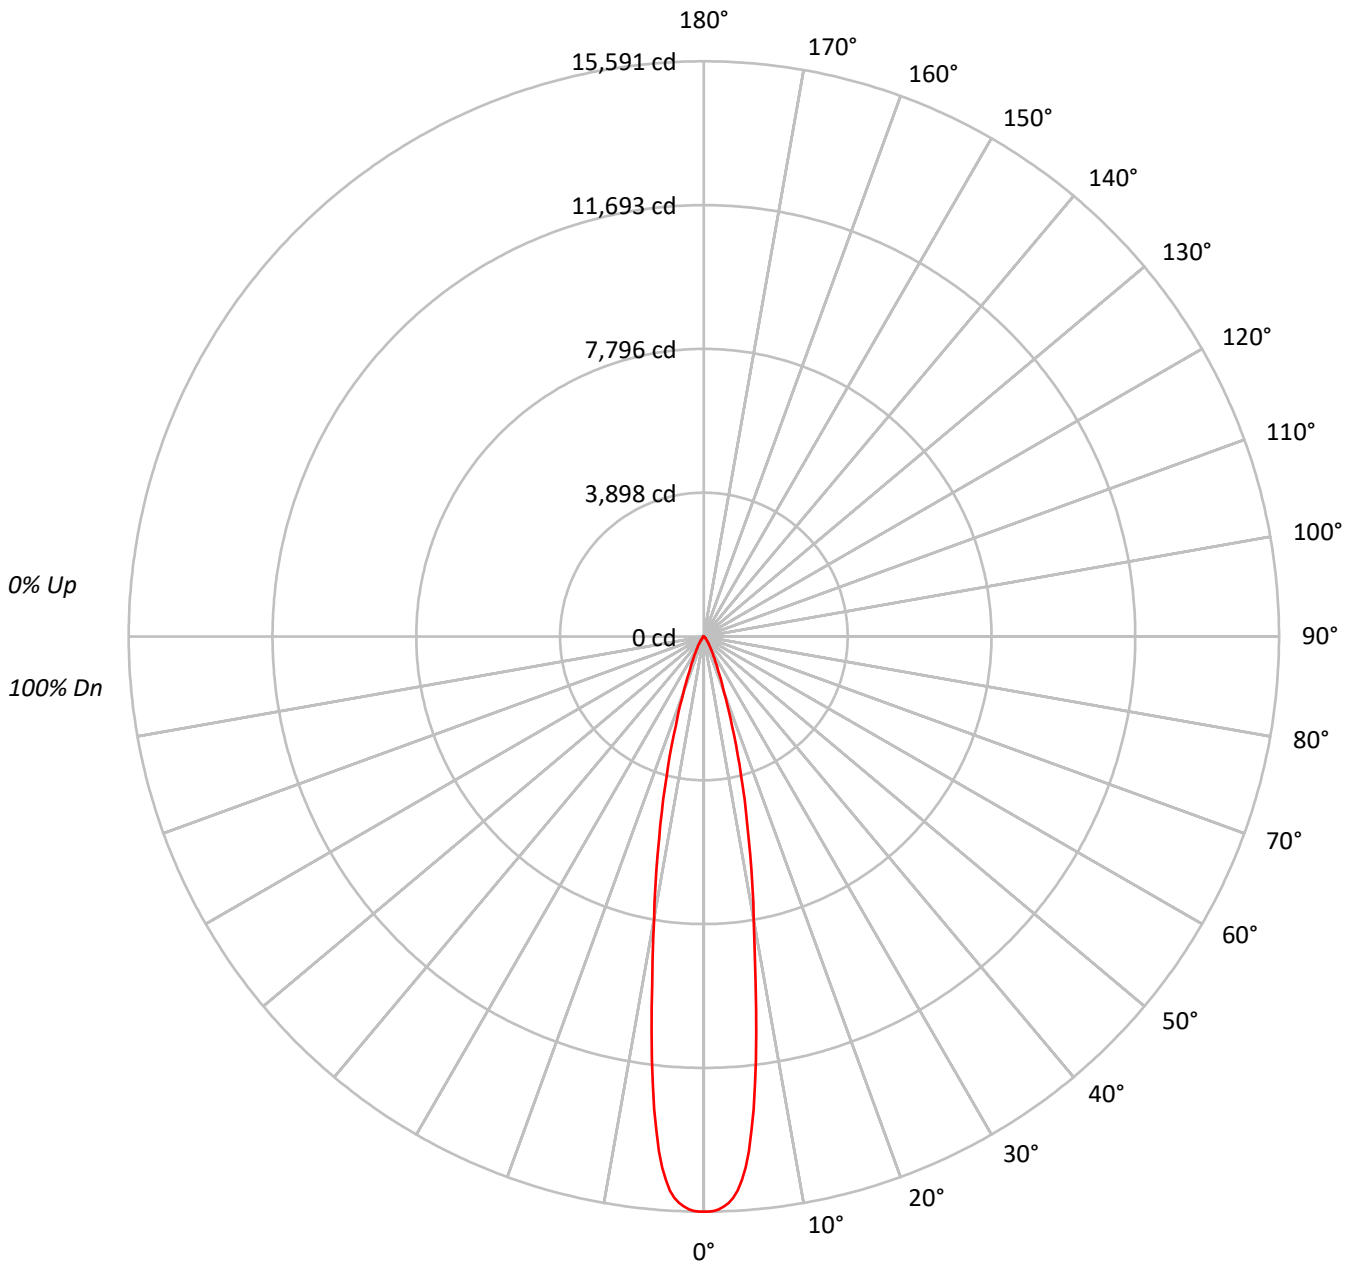



TEST NUMBER: P744929

CATALOG NUMBER: LD4D25D010-EU4DR2015309040-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1703517
5°	1536897
10°	862585
15°	438468
20°	185641
25°	85691
30°	45368
35°	24449
40°	13065
45°	7726
50°	4487
55°	2381
60°	1508
65°	1086
70°	447
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7726 cd/sqm



TEST NUMBER: P744929

CATALOG NUMBER: LD4D25D010-EU4DR2015309040-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1110.1	40.5
10°-20°	1093.1	39.9
20°-30°	357.1	13.0
30°-40°	121.6	4.4
40°-50°	40.9	1.5
50°-60°	12.3	0.4
60°-70°	4.1	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2560.2	93.5
0°-40°	2681.8	97.9
0°-60°	2735.0	99.8
0°-90°	2739.3	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2739.3	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15591	
5°	14013	###
15°	3876	1093
25°	711	357
35°	183	122
45°	50	41
55°	12	12
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P744929

CATALOG NUMBER: LD4D25D010-EU4DR2015309040-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	15591.3
0.5°	15591.3
1°	15571.9
1.5°	15533.0
2°	15462.2
2.5°	15367.8
3°	15234.5
3.5°	15048.5
4°	14772.2
4.5°	14436.2
5°	14012.8
5.5°	13456.0
6°	12885.4
6.5°	12231.5
7°	11591.4
7.5°	10841.7
8°	10172.5
8.5°	9499.2
9°	8877.2
9.5°	8306.6
10°	7774.8
12.5°	5582.6
15°	3876.3
17.5°	2532.4
20°	1596.6
22.5°	1034.3
25°	710.8
27.5°	499.8
30°	359.6
32.5°	258.2
35°	183.3
37.5°	127.7
40°	91.6
42.5°	66.6
45°	50.0
47.5°	38.9
50°	26.4
52.5°	16.7
55°	12.5
57.5°	9.7
60°	6.9
62.5°	5.6
65°	4.2



TEST NUMBER: P744929  
CATALOG NUMBER: LD4D25D010-EU4DR2015309040-4LBDP1H

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		2.8
70°		1.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)