

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745084

Luminaire Tested: LD4D25D010-EU4DR3020359040-4LBDP1B

Issue Date: 1/30/2024

Test Information

Test Method: LM-79-2019
Report Number: P745084
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-16)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 1/30/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR3020359040-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 30° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2032.4 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 0.52 / 0.52 / 0.49
Luminous Opening: Rectangular (W 0.38' x L: 0.38' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745084

CATALOG NUMBER: LD4D25D010-EU4DR3020359040-4LBDP1B

Luminous Intensity Polar Plot

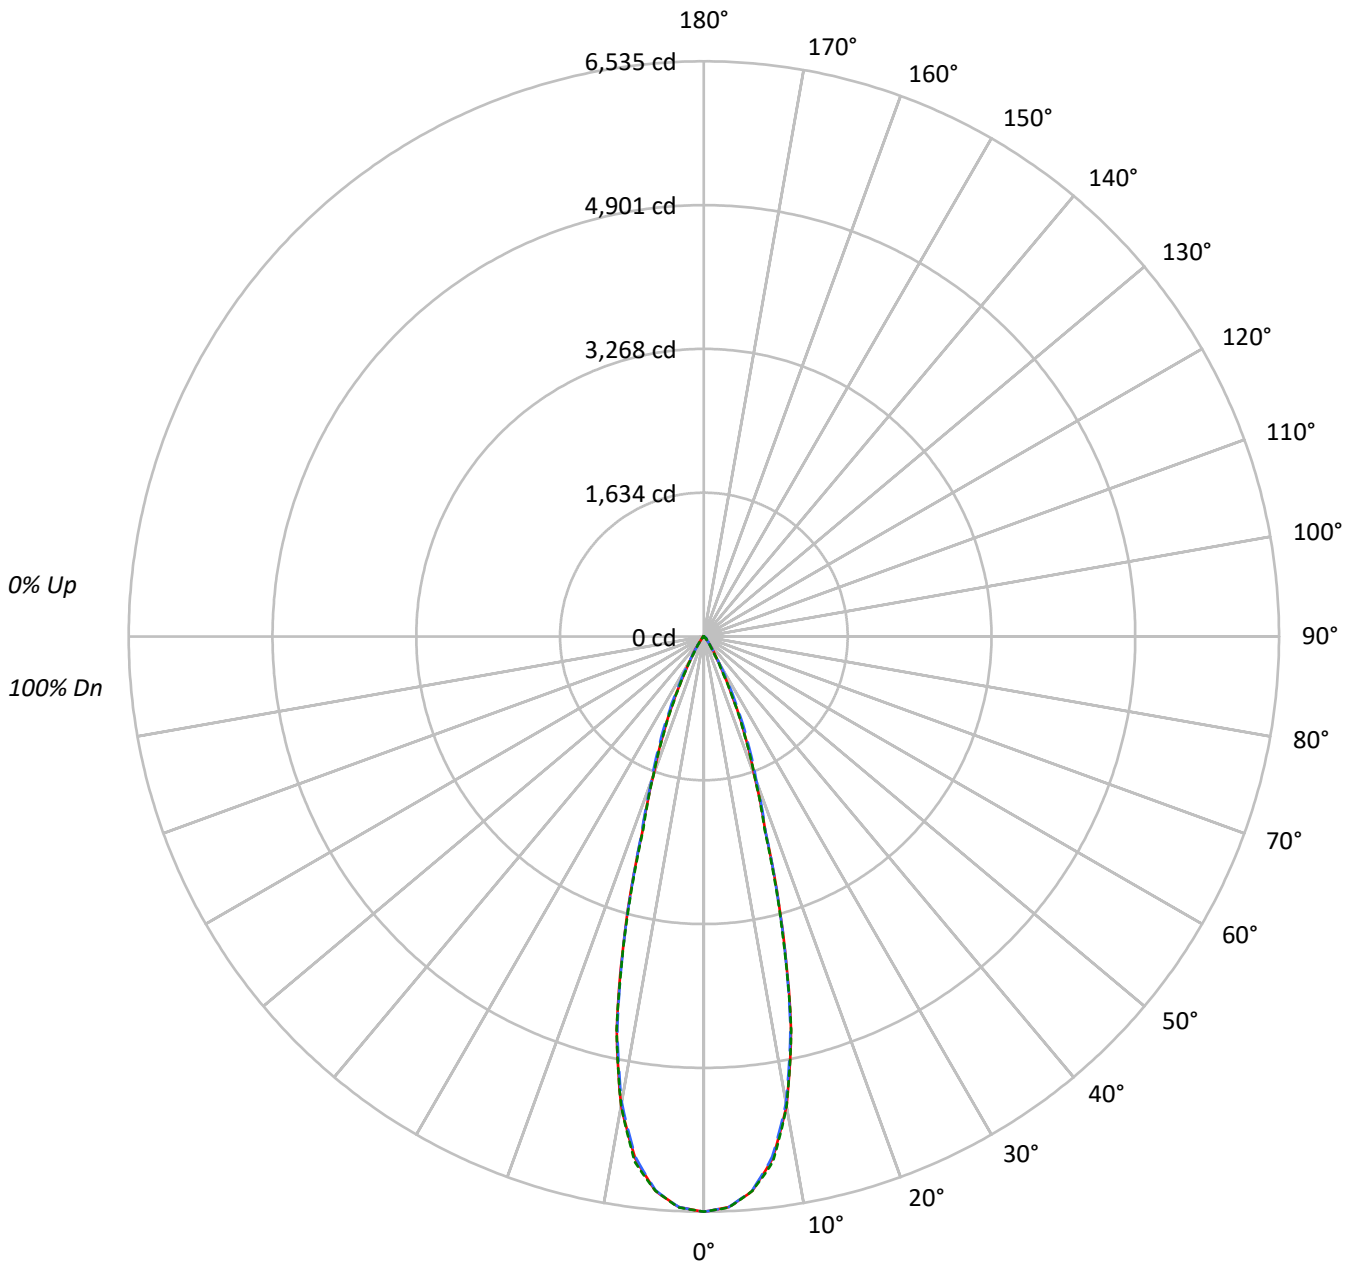



TEST NUMBER: P745084

CATALOG NUMBER: LD4D25D010-EU4DR3020359040-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	115	113	111	109	112	110	109	107	106	105	104	103	102	101	99	99	98	96																			
2	111	107	104	101	109	105	102	100	102	100	98	99	97	96	97	95	94	92																			
3	107	102	98	95	105	101	97	94	98	95	93	96	93	91	94	92	90	89																			
4	103	98	93	90	102	96	93	90	94	91	89	93	90	88	91	89	87	85																			
5	100	94	89	86	98	93	89	86	91	88	85	90	86	84	88	86	83	82																			
6	97	90	85	82	95	89	85	82	88	84	81	87	83	81	85	83	80	79																			
7	94	87	82	79	92	86	82	79	85	81	78	84	81	78	83	80	78	77																			
8	91	84	79	76	90	83	79	76	82	78	76	81	78	75	80	77	75	74																			
9	88	81	76	73	87	80	76	73	80	76	73	79	75	73	78	75	73	72																			
10	85	78	74	71	85	78	74	71	77	73	71	76	73	71	76	73	70	69																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	500211	500211	500211
5°	485848	485279	485871
10°	420822	417853	420721
15°	274563	273089	271718
20°	136528	141652	136341
25°	68773	77556	67362
30°	27532	30007	23988
35°	12774	12232	10251
40°	5516	6125	5196
45°	3886	4828	3929
50°	1334	3513	1417
55°	774	1455	814
60°	551	643	551
65°	344	344	344
70°	224	134	224
75°	0	89	0
80°	0	0	0
85°	0	0	0

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 22.5°
 Vertical Angle: 45°
 Luminance: 4828 cd/sqm



TEST NUMBER: P745084

CATALOG NUMBER: LD4D25D010-EU4DR3020359040-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	574.7	28.3
10°-20°	925.5	45.5
20°-30°	399.9	19.7
30°-40°	91.2	4.5
40°-50°	31.3	1.5
50°-60°	7.6	0.4
60°-70°	2.0	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1900.1	93.5
0°-40°	1991.2	98.0
0°-60°	2030.2	99.9
0°-90°	2032.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2032.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	6535	6535	6535	6535	6535	
5°	6323	6317	6316	6329	6324	575
15°	3465	3423	3446	3435	3429	928
25°	814	845	918	824	798	390
35°	137	140	131	130	110	93
45°	36	45	45	45	36	26
55°	6	6	11	6	6	6
65°	2	2	2	2	2	2
75°	0	0	0	0	0	0
85°	0	0	0	0	0	0
90°	0	0	0	0	0	



TEST NUMBER: P745084

CATALOG NUMBER: LD4D25D010-EU4DR3020359040-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	6535.0	6535.0	6535.0	6535.0	6535.0
2.5°	6491.6	6487.1	6489.7	6492.9	6494.2
5°	6323.2	6317.1	6315.8	6329.0	6323.5
7.5°	5983.4	5974.7	5961.6	5991.5	6019.4
10°	5414.3	5404.6	5376.1	5390.2	5413.0
12.5°	4573.9	4542.8	4542.2	4587.1	4581.0
15°	3464.8	3423.1	3446.2	3435.0	3428.9
17.5°	2330.0	2313.9	2344.7	2335.4	2295.3
20°	1676.1	1680.2	1739.0	1709.5	1673.8
22.5°	1223.1	1238.1	1307.8	1231.7	1203.8
25°	814.3	845.1	918.3	823.6	797.6
27.5°	500.8	515.0	589.1	494.4	480.3
30°	311.5	304.5	339.5	291.3	271.4
32.5°	204.4	195.4	206.6	185.5	169.4
35°	136.7	139.6	130.9	129.9	109.7
37.5°	85.4	98.2	86.6	92.4	70.6
40°	55.2	71.2	61.3	67.7	52.0
42.5°	45.3	54.9	50.4	53.6	46.2
45°	35.9	44.6	44.6	44.6	36.3
47.5°	19.9	29.9	38.2	30.5	21.2
50°	11.2	15.1	29.5	15.7	11.9
52.5°	7.7	8.7	20.2	9.0	8.0
55°	5.8	6.1	10.9	6.4	6.1
57.5°	4.5	4.8	5.8	4.8	4.5
60°	3.6	3.6	4.2	3.8	3.6
62.5°	2.6	2.6	2.9	2.6	2.6
65°	1.9	1.9	1.9	1.9	1.9
67.5°	1.0	1.3	1.3	1.3	1.3
70°	1.0	0.6	0.6	0.6	1.0
72.5°	0.6	0.3	0.3	0.3	0.3
75°	0.0	0.0	0.3	0.0	0.0
77.5°	0.0	0.0	0.0	0.0	0.0
80°	0.0	0.0	0.0	0.0	0.0
82.5°	0.0	0.0	0.0	0.0	0.0
85°	0.0	0.0	0.0	0.0	0.0
87.5°	0.0	0.0	0.0	0.0	0.0
90°	0.0	0.0	0.0	0.0	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report





— 0°-180° - - 45°-225° - - - - 90°-270°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)