

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745554

Luminaire Tested: LD4D25D010-EU4DR6020359040-4LBDP1LI

Issue Date: 2/5/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745554  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-57)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/5/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D25D010-EU4DR6020359040-4LBDP1LI  
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR CLEAR TRIM, WITH 60° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2721.9 lumens  
Efficiency: N/A  
Efficacy: 108.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.83  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 25.1  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745554  
CATALOG NUMBER: LD4D25D010-EU4DR6020359040-4LBDP1LI

### Luminous Intensity Polar Plot

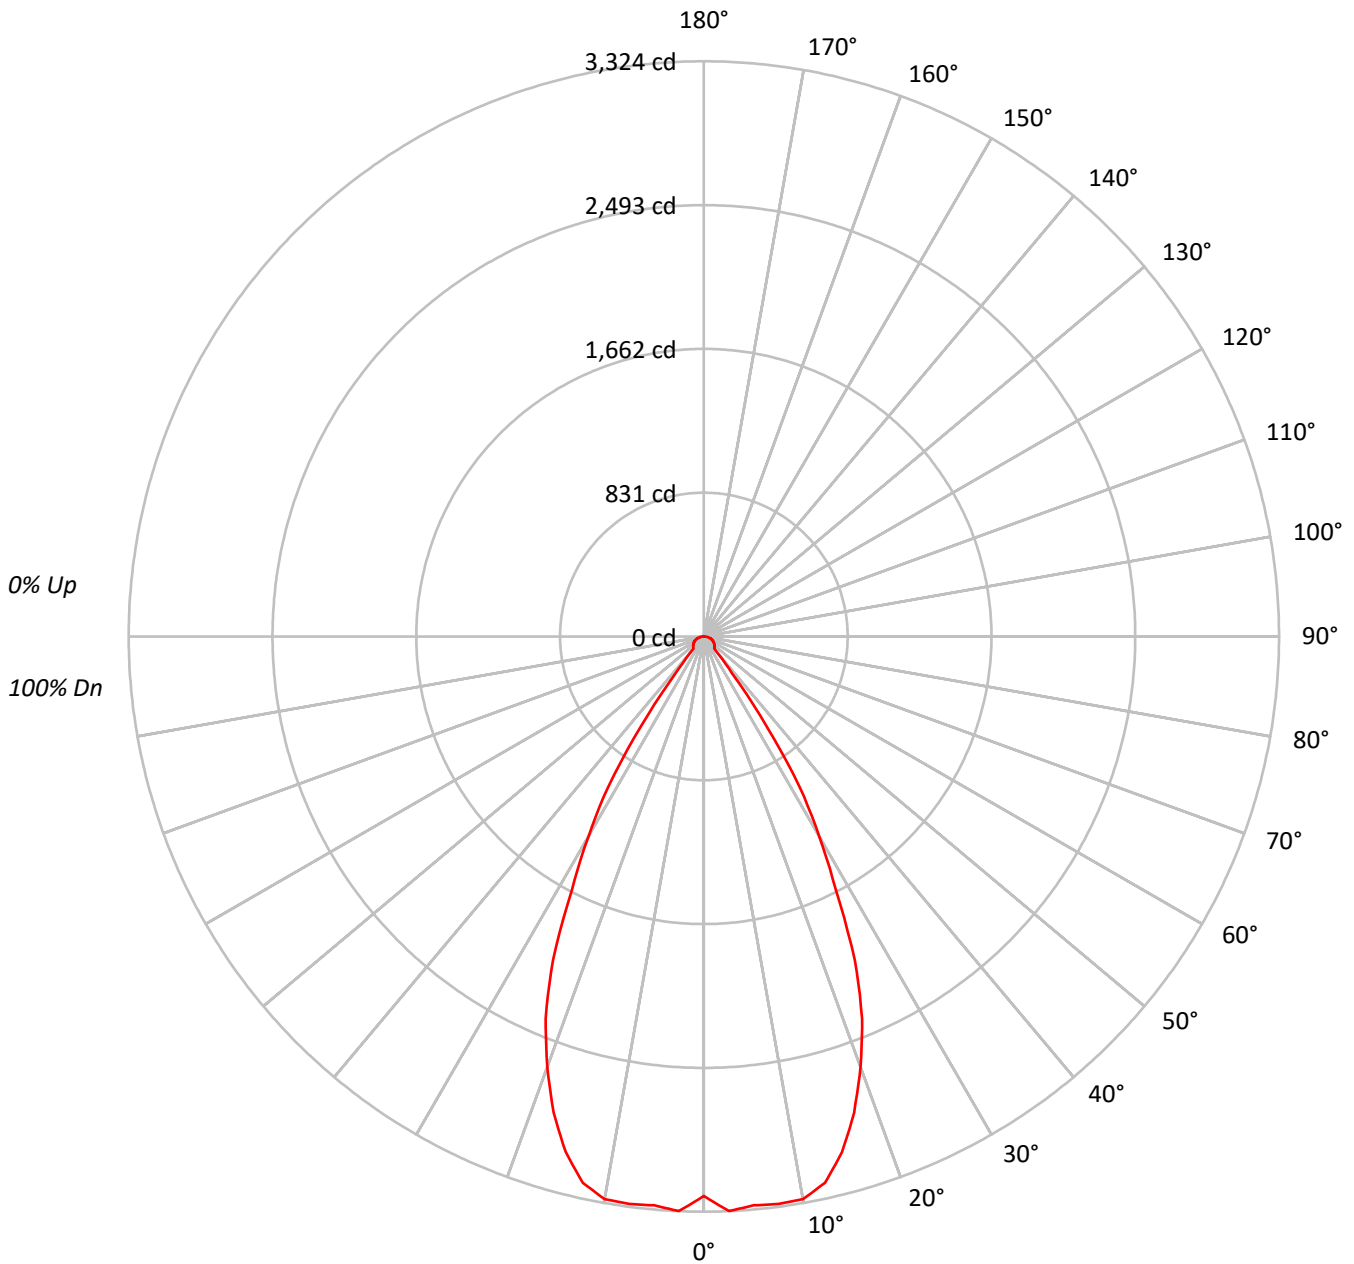



TEST NUMBER: P745554

CATALOG NUMBER: LD4D25D010-EU4DR6020359040-4LBDP1LI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93																			
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	92	90	88	86																			
3	102	96	90	86	100	94	89	86	91	88	84	89	86	83	87	84	82	80																			
4	97	89	84	80	95	88	83	79	86	82	78	84	80	77	82	79	76	75																			
5	92	84	78	74	91	83	78	74	81	77	73	80	76	72	78	75	72	70																			
6	88	79	73	69	87	78	73	69	77	72	68	75	71	68	74	70	67	66																			
7	84	75	69	65	83	74	68	64	73	68	64	72	67	64	71	67	63	62																			
8	80	71	65	61	79	70	65	61	69	64	60	68	64	60	67	63	60	59																			
9	77	67	61	57	75	67	61	57	66	61	57	65	60	57	64	60	57	55																			
10	73	64	58	54	72	63	58	54	62	58	54	62	57	54	61	57	54	53																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	353207
5°	361894
10°	366256
15°	348915
20°	307635
25°	248815
30°	168315
35°	84338
40°	13678
45°	13397
50°	13649
55°	13868
60°	14248
65°	14581
70°	14919
75°	15113
80°	14535
85°	12160

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 75°  
 Luminance: 15113 cd/sqm



TEST NUMBER: P745554

CATALOG NUMBER: LD4D25D010-EU4DR6020359040-4LBDP1LI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	315.4	11.6
10°-20°	853.2	31.3
20°-30°	918.0	33.7
30°-40°	399.0	14.7
40°-50°	67.0	2.5
50°-60°	65.2	2.4
60°-70°	55.7	2.0
70°-80°	37.3	1.4
80°-90°	11.2	0.4
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2086.6	76.7
0°-40°	2485.6	91.3
0°-60°	2617.7	96.2
0°-90°	2721.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2721.9	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3233	
5°	3300	315
15°	3085	853
25°	2064	918
35°	632	399
45°	87	67
55°	73	65
65°	56	56
75°	36	37
85°	10	11
90°	0	



TEST NUMBER: P745554

CATALOG NUMBER: LD4D25D010-EU4DR6020359040-4LBDP1LI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	3232.7
2.5°	3323.6
5°	3299.6
7.5°	3307.1
10°	3301.2
12.5°	3233.1
15°	3084.6
17.5°	2885.2
20°	2645.8
22.5°	2389.6
25°	2063.9
27.5°	1650.8
30°	1334.1
32.5°	1028.2
35°	632.3
37.5°	270.5
40°	95.9
42.5°	88.3
45°	86.7
47.5°	83.7
50°	80.3
52.5°	76.5
55°	72.8
57.5°	69.0
60°	65.2
62.5°	61.0
65°	56.4
67.5°	51.7
70°	46.7
72.5°	41.3
75°	35.8
77.5°	29.4
80°	23.1
82.5°	16.4
85°	9.7
87.5°	3.4
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)