

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745633

Luminaire Tested: LD4D25D010-EU4DR6520359040-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P745633
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR6520359040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1954.4 lumens
Efficiency: N/A
Efficacy: 77.9 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745633

CATALOG NUMBER: LD4D25D010-EU4DR6520359040-4LBDP1MW

Luminous Intensity Polar Plot

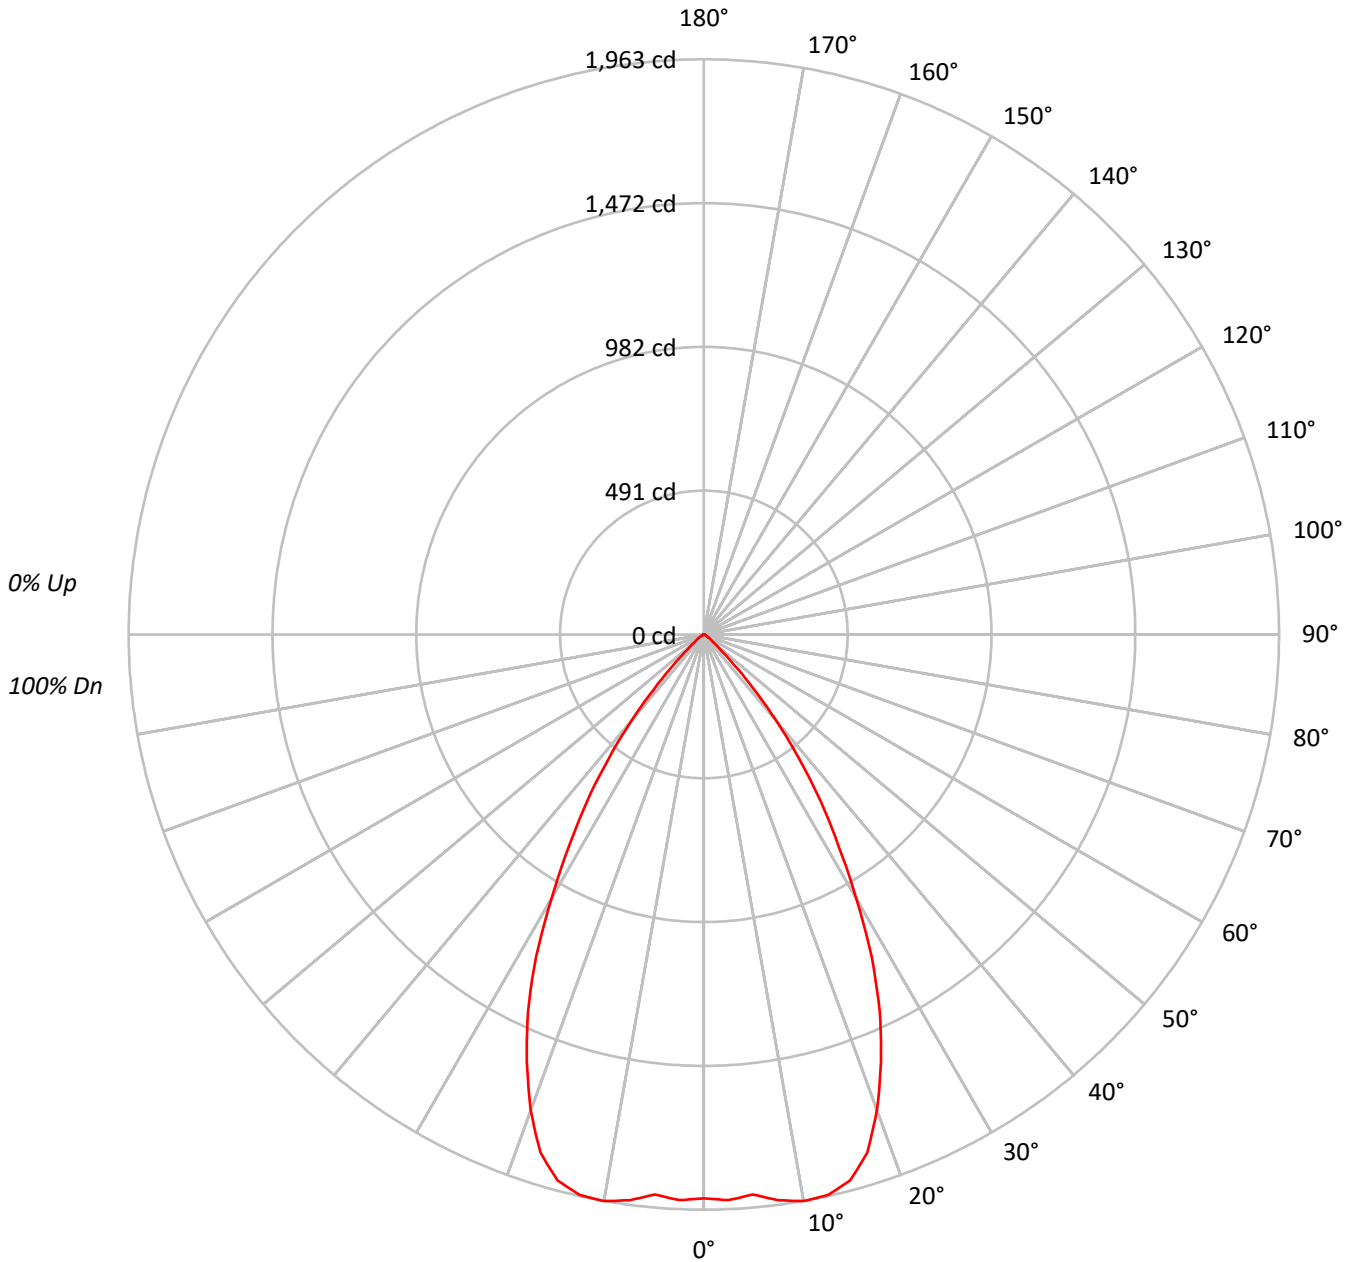



TEST NUMBER: P745633

CATALOG NUMBER: LD4D25D010-EU4DR6520359040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	210229
5°	210406
10°	217821
15°	218176
20°	200873
25°	171153
30°	131021
35°	92568
40°	54641
45°	22189
50°	8040
55°	4477
60°	2557
65°	1396
70°	1470
75°	1182
80°	1195
85°	1003

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 22189 cd/sqm



TEST NUMBER: P745633

CATALOG NUMBER: LD4D25D010-EU4DR6520359040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.3	9.5
10°-20°	534.5	27.3
20°-30°	641.2	32.8
30°-40°	430.9	22.1
40°-50°	129.0	6.6
50°-60°	22.8	1.2
60°-70°	6.4	0.3
70°-80°	3.2	0.2
80°-90°	1.0	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1361.0	69.6
0°-40°	1791.9	91.7
0°-60°	1943.7	99.5
0°-90°	1954.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1954.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1924	
5°	1918	185
15°	1929	534
25°	1420	641
35°	694	431
45°	144	129
55°	24	23
65°	5	6
75°	3	3
85°	1	1
90°	0	



TEST NUMBER: P745633

CATALOG NUMBER: LD4D25D010-EU4DR6520359040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	1924.1
2.5°	1932.4
5°	1918.4
7.5°	1947.4
10°	1963.3
12.5°	1959.4
15°	1928.8
17.5°	1853.9
20°	1727.6
22.5°	1578.8
25°	1419.7
27.5°	1240.0
30°	1038.5
32.5°	855.9
35°	694.0
37.5°	534.0
40°	383.1
42.5°	250.2
45°	143.6
47.5°	76.0
50°	47.3
52.5°	32.8
55°	23.5
57.5°	17.0
60°	11.7
62.5°	7.7
65°	5.4
67.5°	4.9
70°	4.6
72.5°	3.6
75°	2.8
77.5°	2.5
80°	1.9
82.5°	1.4
85°	0.8
87.5°	0.6
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)