

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745711

Luminaire Tested: LD4D25D010-EU4DR7020359040-4LBDP1MW

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P745711
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-73)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D25D010-EU4DR7020359040-4LBDP1MW
Description: 4 INCH ROUND DEEP 45° CUTOFF MATTE WHITE TRIM, WITH 70° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 4000K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2038.1 lumens
Efficiency: N/A
Efficacy: 81.2 lumens/watt
Spacing Criteria (0/90/45): 0.88 / 0.88 / 0.82
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 25.1
Input Voltage (V): NR
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P745711

CATALOG NUMBER: LD4D25D010-EU4DR7020359040-4LBDP1MW

Luminous Intensity Polar Plot

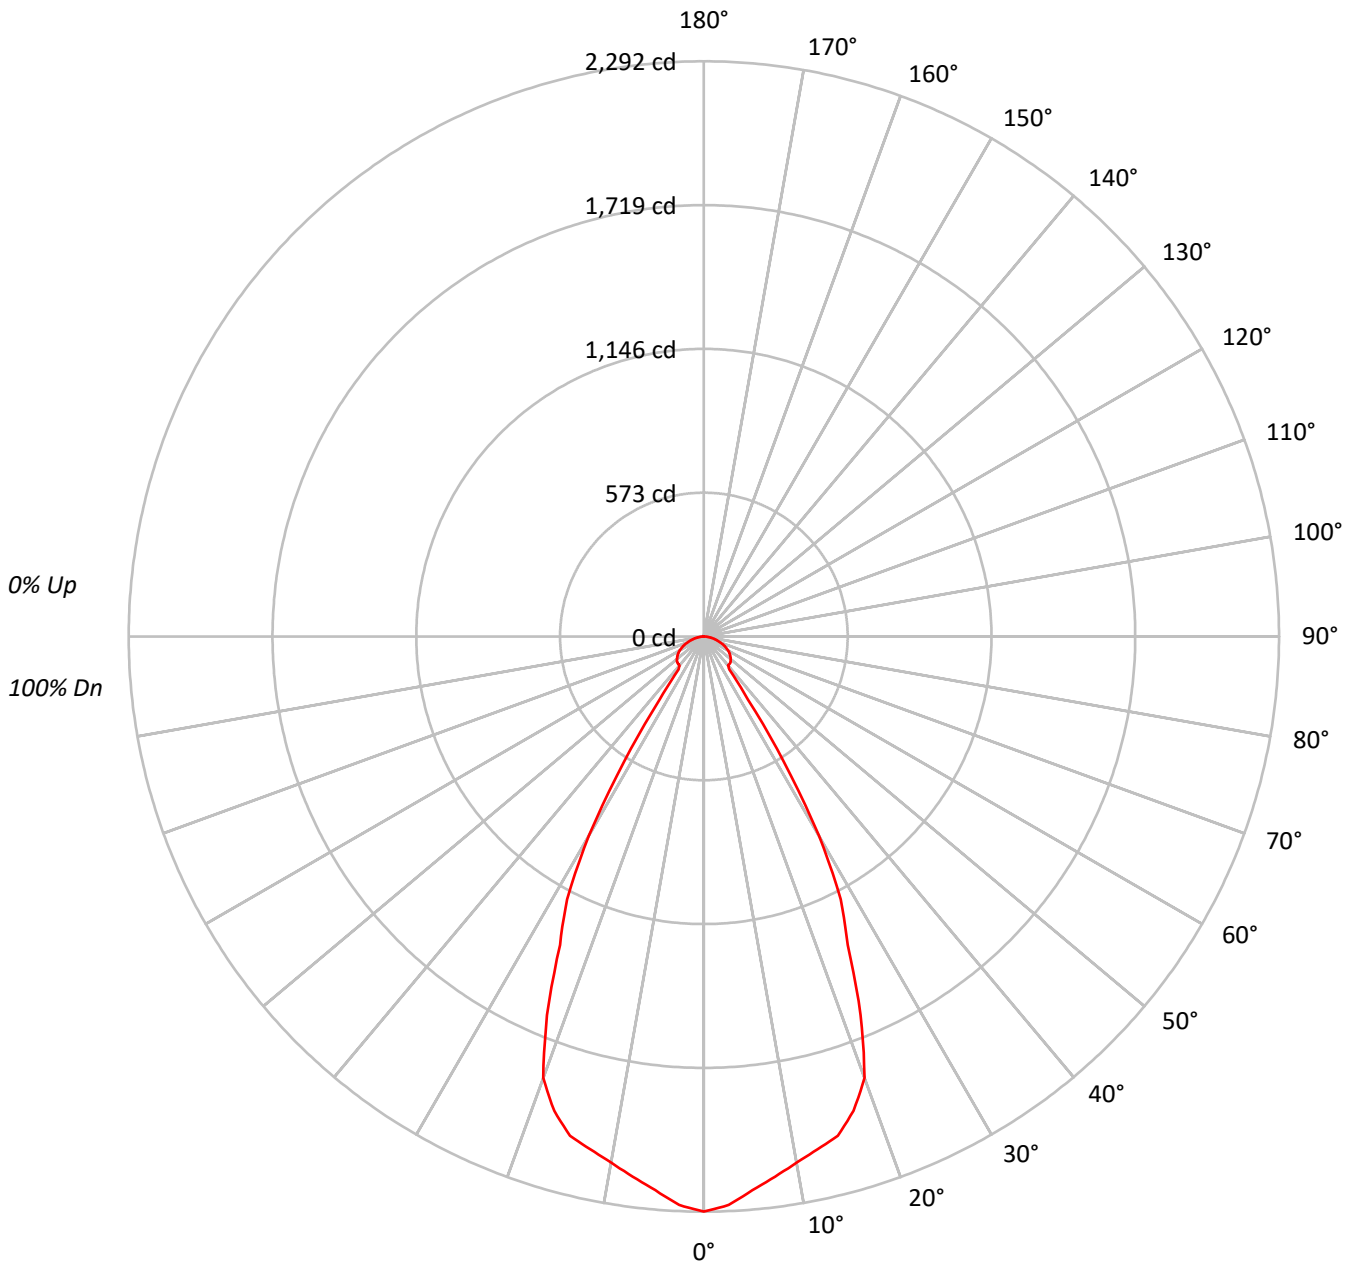



TEST NUMBER: P745711

CATALOG NUMBER: LD4D25D010-EU4DR7020359040-4LBDP1MW

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	103	110	107	104	102	103	101	99	99	97	96	95	94	93	91																			
2	106	100	95	91	103	98	94	90	95	91	88	92	89	86	89	87	85	83																			
3	100	92	87	82	98	91	86	81	88	84	80	86	82	79	83	80	78	76																			
4	94	86	80	75	92	85	79	74	82	77	73	80	76	73	78	75	72	70																			
5	89	80	74	69	87	79	73	69	77	72	68	75	71	67	74	70	67	65																			
6	85	75	68	64	83	74	68	64	73	67	63	71	66	63	70	66	62	61																			
7	80	70	64	59	79	70	64	59	68	63	59	67	62	59	66	62	58	57																			
8	77	66	60	56	75	66	60	56	65	59	55	64	59	55	63	58	55	53																			
9	73	63	57	52	72	62	56	52	61	56	52	60	55	52	60	55	52	50																			
10	70	59	53	49	69	59	53	49	58	53	49	57	52	49	57	52	49	48																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	250371
5°	242926
10°	236160
15°	233051
20°	217628
25°	163498
30°	115578
35°	40935
40°	21523
45°	22930
50°	23746
55°	24192
60°	24343
65°	23811
70°	22490
75°	20812
80°	18499
85°	15044

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 60°
 Luminance: 24343 cd/sqm



TEST NUMBER: P745711

CATALOG NUMBER: LD4D25D010-EU4DR7020359040-4LBDP1MW

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	208.9	10.3
10°-20°	573.0	28.1
20°-30°	631.1	31.0
30°-40°	241.1	11.8
40°-50°	113.8	5.6
50°-60°	113.2	5.6
60°-70°	90.6	4.4
70°-80°	52.1	2.6
80°-90°	14.2	0.7
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1413.1	69.3
0°-40°	1654.2	81.2
0°-60°	1881.3	92.3
0°-90°	2038.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2038.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	2292	
5°	2215	209
15°	2060	573
25°	1356	631
35°	307	241
45°	148	114
55°	127	113
65°	92	91
75°	49	52
85°	12	14
90°	0	



TEST NUMBER: P745711

CATALOG NUMBER: LD4D25D010-EU4DR7020359040-4LBDP1MW

CANDELA DISTRIBUTION (FULL):

	0°
0°	2291.5
2.5°	2267.5
5°	2214.9
7.5°	2171.0
10°	2128.6
12.5°	2092.6
15°	2060.3
17.5°	1982.4
20°	1871.7
22.5°	1633.0
25°	1356.2
27.5°	1180.6
30°	916.1
32.5°	591.7
35°	306.9
37.5°	165.8
40°	150.9
42.5°	149.8
45°	148.4
47.5°	145.1
50°	139.7
52.5°	133.5
55°	127.0
57.5°	119.7
60°	111.4
62.5°	101.9
65°	92.1
67.5°	81.2
70°	70.4
72.5°	59.5
75°	49.3
77.5°	38.8
80°	29.4
82.5°	20.7
85°	12.0
87.5°	4.7
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)