

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745826

Luminaire Tested: LD4D30D010-EU4DR2015309027-4LBDP1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745826  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR2015309027-4LBDP1H  
Description: 4 INCH ROUND DEEP 45° CUTOFF SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2748.5 lumens  
Efficiency: N/A  
Efficacy: 94.8 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745826  
CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBDP1H

### Luminous Intensity Polar Plot

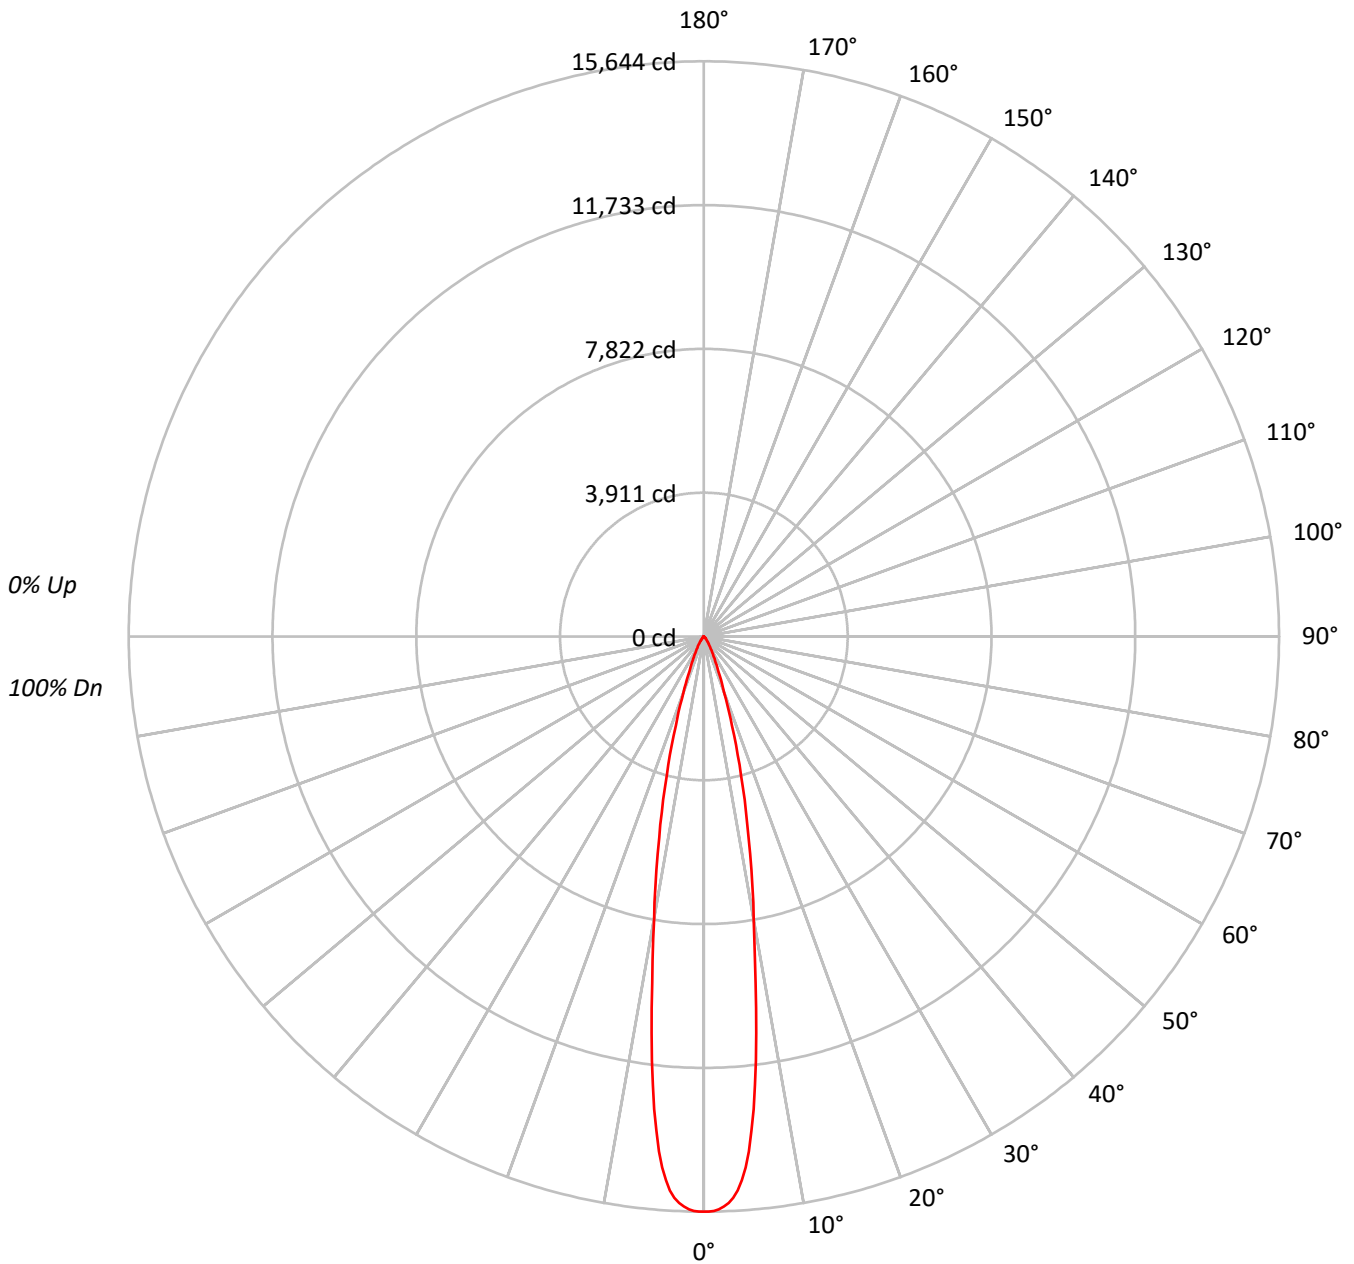



TEST NUMBER: P745826

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBDP1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100															
1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	98	98	97															
2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	98	96	95															
3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	98	93	92															
4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	93	91	89															
5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	91	88	86															
6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	88	86	84															
7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	86	84	82															
8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	79	84	82	80															
9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	77	82	80	78															
10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	75	81	78	76															

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1709264
5°	1542074
10°	865492
15°	439950
20°	186269
25°	85980
30°	45520
35°	24529
40°	13108
45°	7741
50°	4504
55°	2381
60°	1530
65°	1086
70°	447
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 7741 cd/sqm



TEST NUMBER: P745826

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBDP1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1113.8	40.5
10°-20°	1096.8	39.9
20°-30°	358.3	13.0
30°-40°	122.0	4.4
40°-50°	41.0	1.5
50°-60°	12.4	0.4
60°-70°	4.1	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2568.9	93.5
0°-40°	2690.9	97.9
0°-60°	2744.2	99.8
0°-90°	2748.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2748.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	15644	
5°	14060	###
15°	3889	1097
25°	713	358
35°	184	122
45°	50	41
55°	12	12
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745826

CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBDP1H

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	15643.9
0.5°	15643.9
1°	15624.4
1.5°	15585.3
2°	15514.3
2.5°	15419.6
3°	15285.8
3.5°	15099.2
4°	14822.0
4.5°	14484.8
5°	14060.0
5.5°	13501.4
6°	12928.8
6.5°	12272.7
7°	11630.5
7.5°	10878.3
8°	10206.8
8.5°	9531.2
9°	8907.1
9.5°	8334.6
10°	7801.0
12.5°	5601.4
15°	3889.4
17.5°	2540.9
20°	1602.0
22.5°	1037.8
25°	713.2
27.5°	501.5
30°	360.8
32.5°	259.1
35°	183.9
37.5°	128.2
40°	91.9
42.5°	66.9
45°	50.1
47.5°	39.0
50°	26.5
52.5°	16.7
55°	12.5
57.5°	9.8
60°	7.0
62.5°	5.6
65°	4.2



TEST NUMBER: P745826  
CATALOG NUMBER: LD4D30D010-EU4DR2015309027-4LBDP1H

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report





67.5°		2.8
70°		1.4

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)