

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P746527

Luminaire Tested: LD4D30D010-EU4DR6520359027-4LBDP1B

Issue Date: 2/5/2024

Test Information

Test Method: LM-79-2019
Report Number: P746527
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2307-078-59)
Test Lab: COOPER LIGHTING SOLUTIONS
Issue Date: 2/5/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: PORTFOLIO
Catalog Number: LD4D30D010-EU4DR6520359027-4LBDP1B
Description: 4 INCH ROUND DEEP 45° CUTOFF SPECULAR BLACK TRIM, WITH 65° OPTIC
Light Source: (1) HIGH LUMEN LED 90CRI / 2700K CCT
Ballast/Driver: -

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1692.9 lumens
Efficiency: N/A
Efficacy: 58.4 lumens/watt
Spacing Criteria (0/90/45): 0.98 / 0.98 / 0.92
Luminous Opening: Circular (Dia: 0.35' x H: 0')
CIE Type: Direct

Input Watts (W): 29
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT




Downlight



TEST NUMBER: P746527

CATALOG NUMBER: LD4D30D010-EU4DR6520359027-4LBDP1B

Luminous Intensity Polar Plot

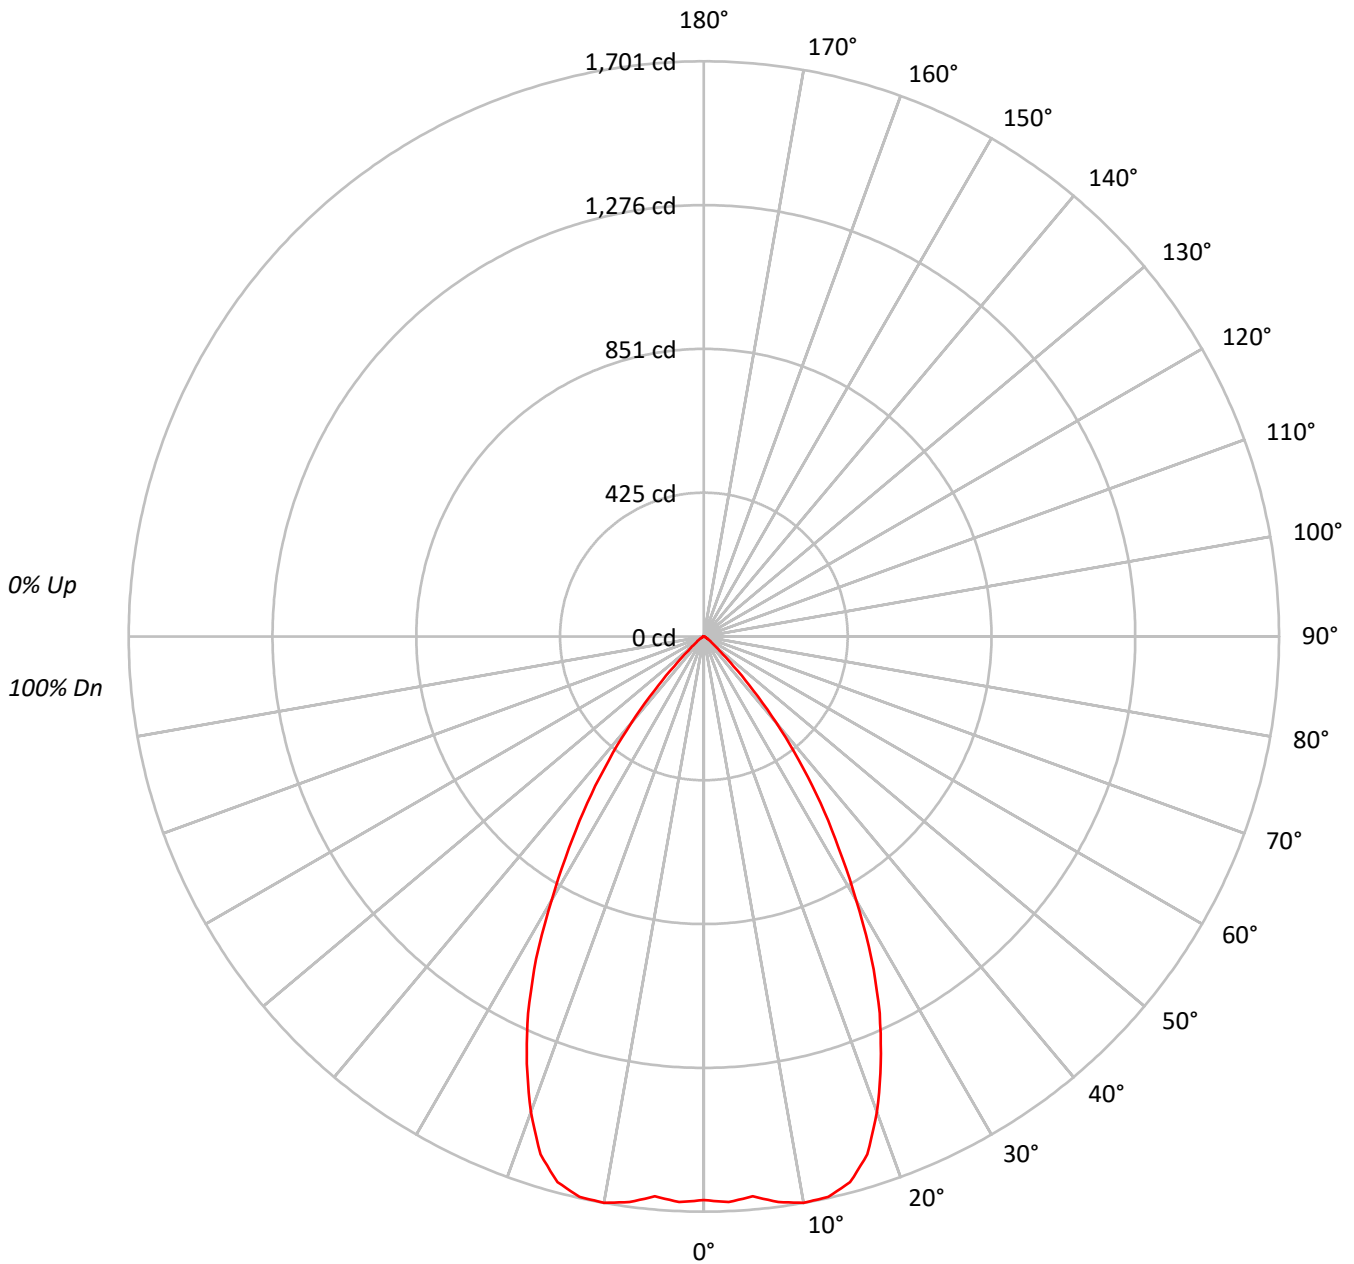



TEST NUMBER: P746527

CATALOG NUMBER: LD4D30D010-EU4DR6520359027-4LBDP1B

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	108	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	80			
4	97	89	84	79	95	88	83	79	86	82	78	84	80	77	82	79	76	75			
5	92	83	78	73	90	83	77	73	81	76	72	79	75	72	77	74	71	69			
6	87	78	72	68	86	77	72	68	76	71	67	74	70	67	73	69	66	65			
7	83	73	67	63	81	73	67	63	71	66	62	70	66	62	69	65	62	60			
8	79	69	63	59	77	68	63	59	67	62	58	66	62	58	65	61	58	57			
9	75	65	59	55	74	65	59	55	64	58	55	63	58	55	62	58	54	53			
10	71	61	56	52	70	61	55	52	60	55	51	59	55	51	59	54	51	50			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	182116
5°	182263
10°	188686
15°	188993
20°	174002
25°	148260
30°	113497
35°	80176
40°	47339
45°	19207
50°	6969
55°	3886
60°	2229
65°	1241
70°	1278
75°	971
80°	1070
85°	878

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 19207 cd/sqm



TEST NUMBER: P746527

CATALOG NUMBER: LD4D30D010-EU4DR6520359027-4LBDP1B

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.5	9.5
10°-20°	463.0	27.3
20°-30°	555.5	32.8
30°-40°	373.3	22.1
40°-50°	111.7	6.6
50°-60°	19.7	1.2
60°-70°	5.6	0.3
70°-80°	2.7	0.2
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1179.0	69.6
0°-40°	1552.2	91.7
0°-60°	1683.7	99.5
0°-90°	1692.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1692.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1667	
5°	1662	160
15°	1671	463
25°	1230	555
35°	601	373
45°	124	112
55°	20	20
65°	5	6
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P746527

CATALOG NUMBER: LD4D30D010-EU4DR6520359027-4LBDP1B

CANDELA DISTRIBUTION (FULL):

	0°
0°	1666.8
2.5°	1673.9
5°	1661.8
7.5°	1686.9
10°	1700.7
12.5°	1697.4
15°	1670.8
17.5°	1606.0
20°	1496.5
22.5°	1367.7
25°	1229.8
27.5°	1074.2
30°	899.6
32.5°	741.4
35°	601.1
37.5°	462.6
40°	331.9
42.5°	216.7
45°	124.3
47.5°	65.8
50°	41.0
52.5°	28.4
55°	20.4
57.5°	14.7
60°	10.2
62.5°	6.6
65°	4.8
67.5°	4.2
70°	4.0
72.5°	3.1
75°	2.3
77.5°	2.1
80°	1.7
82.5°	1.2
85°	0.7
87.5°	0.5
90°	0.0

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal
Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)