

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

Brand: PORTFOLIO

Report Number: P745843

Luminaire Tested: LD4D30D010-EU4DR2015309030-4LBS1H

Issue Date: 2/2/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P745843  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2310-195-36)  
Test Lab: COOPER LIGHTING SOLUTIONS  
Issue Date: 2/2/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: PORTFOLIO  
Catalog Number: LD4D30D010-EU4DR2015309030-4LBS1H  
Description: 4 INCH ROUND SHALLOW SEMI-SPECULAR CLEAR TRIM, WITH 20° OPTIC  
Light Source: (1) HIGH LUMEN LED 90CRI / 3000K CCT  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2987.4 lumens  
Efficiency: N/A  
Efficacy: 103.0 lumens/watt  
Spacing Criteria (0/90/45): 0.34 / 0.34 / 0.36  
Luminous Opening: Circular (Dia: 0.35' x H: 0')  
CIE Type: Direct

Input Watts (W): 29  
Input Voltage (V): NR  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT




Downlight



TEST NUMBER: P745843  
CATALOG NUMBER: LD4D30D010-EU4DR2015309030-4LBS1H

### Luminous Intensity Polar Plot

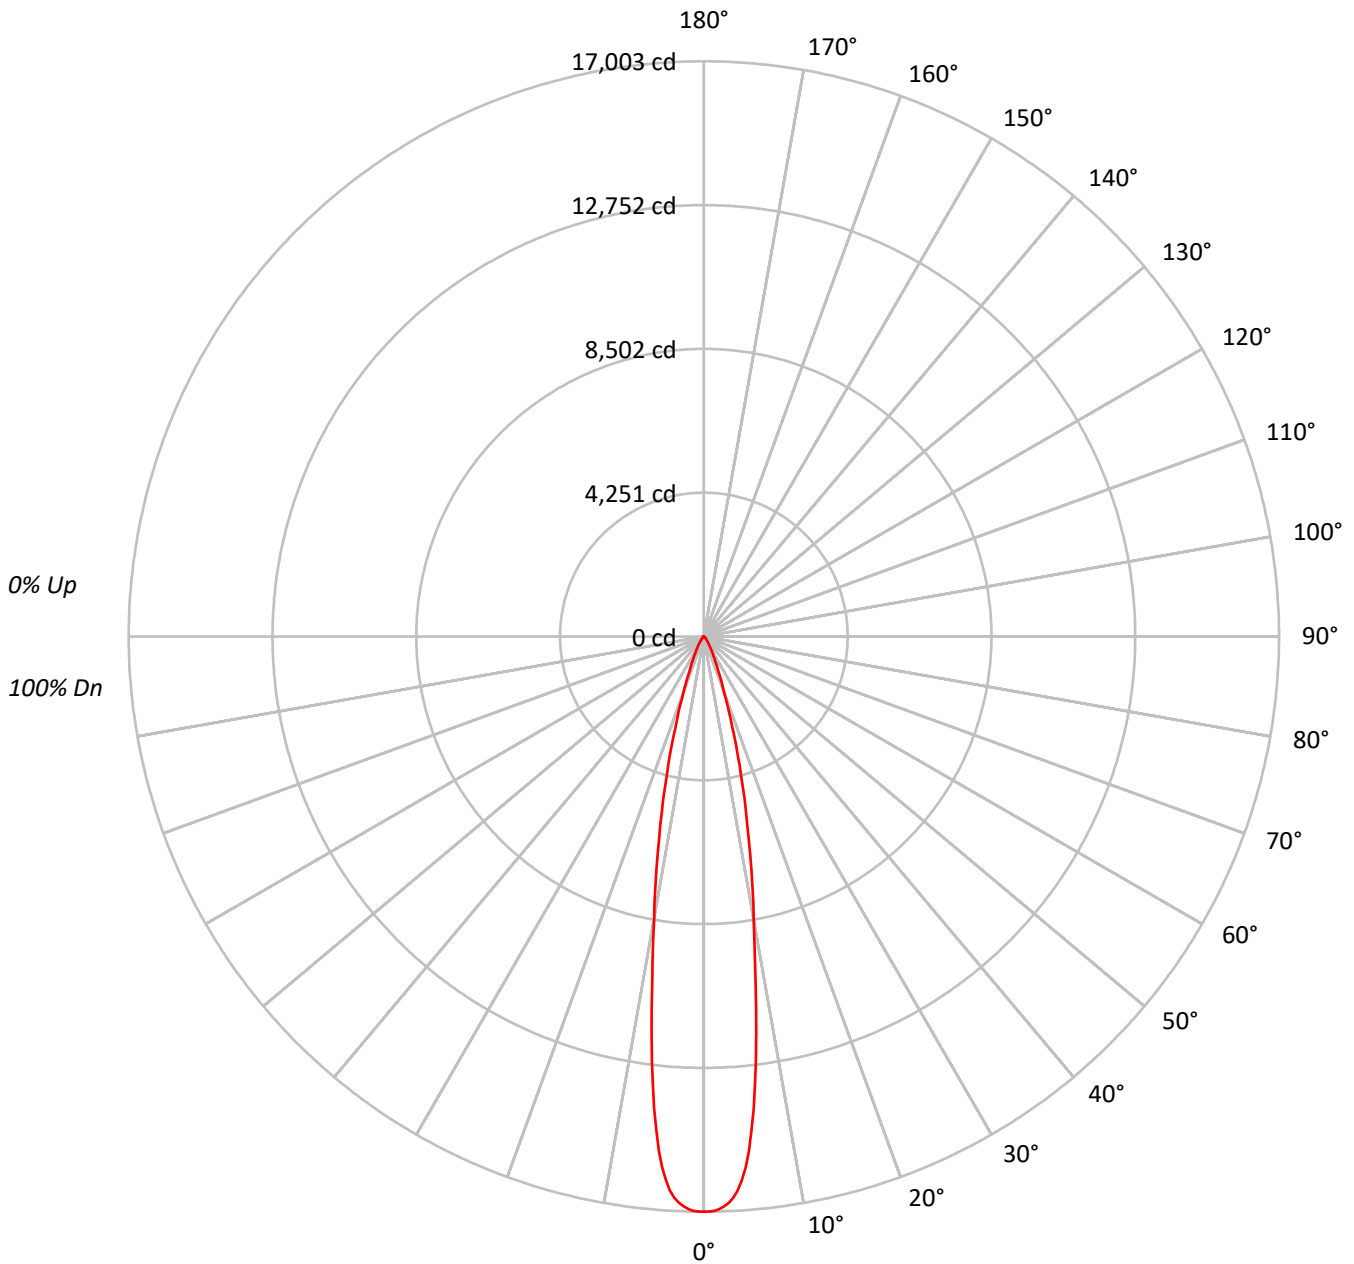



TEST NUMBER: P745843

CATALOG NUMBER: LD4D30D010-EU4DR2015309030-4LBS1H

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100	100	100	100	100	100																
	1	115	113	111	109	113	111	109	108	107	106	104	103	102	101	100	99	98	97	97	96	95	94	94	93	92	91	91	90																
	2	111	108	105	102	109	106	104	101	103	101	99	100	99	97	98	96	95	94	94	93	92	91	91	90	89	88	88	87																
	3	108	103	100	97	106	102	99	96	100	97	95	97	95	93	95	93	92	91	91	90	89	88	88	87	86	85	85	84																
	4	105	99	96	93	103	98	95	92	96	93	91	95	92	90	93	91	89	88	88	87	86	85	85	84	83	83	82	81																
	5	102	96	92	89	100	95	91	89	94	90	88	92	89	87	91	88	86	85	85	84	83	83	82	81	81	80	79	78																
	6	99	93	89	86	98	92	88	86	91	87	85	90	87	84	88	86	84	83	83	82	81	81	80	79	78	77	77	76																
	7	96	90	86	83	95	89	86	83	88	85	82	87	84	82	86	84	82	81	81	80	79	78	77	76	75	75	74	73																
	8	94	87	83	81	93	87	83	80	86	83	80	85	82	80	84	82	80	79	78	78	77	76	75	74	73	72	71	70																
	9	91	85	81	78	91	85	81	78	84	80	78	83	80	78	82	80	78	77	76	76	75	74	73	72	71	70	69	68																
	10	89	83	79	76	88	82	79	76	82	78	76	81	78	76	81	78	76	75	74	74	73	72	71	70	69	68	67	66																

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	1857804
5°	1676079
10°	940713
15°	478183
20°	202454
25°	93455
30°	49481
35°	26663
40°	14249
45°	8421
50°	4895
55°	2591
60°	1661
65°	1163
70°	479
75°	0
80°	0
85°	0

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 8421 cd/sqm



TEST NUMBER: P745843

CATALOG NUMBER: LD4D30D010-EU4DR2015309030-4LBS1H

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	1210.6	40.5
10°-20°	1192.1	39.9
20°-30°	389.4	13.0
30°-40°	132.6	4.4
40°-50°	44.6	1.5
50°-60°	13.4	0.4
60°-70°	4.5	0.1
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2792.1	93.5
0°-40°	2924.7	97.9
0°-60°	2982.7	99.8
0°-90°	2987.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2987.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	17003	
5°	15282	###
15°	4227	1192
25°	775	389
35°	200	133
45°	54	45
55°	14	13
65°	4	4
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P745843

CATALOG NUMBER: LD4D30D010-EU4DR2015309030-4LBS1H

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	17003.4
0.5°	17003.4
1°	16982.2
1.5°	16939.8
2°	16862.5
2.5°	16759.6
3°	16614.2
3.5°	16411.3
4°	16110.0
4.5°	15743.6
5°	15281.8
5.5°	14674.7
6°	14052.4
6.5°	13339.2
7°	12641.2
7.5°	11823.6
8°	11093.8
8.5°	10359.5
9°	9681.2
9.5°	9058.9
10°	8479.0
12.5°	6088.2
15°	4227.4
17.5°	2761.7
20°	1741.2
22.5°	1128.0
25°	775.2
27.5°	545.1
30°	392.2
32.5°	281.6
35°	199.9
37.5°	139.3
40°	99.9
42.5°	72.7
45°	54.5
47.5°	42.4
50°	28.8
52.5°	18.2
55°	13.6
57.5°	10.6
60°	7.6
62.5°	6.1
65°	4.5



TEST NUMBER: P745843  
CATALOG NUMBER: LD4D30D010-EU4DR2015309030-4LBS1H

**CANDELA DISTRIBUTION (continued):**

	0°
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Report Generated By 670245859 / DESKTOP-T8S5UU9



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



— 0°-180°

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



67.5°		3.0
70°		1.5

Signify Classified - Internal  
Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269

Scaled Data Report



(END OF REPORT)